Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 1/28/2019 (ENSO Neutral Condition)

Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method[1], the SFWMD empirical method[2], a sub-sampling of Neutral years[3] and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with La Nina ENSO years[4]. The results for Croley's method and the SFWMD empirical method are based on the CPC Outlook.

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season	Croley's Method[1*]		SFWMD Empirical Method[2]		Sub-sampling of Neutral ENSO Years[3]		Sub-sampling of AMO Warm + Neutral ENSO Years[4]	
	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition
Current (Jan-Jun)	N/A	N/A	0.56	Dry	1.16	Normal	0.22	Dry
Multi Seasonal (Jan-Oct)	N/A	N/A	3.08	Wet	3.56	Wet	2.16	Normal

*Croley's Method Not Produced for This Report

See Seasonal and Multi-Seasonal tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

**Sub-sampling is a weighted average of ENSO conditions based on the ENSO forecast used.

Tributary Hydrologic Conditions Graph:

1415 cfs 14-day running average for Lake Okeechobee Net Inflow through 1/28/2019.
According to the classification in Tributary Hydrologic Conditions table, this condition is Normal.

-1.20 for Palmer Index on 1/26/2019.
According to the classification in Tributary Hydrologic Conditions table, this condition is Normal.

The wetter of the two conditions above is **Normal**.

LORS2008 Classification Tables:

Lake Okeechobee Stage on 1/28/2019

Lake Okeechobee Stage: **12.45 feet**

USACE Report for Lake Okeechobee

Lake Okeechobee Stage Hydrograph

Lake Okeechobee Management Zone/Band		Bottom Elevation (feet, NGVD)	Current Lake Stage
High Lake Management Band		17.25	
Operational Band	High sub-band	16.77	
	Intermediate sub-band	16.03	
	Low sub-band	13.71	
Base Flow sub-band		12.60	
Beneficial Use sub-band			← 12.45
Water Shortage Management Band		12.02	

Part C of LORS2008: Discharge to WCA's

Lake Okeechobee stage is within the Beneficial Use Sub-band therefore, no releases to the WCAs to manage lake stages.

Part D of LORS2008: Discharge to Tidewater

Lake Okeechobee stage is within the Beneficial Use Sub-band therefore, no releases to the St. Lucie or Caloosahatchee Estuaries to manage lake stages.

Adaptive Protocol's Release Guidance: Caloosahatchee Estuary

Release Guidance Flow Chart Outcome: No releases.

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers LORSS Homepage

LORS2008 Implementation on 01/28/2019 (ENSO Neutral Condition):

Status for week ending 01/28/2019:

District wide, Raindar rainfall was 3.64 inches for the week. Lake stage on 01/28/2019 was12.45 ft, NGVD, up 0.17 ft from last week .The updated January 2019 SFWMM Dynamic Position Analysis percentile graph for Lake Okeechobee show that the current lake stage is in the Beneficial Use Sub-band. The LORS2008 Tributary Hydrologic Condition (THC) is classified as **Normal.** The PDSI indicates normal conditions and the LONIN is normal. The THC classification is based on the wetter of the two indices

Water Supply Risk Evaluation

Area	Indicator	Value	Color Coded Scoring Scheme
LOK	Projected LOK Stage for the next two months	Beneficial Use Sub Band	M
	Palmer Index for LOK Tributary Conditions	-1.20 (Dry)	M
	CPC Precipitation Outlook	1 month: Normal	L
		3 months: Above Normal	L
	LOK Seasonal Net Inflow Outlook	1.16 ft (Normal)	L
	ENSO Forecast (positive)		
	LOK Multi-Seasonal Net Inflow Outlook	3.56 ft (Wet)	L
	ENSO Forecast (positive)		
WCAs	WCA 1: Site 1-7, Site 1-8T, & Site 1-9 Average	Above Line 1 (16.52 ft)	L
	WCA 2A: Site 2-17 HW	Above Line 1 (11.97 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64 and 65)	Above Line 1 (9.56 ft)	L
LEC	Service Area 1	Year-Round Irrigation Rule in effect	L
	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L

Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow outlooks use slightly different classification intervals than those used by the 2008-LORS.

Lake Okeechobee SFWMM Jan 2019 Position Analysis

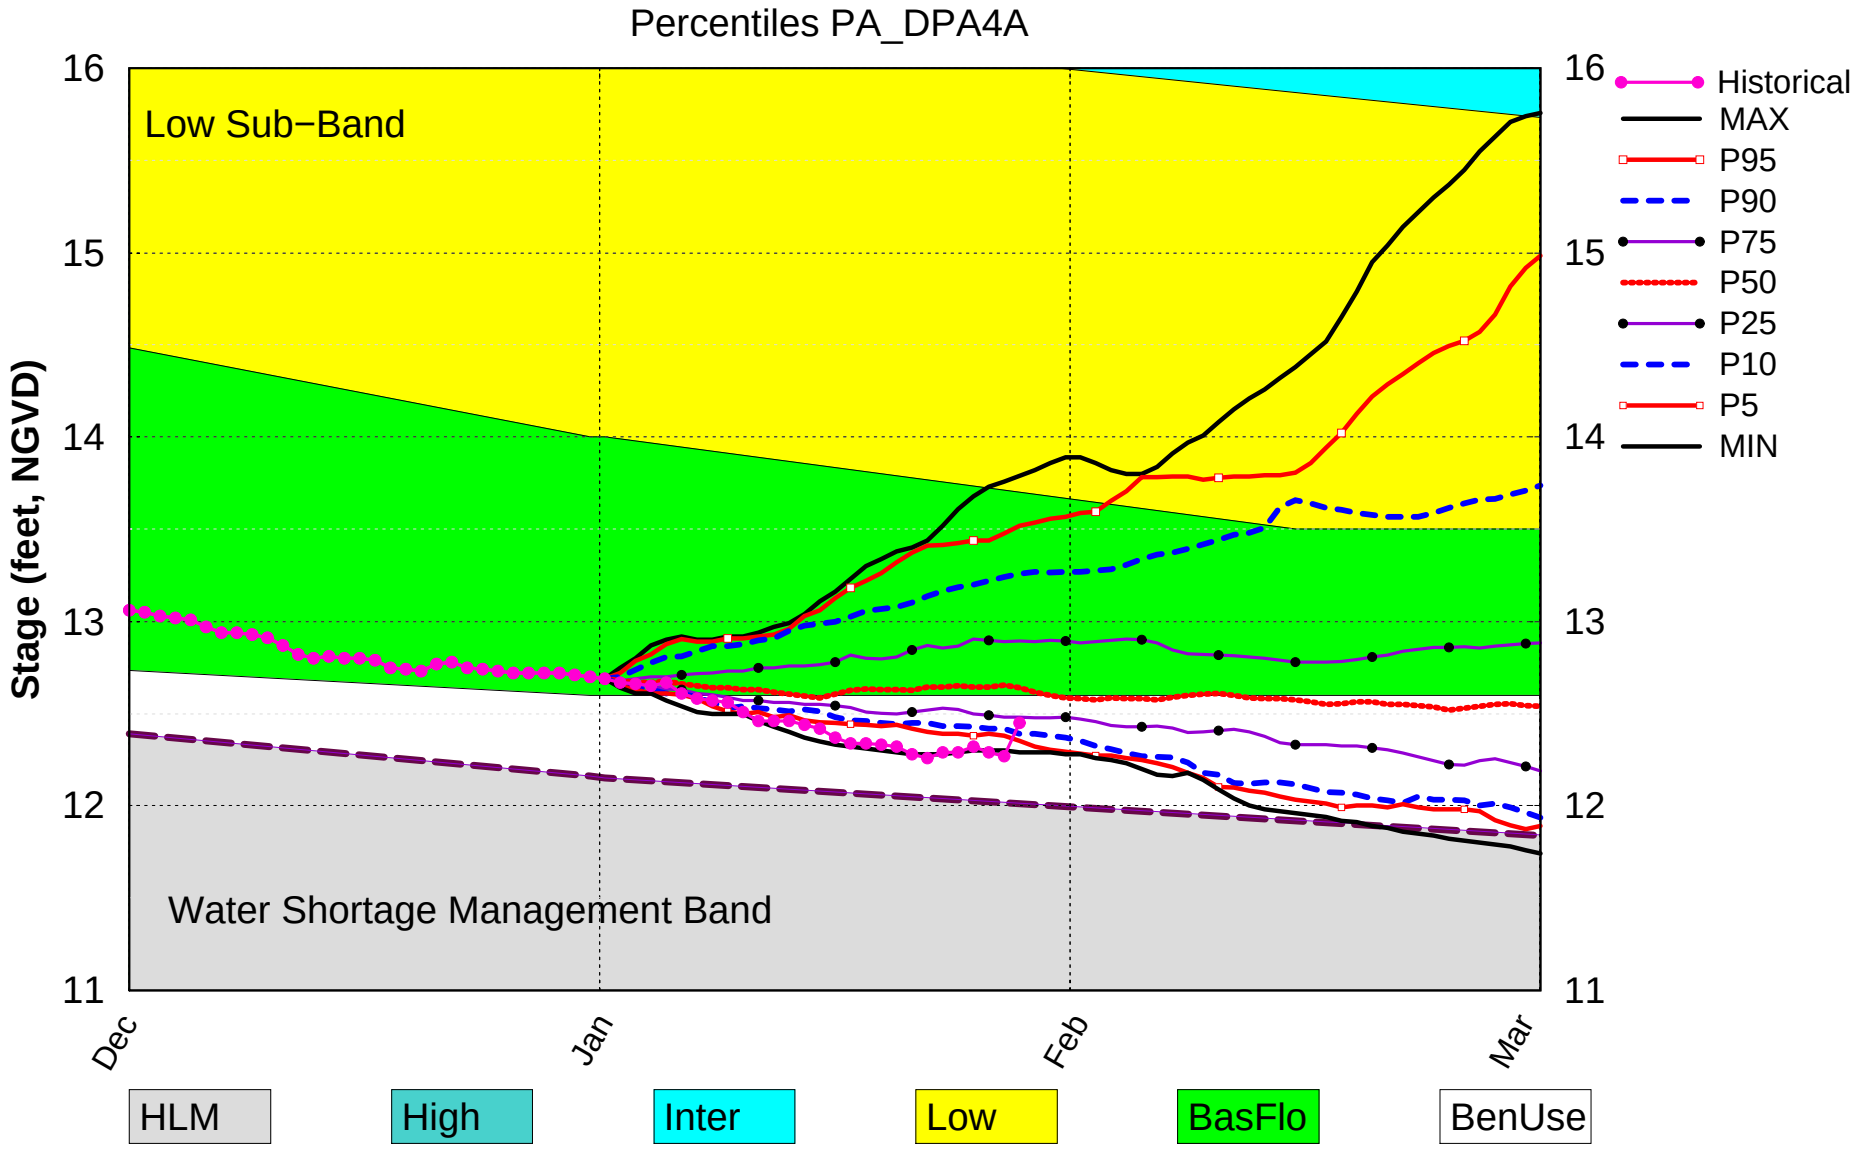

(See assumptions on the Position Analysis Results website)

Mon Jan 28 16:12:41 EST 2019

Tributary Basin Condition Indicators as of January 28 2019

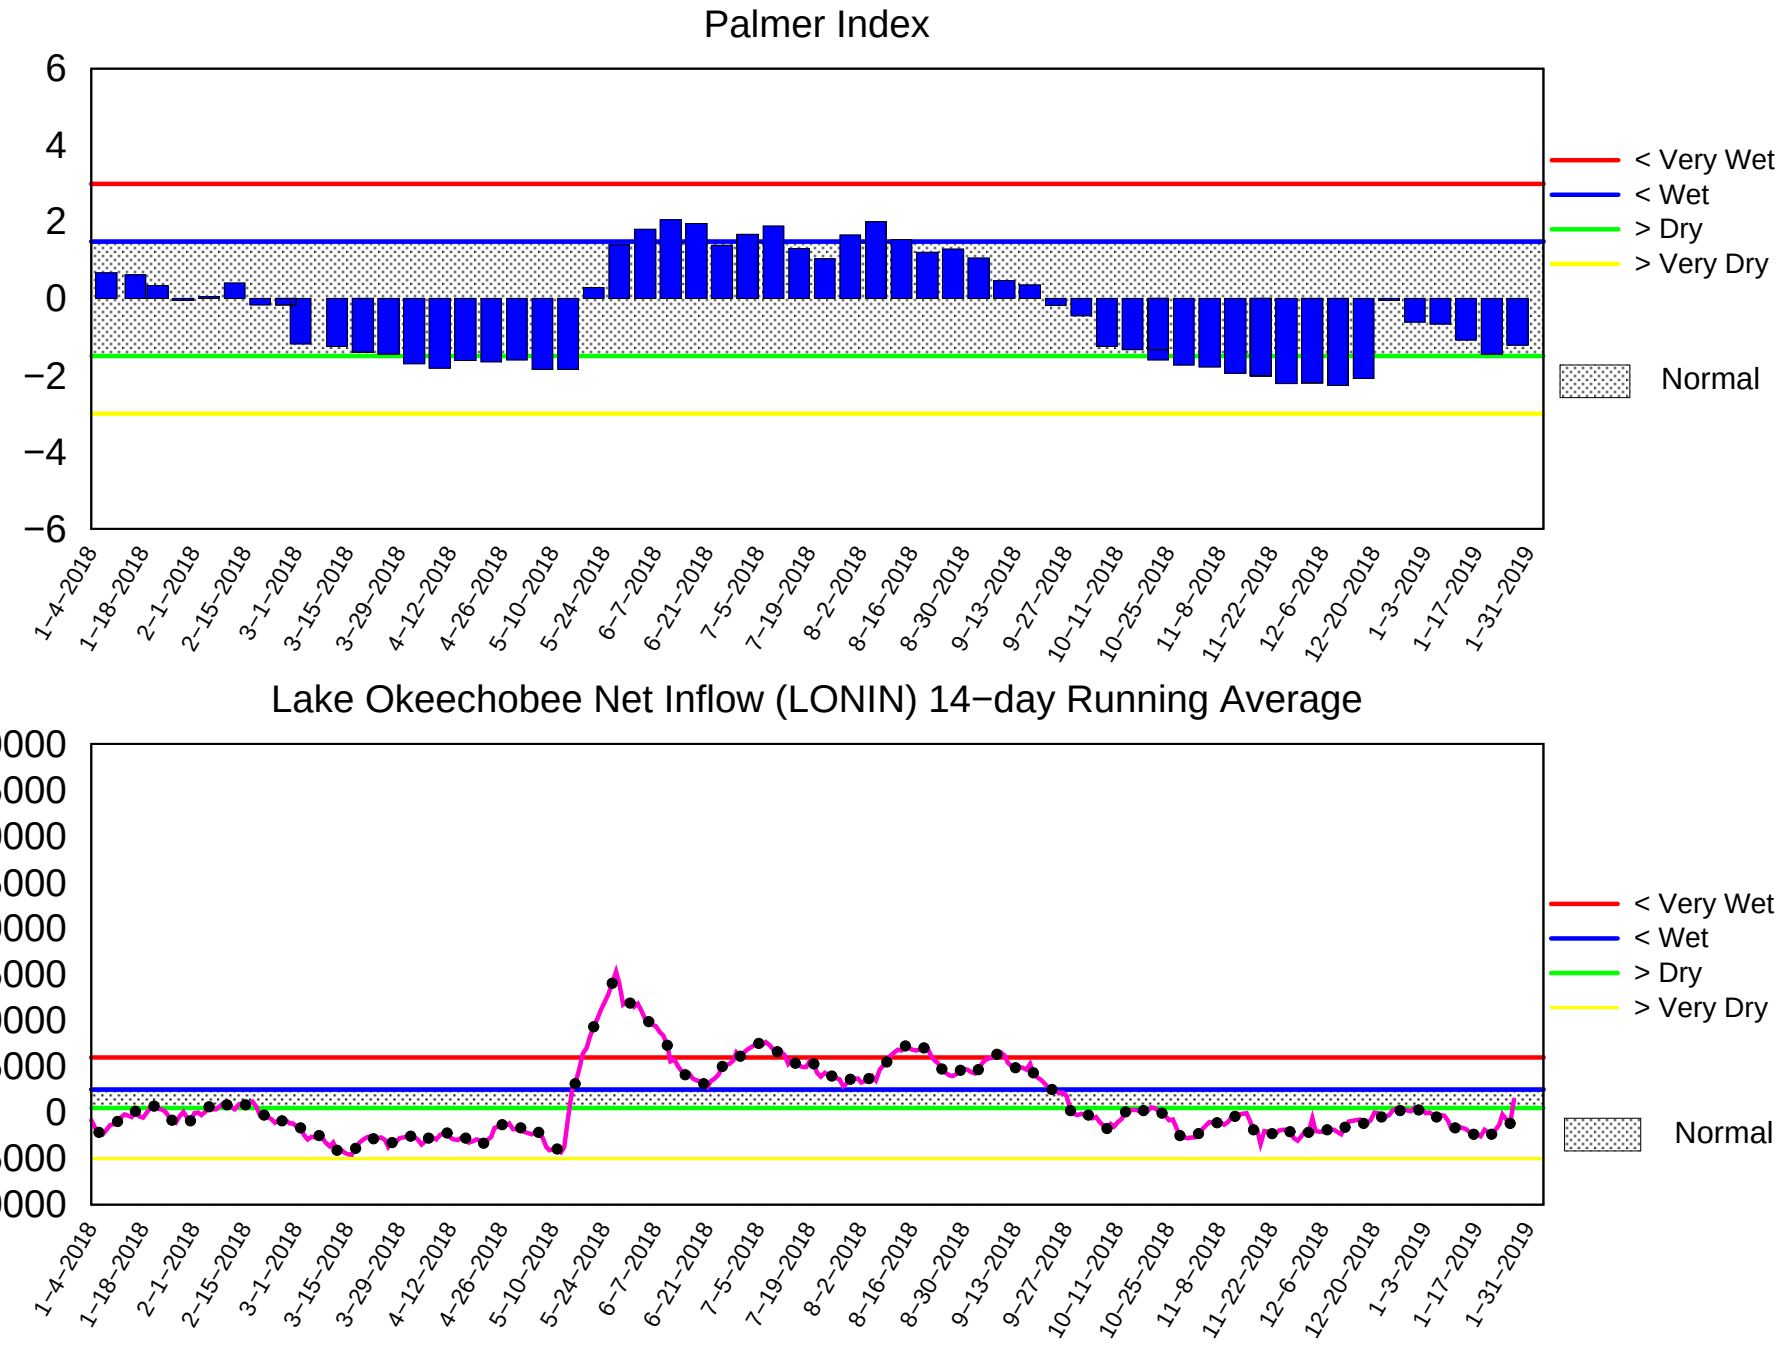

Mon Jan 28 16:11:54 EST 2019

2008 LORS

Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

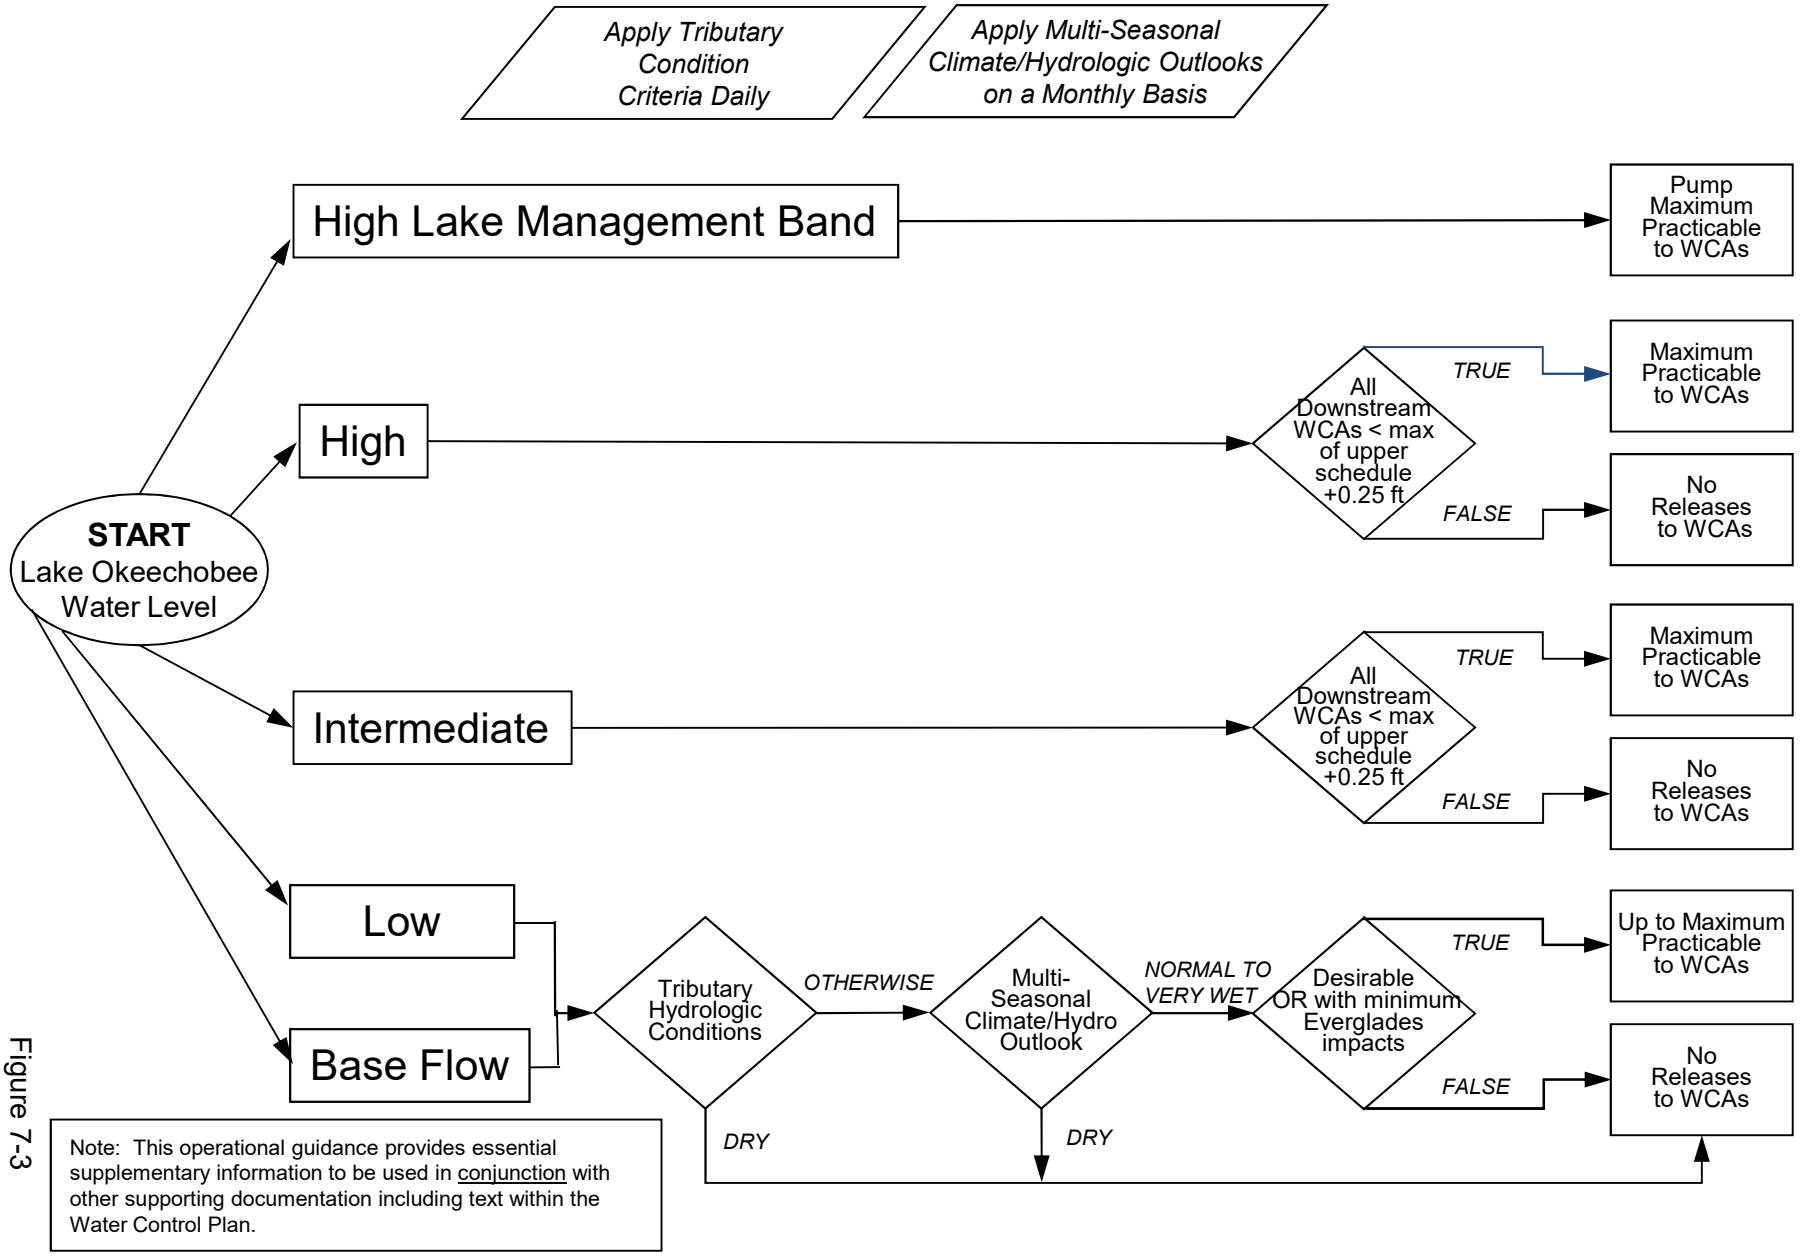

Figure 7-3

2008 LORS

Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

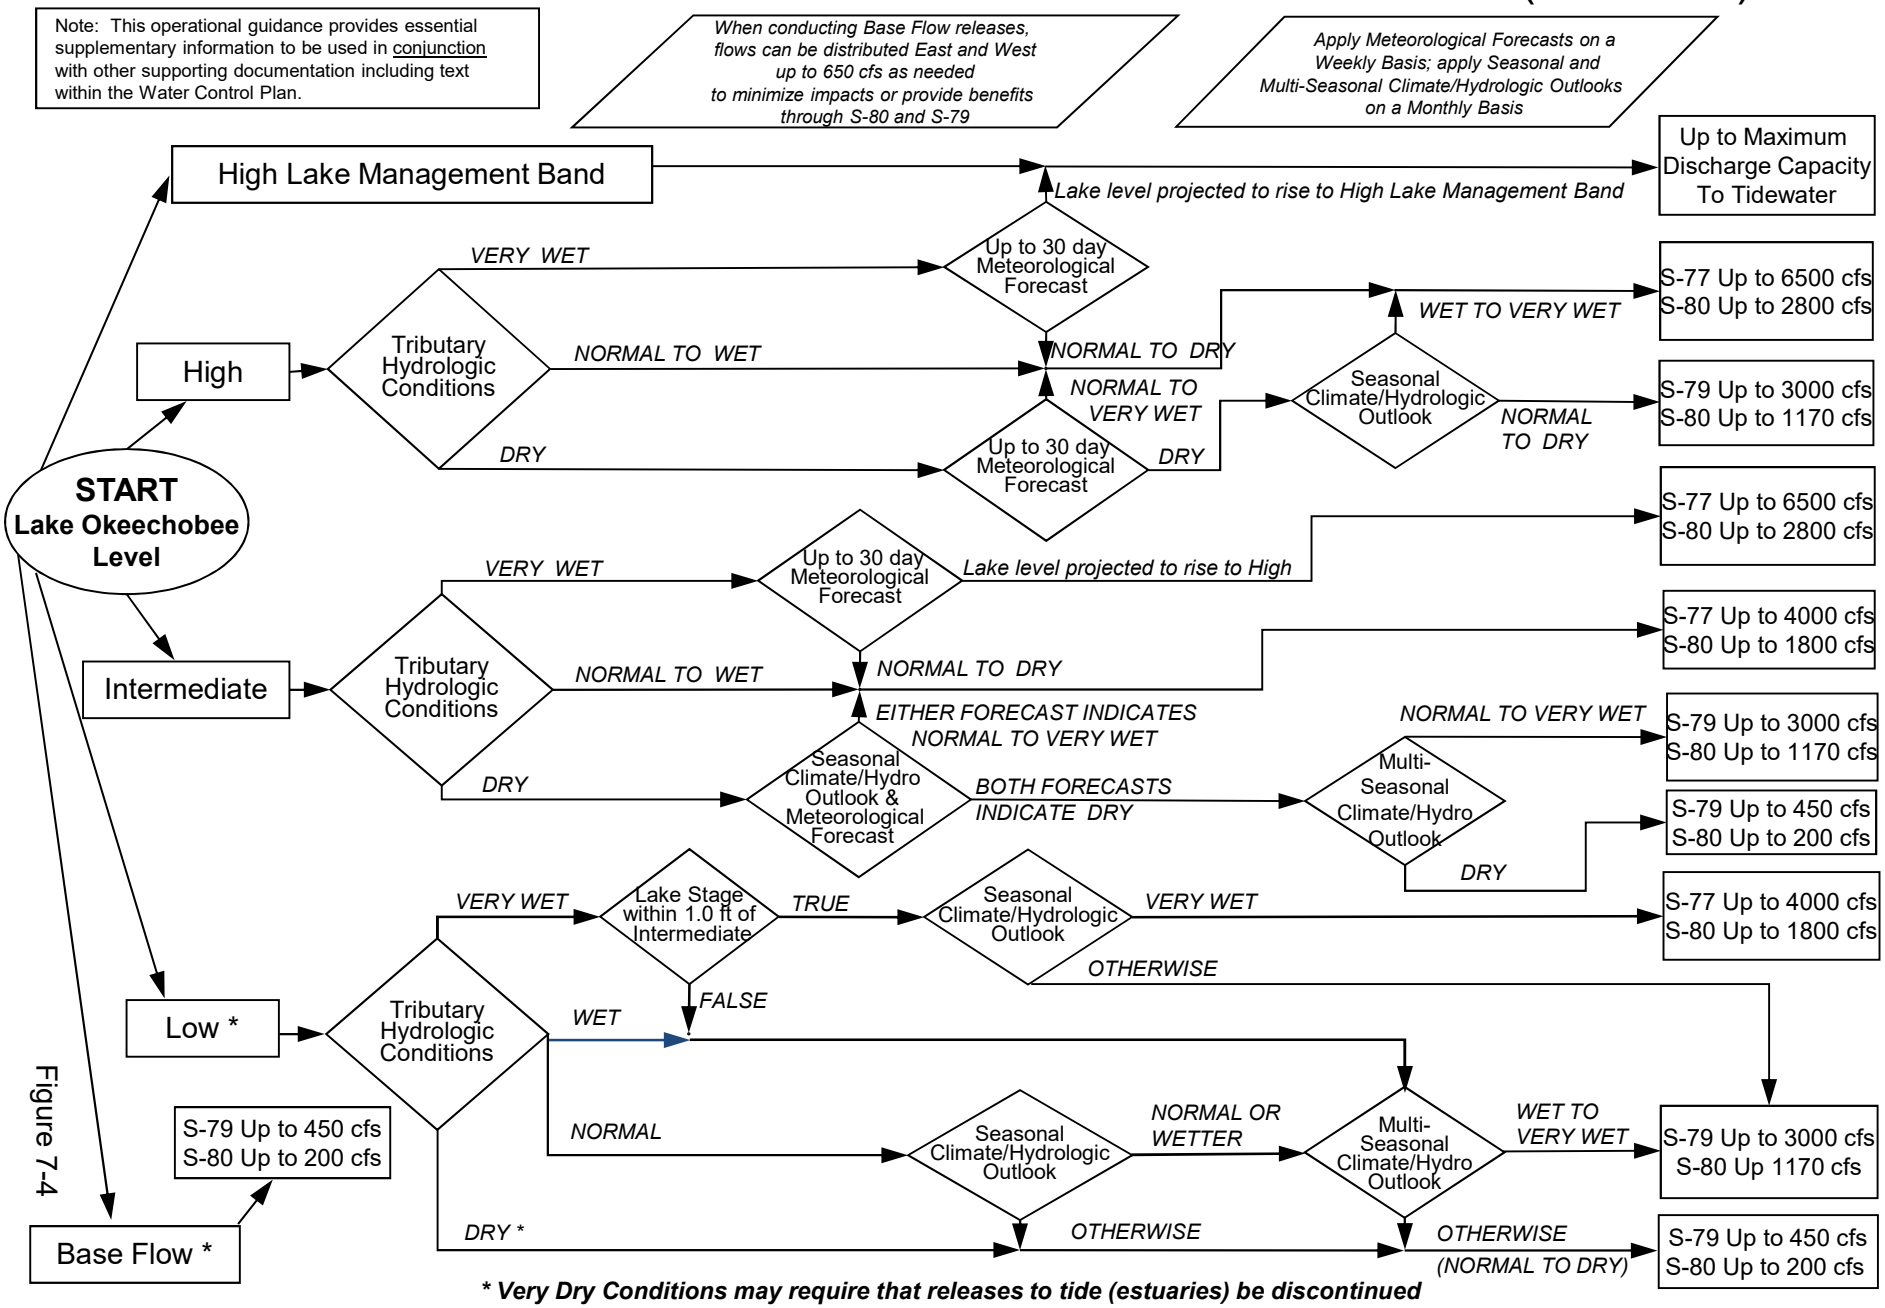

Figure 7-4

Flowchart to Guide Recommendations for Lake Okeechobee Releases to the Caloosahatchee Estuary for 2008 LORS Baseflow & for Environmental Water Supply (revised 9-Aug-2012)

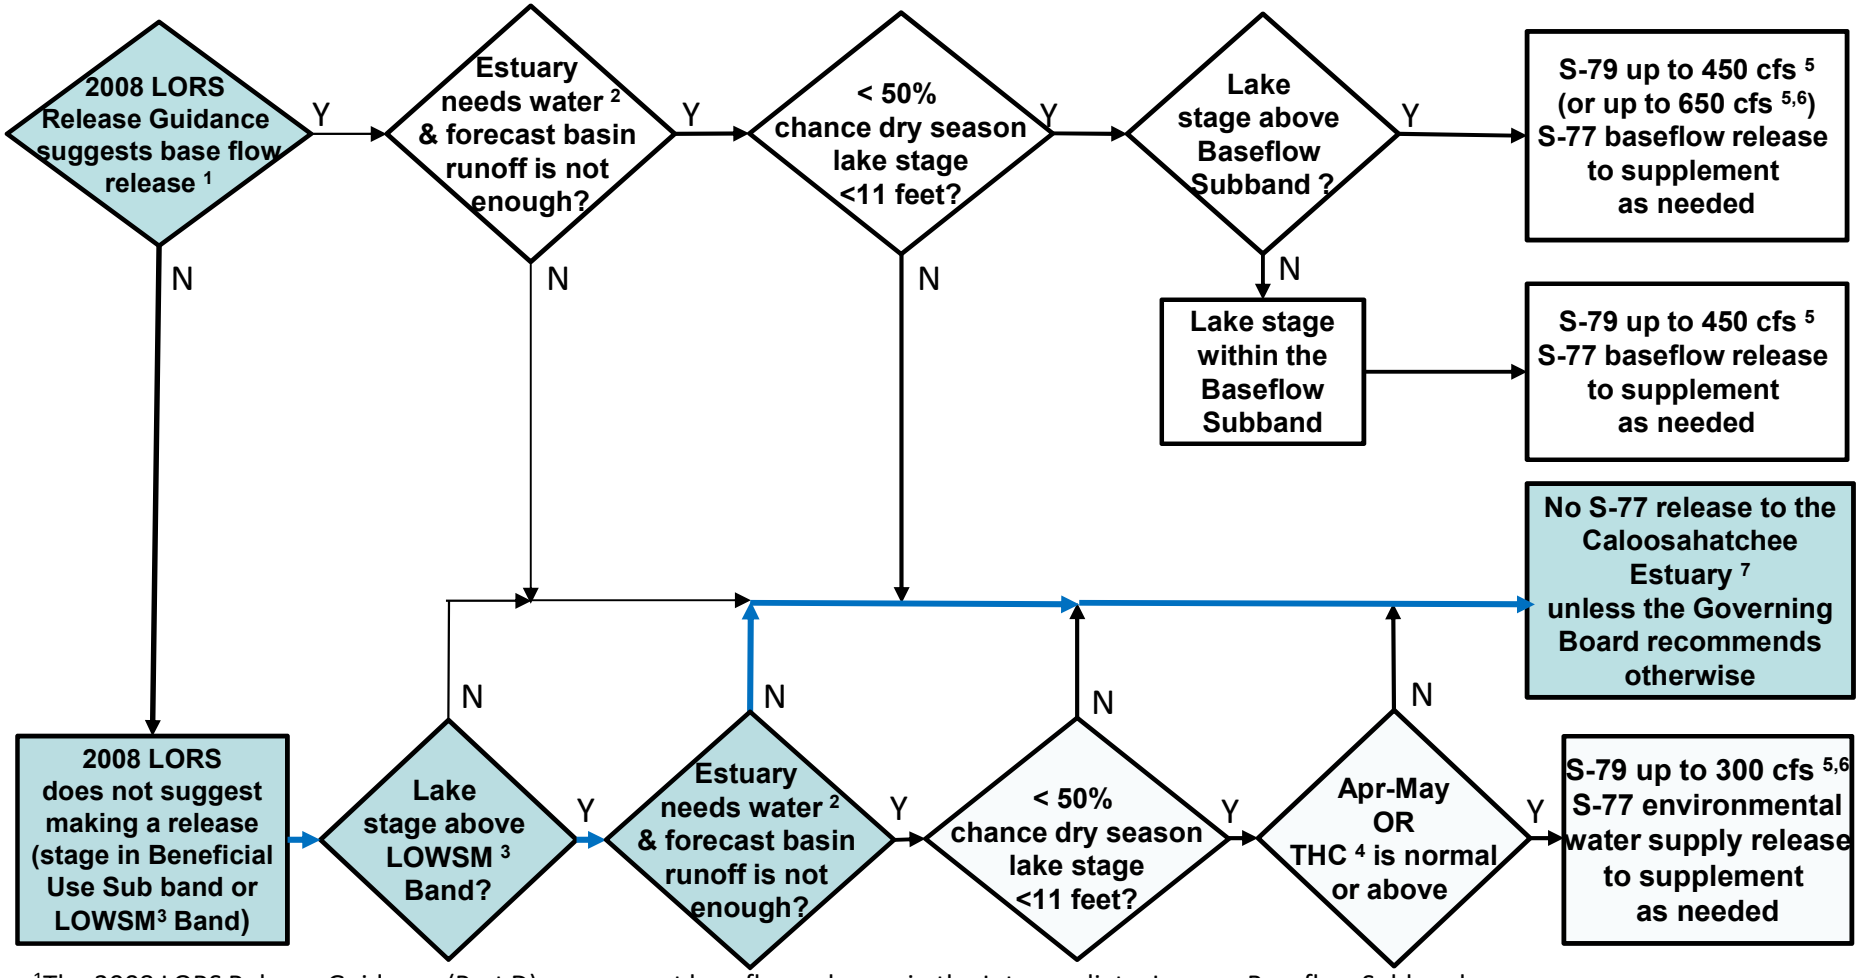

[1]The 2008 LORS Release Guidance (Part D) can suggest baseflow releases in the Intermediate, Low, or Baseflow Subbands.

[2]Estuary "needs" water when the 30-day moving average salinity at I-75 bridge is projected to exceed 5 practical salinity units (psu) within 2 weeks.

[3]LOWSM = Lake Okeechobee Water Shortage Management.

[4]Tributary Hydrologic Condition (THC) is based on classification of Lake Okeechobee Net Inflow and Palmer Index.

[5]Can release less than the "up to" limit if lower release is sufficient to reach or sustain desired estuary salinity; cfs = cubic feet per second.

[6]After reviewing conditions in Water Conservation Areas (WCAs), Stormwater Treatment Areas (STAs), ENP, St. Lucie Estuary and Lake Okeechobee.

[7]Should this condition be reached, the Governing Board will be briefed at their next regularly scheduled meeting as part of the State of the Water Resources agenda item.

Lake Okeechobee Water Level History and Projected Stages

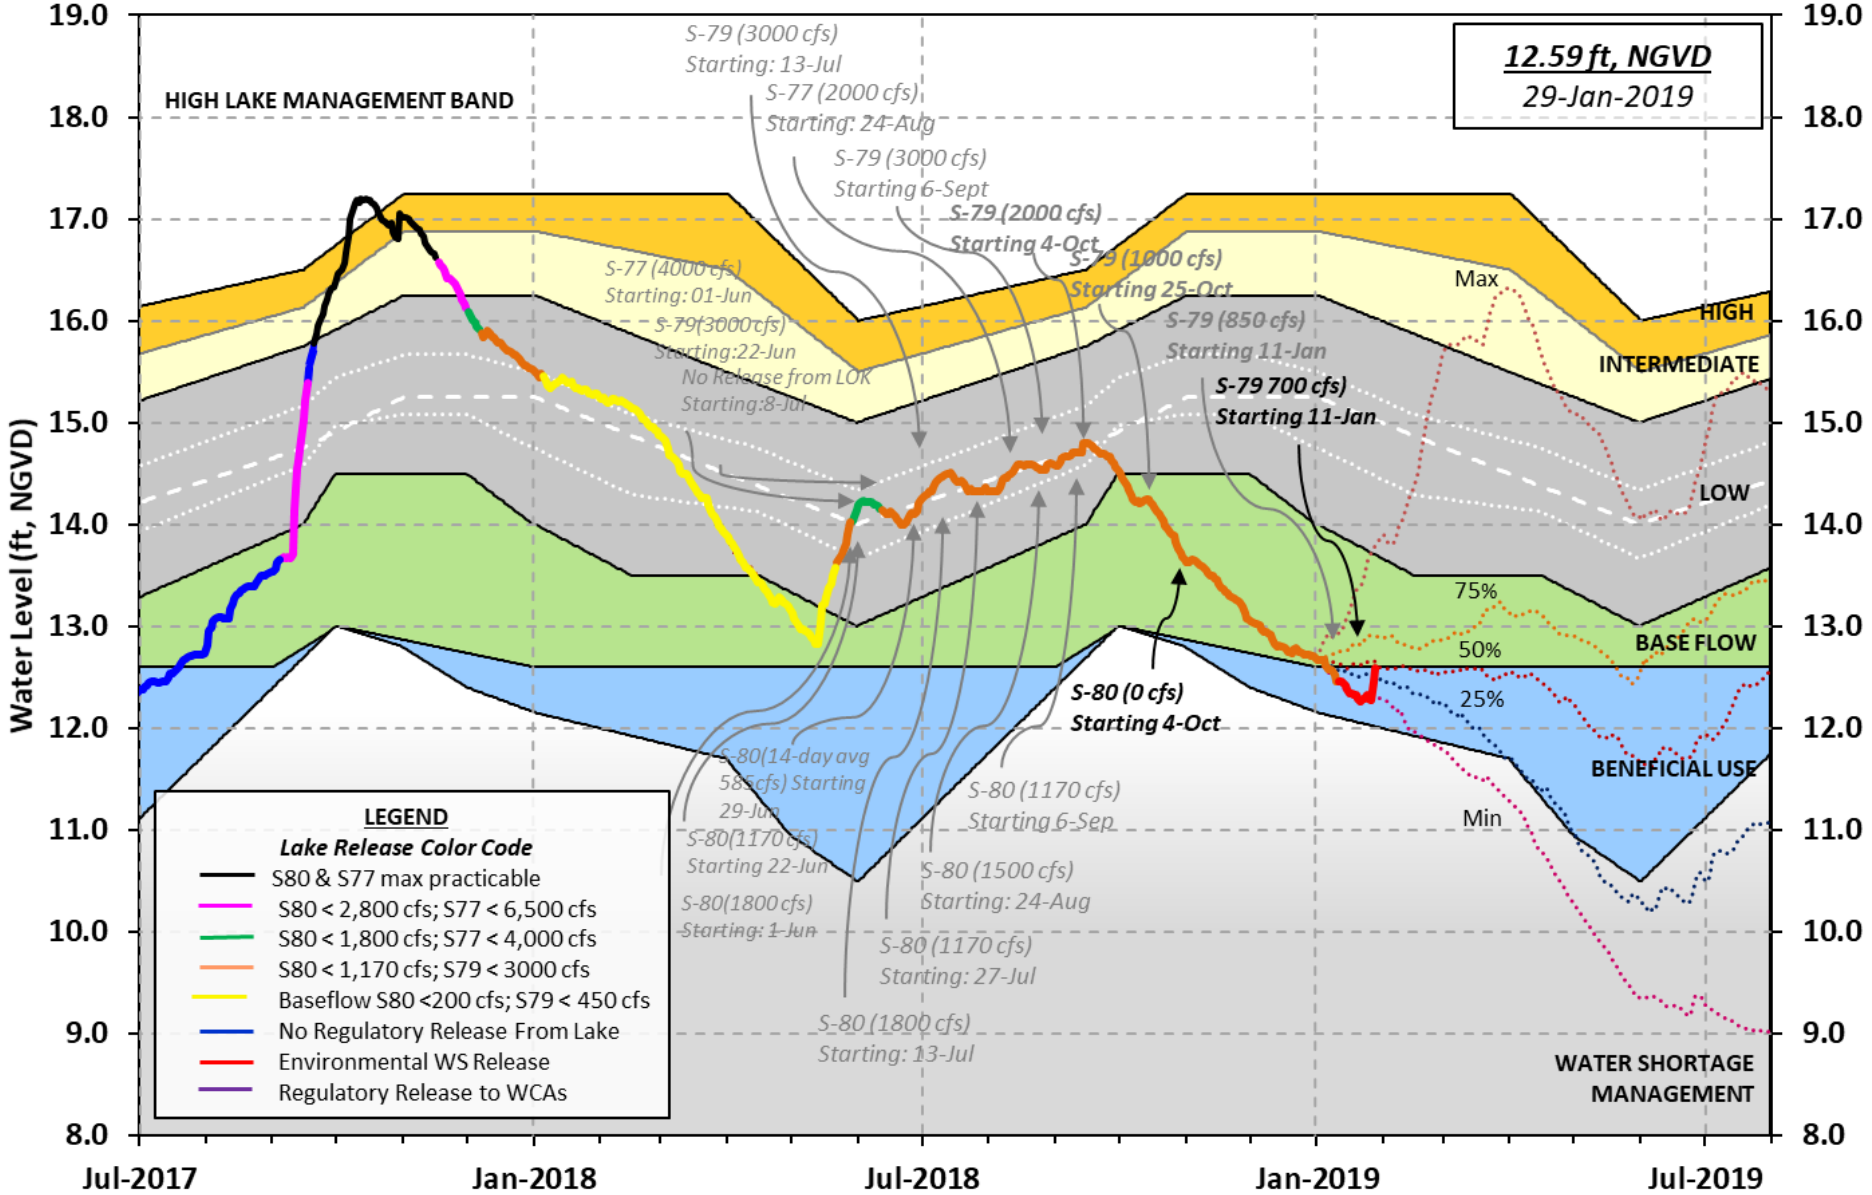

LORS-2008
Adopted by USACE 28-April-2008

Projected Stage Percentiles From
SFWMD-HESM Position Analysis

U. S. Army Corps of Engineers, Jacksonville District
Lake Okeechobee and Vicinity Report
** Preliminary Data - Subject to Revision **

Data Ending 2400 hours 27 JAN 2019

Okeechobee Lake Regulation	Elevation (ft-NGVD)	Last Year (ft-NGVD)	2YRS Ago (ft-NGVD)	
*Okeechobee Lake Elevation	12.45	15.27	13.90	(Official Elv)

Bottom of High Lake Mngmt= 17.25 Top of Water Short Mngmt= 12.02
Currently in Operational Management Band

Simulated Average LORS2008 [1965-2000] -NR-
Difference from Average LORS2008 -NR-

27JAN (1965-2007) Period of Record Average 14.69
Difference from POR Average -2.24

Today Lake Okeechobee elevation is determined from the 4 Int & 4 Edge stations

++Navigation Depth (Based on 2007 Channel Condition Survey) Route 1 ÷ 6.39'
++Navigation Depth (Based on 2008 Channel Condition Survey) Route 2 ÷ 4.59'
Bridge Clearance = 50.23'

---

4 Interior and 4 Edge Okeechobee Lake Average (Avg-Daily values):

L001	L005	L006	LZ40	S4	S352	S308	S133
12.16	12.46	12.70	12.50	12.84	-NR-	12.47	12.02

*Combination Okeechobee Avg-Daily Lake Average = 12.45 (*See Note)

Okeechobee Inflows (cfs):

S65E	1287	S65EX1	0	Fisheating Cr	9
S154	0	S191	0	S135 Pumps	0
S84	0	S133 Pumps	0	S2 Pumps	0
S84X	89	S127 Pumps	0	S3 Pumps	0
S71	476	S129 Pumps	128	S4 Pumps	0
S72	0	S131 Pumps	17	C5	0

Total Inflows: 2006

Okeechobee Outflows (cfs):

S135 Culverts	0	S354	0	S77	1
S127 Culverts	0	S351	0	S308	-283
S129 Culverts	1	S352	0		
S131 Culverts	5	L8 Canal Pt	-146		

Total Outflows: -423

****S77 structure flow is being used to compute Total Outflow.
****S308 structure flow is being used to compute Total Outflow.

Okeechobee Pan Evaporation (inches):

S77	0.00	S308	0.00

Average Pan Evap x 0.75 Pan Coefficient = 0.00" = 0.00'

Lake Average Precipitation using NEXRAD: = 1.71" = 0.14'

Evaporation - Precipitation: = -1.71" = -0.14'
Evaporation - Precipitation using Lake Area of 730 square miles
is equal to 33565 cfs into the lake.
Lake Okeechobee (Change in Storage) Flow is 34888 cfs or 69200 AC-FT

	Headwater Elevation (ft-msl)	Tailwater Elevation (ft-msl)	Disch (cfs)	Gate Positions #1 (ft)	#2 (ft)	#3 (ft)	#4 (ft)	#5 (ft)	#6 (ft)	#7 (ft)	#8 (ft)
			(I) see note at bottom								
North East Shore											
S133 Pumps:	13.10	11.43	0	0	0	0	0	0	(cfs)		
S193:											
S191:	18.85	11.57	0	0.0	0.0	0.0					
S135 Pumps:	12.72	11.98	0	0	0	0	0		(cfs)		
S135 Culverts:			0	0.0	0.0						
North West Shore											
S65E:	20.73	11.14	1287	0.3	0.3	0.3	0.4	0.0	0.0		
S65EX1:	20.73	11.14	0								
S127 Pumps:	13.06	11.62	0	0	0	0	0	0	(cfs)		
S127 Culvert:			0	0.0							
S129 Pumps:	12.73	13.93	128	12	25	97			(cfs)		
S129 Culvert:			1	0.0							
S131 Pumps:	13.01	11.89	17	0	0				(cfs)		
S131 Culvert:			5								
Fisheating Creek											
nr Palmdale		28.81	9								
nr Lakeport											
C5:		-NR-	0	-NR-	-NR-	-NR-					
South Shore											
S4 Pumps:	13.41	13.32	0	0	0	0			(cfs)		
S169:	13.46	13.46	-85	5.0	5.0	5.0					
S310:	13.21		-200								
S3 Pumps:	11.00	13.96	0	0	0	0			(cfs)		
S354:	13.96	11.00	0	0.0	0.0						
S2 Pumps:	12.02	-NR-	0	0	0	0	0		(cfs)		
S351:	-NR-	12.02	0	0.0	0.0	0.0					
S352:		11.38	0	0.0	0.0						
C10A:	-NR-	13.45		8.0	8.0	8.0	0.0	0.0			
L8 Canal PT		13.27	-146								
S351 and S352 Temporary Pumps/S354 Spillway											
S351:	12.02	-NR-	0	-NR--NR--NR--NR--NR--NR--NR-							
S352:	11.38		0	-NR--NR--NR--NR-							
S354:	11.00	13.96	0	-NR--NR--NR--NR-							
Caloosahatchee River (S77, S78, S79)											
S47B:	13.03	12.32		3.0	3.5						
S47D:	11.56	11.50	90	6.5							

```
  S77:
    Spillway and Sector Preferred Flow:
               12.78     11.35       0  0.0  0.0  0.0  0.0
    Flow Due to Lockages+:           1

  S78:
    Spillway and Sector Flow:
               11.20      3.23    1797    0.5  2.5  2.5  2.5
    Flow Due to Lockages+:           9

  S79:
    Spillway and Sector Flow:
                3.20      0.84    4151    2.0  2.0  2.0  3.0  3.0  3.0  2.0  2.0
    Flow Due to Lockages+:           4
    Percent of flow from S77         0%
    Chloride             (ppm)     59


St. Lucie Canal (S308, S80)
  S308:
    Spillway and Sector Preferred Flow:
               12.74     13.27    -283  0.0  0.0  0.0  0.0
    Flow Due to Lockages+:           0

  S153:        18.73     13.06      79    0.0  0.0
  S80:
    Spillway and Sector Flow:
               13.39      0.78       0    0.0  0.0  0.0  0.0  0.0  0.0  0.0
    Flow Due to Lockages+:          10
    Percent of flow from S308   NA  %

  Steele Point Top Salinity    (mg/ml) ****
  Steele Point Bottom Salinity (mg/ml) ****

  Speedy Point Top Salinity    (mg/ml) ****
  Speedy Point Bottom Salinity (mg/ml) ****

 + Flow Due to lockages is computed utilizing average daily headwater and
   tailwater along with total number of lockages for the day to calculate
   a volume which is then converted to an average discharge in cfs.
++ Preferred flow is determined from either the spillway discharge or the below flow meter daily
```

Daily Precipitation Totals	1-Day (inches)	3-Day (inches)	7-Day (inches)	----- Wind ---- Direction (Degø)	Speed (mph)
S133 Pump Station:	-NR-	0.00	0.00		
S193:	-NR-	0.00	0.00	-NR-	-NR-
Okeechobee Field Station:	-NR-	0.00	0.00		
S135 Pump Station:	-NR-	0.00	0.00		
S127 Pump Station:	-NR-	0.00	0.00		
S129 Pump Station:	-NR-	0.00	0.00		
S131 Pump Station:	-NR-	0.00	0.00		
S77:	0.00	0.00	0.00	341	13
S78:	5.78	7.27	7.91	355	7
S79:	6.88	8.97	9.60	354	4
S4 Pump Station:	-NR-	0.00	0.00		
Clewiston Field Station:	-NR-	0.00	0.00		
S3 Pump Station:	-NR-	0.00	0.00		
S2 Pump Station:	-NR-	0.00	0.00		
S308:	2.92	3.43	3.57	338	32
S80:	4.02	4.94	5.19	3	12
Okeechobee Average	1.46	0.26	0.27		

(Sites S78, S79 and S80 not included)

Oke Nexrad Basin Avg	1.71	3.15	3.81

Okeechobee Lake Elevations			27 JAN 2019	12.45	Difference from 27JAN19
27JAN19	-1 Day =	26 JAN 2019	12.27	-0.18	
27JAN19	-2 Days =	25 JAN 2019	12.29	-0.16	
27JAN19	-3 Days =	24 JAN 2019	12.32	-0.13	
27JAN19	-4 Days =	23 JAN 2019	12.29	-0.16	
27JAN19	-5 Days =	22 JAN 2019	12.29	-0.16	
27JAN19	-6 Days =	21 JAN 2019	12.26	-0.19	
27JAN19	-7 Days =	20 JAN 2019	12.28	-0.17	
27JAN19	-30 Days =	28 DEC 2018	12.72	0.27	
27JAN19	-1 Year =	27 JAN 2018	15.27	2.82	
27JAN19	-2 Year =	27 JAN 2017	13.90	1.45	

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = 1.98

Lake Okeechobee Net Inflow (LONIN)

			Average Flow over the previous 14 days		Avg-Daily Flow
27JAN19	Today =	27 JAN 2019	1089	MON	34888
27JAN19	-1 Day =	26 JAN 2019	-1699	SUN	-3910
27JAN19	-2 Days =	25 JAN 2019	-1514	SAT	-5744
27JAN19	-3 Days =	24 JAN 2019	-868	FRI	6122
27JAN19	-4 Days =	23 JAN 2019	-2052	THU	635
27JAN19	-5 Days =	22 JAN 2019	-2785	WED	-NR-
27JAN19	-6 Days =	21 JAN 2019	-2587	TUE	-2792
27JAN19	-7 Days =	20 JAN 2019	-2334	MON	-6221
27JAN19	-8 Days =	19 JAN 2019	-2068	SUN	632
27JAN19	-9 Days =	18 JAN 2019	-2801	SAT	463
27JAN19	-10 Days =	17 JAN 2019	-2385	FRI	2517
27JAN19	-11 Days =	16 JAN 2019	-2582	THU	-3306
27JAN19	-12 Days =	15 JAN 2019	-2350	WED	-7468
27JAN19	-13 Days =	14 JAN 2019	-1974	TUE	-1658

S65E

			Average Flow over previous 14 days		Avg-Daily Flow
27JAN19	Today=	27 JAN 2019	541	MON	1473
27JAN19	-1 Day =	26 JAN 2019	469	SUN	777
27JAN19	-2 Days =	25 JAN 2019	434	SAT	616
27JAN19	-3 Days =	24 JAN 2019	410	FRI	785
27JAN19	-4 Days =	23 JAN 2019	379	THU	517
27JAN19	-5 Days =	22 JAN 2019	360	WED	509
27JAN19	-6 Days =	21 JAN 2019	343	TUE	312
27JAN19	-7 Days =	20 JAN 2019	345	MON	402
27JAN19	-8 Days =	19 JAN 2019	334	SUN	344
27JAN19	-9 Days =	18 JAN 2019	330	SAT	354
27JAN19	-10 Days =	17 JAN 2019	324	FRI	373
27JAN19	-11 Days =	16 JAN 2019	317	THU	362
27JAN19	-12 Days =	15 JAN 2019	310	WED	394
27JAN19	-13 Days =	14 JAN 2019	297	TUE	358

S65EX1

			Average Flow over previous 14 days		Avg-Daily Flow
27JAN19	Today=	27 JAN 2019	0	MON	0
27JAN19	-1 Day =	26 JAN 2019	0	SUN	0
27JAN19	-2 Days =	25 JAN 2019	0	SAT	0

27JAN19	-3 Days =	24 JAN 2019	0	FRI	|	0
27JAN19	-4 Days =	23 JAN 2019	2	THU	|	0
27JAN19	-5 Days =	22 JAN 2019	2	WED	|	0
27JAN19	-6 Days =	21 JAN 2019	2	TUE	|	0
27JAN19	-7 Days =	20 JAN 2019	2	MON	|	0
27JAN19	-8 Days =	19 JAN 2019	2	SUN	|	0
27JAN19	-9 Days =	18 JAN 2019	2	SAT	|	0
27JAN19	-10 Days =	17 JAN 2019	2	FRI	|	0
27JAN19	-11 Days =	16 JAN 2019	2	THU	|	0
27JAN19	-12 Days =	15 JAN 2019	2	WED	|	0
27JAN19	-13 Days =	14 JAN 2019	2	TUE	|	0

Lake Okeechobee Outlets Last 14 Days

DATE	S-77 Discharge (ALL DAY) (AC-FT)	Below S-77 Discharge (ALL-DAY) (AC-FT)	S-78 Discharge (ALL DAY) (AC-FT)	S-79 Discharge (ALL DAY) (AC-FT)
27 JAN 2019	2	327	3588	8368
26 JAN 2019	3	207	817	1671
25 JAN 2019	111	203	694	1535
24 JAN 2019	477	488	895	1059
23 JAN 2019	1161	856	906	1336
22 JAN 2019	1233	1118	913	1687
21 JAN 2019	1212	986	900	2069
20 JAN 2019	1186	1001	1219	2422
19 JAN 2019	2128	1914	1528	1624
18 JAN 2019	1634	1459	902	848
17 JAN 2019	1621	1464	893	857
16 JAN 2019	1661	1382	901	980
15 JAN 2019	1536	1264	905	1395
14 JAN 2019	1753	1546	1083	1934

DATE	S-310 Discharge (ALL DAY) (AC-FT)	S-351 Discharge (ALL DAY) (AC-FT)	S-352 Discharge (ALL DAY) (AC-FT)	S-354 Discharge (ALL DAY) (AC-FT)	L8 Canal Pt Discharge (ALL DAY) (AC-FT)
27 JAN 2019	-396	0	-NR-	0	-290
26 JAN 2019	-91	0	-NR-	0	44
25 JAN 2019	-6	0	-NR-	0	-22
24 JAN 2019	-103	0	-NR-	0	13
23 JAN 2019	-126	0	-NR-	0	-4
22 JAN 2019	-100	0	-NR-	0	-NR-
21 JAN 2019	143	0	-NR-	0	63
20 JAN 2019	78	380	-NR-	131	275
19 JAN 2019	47	1255	-NR-	506	58
18 JAN 2019	309	1194	-NR-	599	143
17 JAN 2019	165	1553	-NR-	502	147
16 JAN 2019	392	1470	-NR-	393	167
15 JAN 2019	349	1186	-NR-	359	224
14 JAN 2019	288	1126	-NR-	399	159

DATE	S-308 Discharge (ALL DAY) (AC-FT)	Below S-308 Discharge (ALL-DAY) (AC-FT)	S-80 Discharge (ALL-DAY) (AC-FT)
27 JAN 2019	-561	-546	20
26 JAN 2019	-506	-34	30
25 JAN 2019	-415	47	31
24 JAN 2019	52	242	17
23 JAN 2019	149	618	29
22 JAN 2019	-0	200	16

21 JAN 2019	-1	85	21
20 JAN 2019	571	896	10
19 JAN 2019	-51	342	26
18 JAN 2019	-199	171	20
17 JAN 2019	-20	364	32
16 JAN 2019	-130	501	35
15 JAN 2019	-161	281	36
14 JAN 2019	-249	-112	27

*** NOTE: Discharge (ALL DAY) is computed using Spillway, Sector Gate and Lockages Discharges from 0015 hrs to 2400 hrs.

(I) - Flows preceeded by "I" signify an instantaneous flow computed from the single value reported for the day

---

* On 11 May 1999, Lake Okeechobee Elevation was switched from Instantaneous 2400 value to an average-daily lake average.
On 14 Mar 2001, due to the isolation of various gages within the standard 10 stations, the average of the interior 4 station gages was used as the Lake Okeechobee Elevation.
On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage mix of interior and edge gages to obtain a more reliable representation of the lake level.
On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage mix of interior and edge gages to obtain a more reliable representation of the lake level due to isolation of S135 from low lake levels.
Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations
++ For more information see the Jacksonville District Navigation website at http://www.saj.usace.army.mil/
$ For information regarding Lake Okeechobee Service Area water restrictions please refer to www.sfwmd.gov

---

Report Generated 28JAN2019 @ 23:38 ** Preliminary Data - Subject to Revision **

Lake Okeechobee

28JAN19 15:45:23

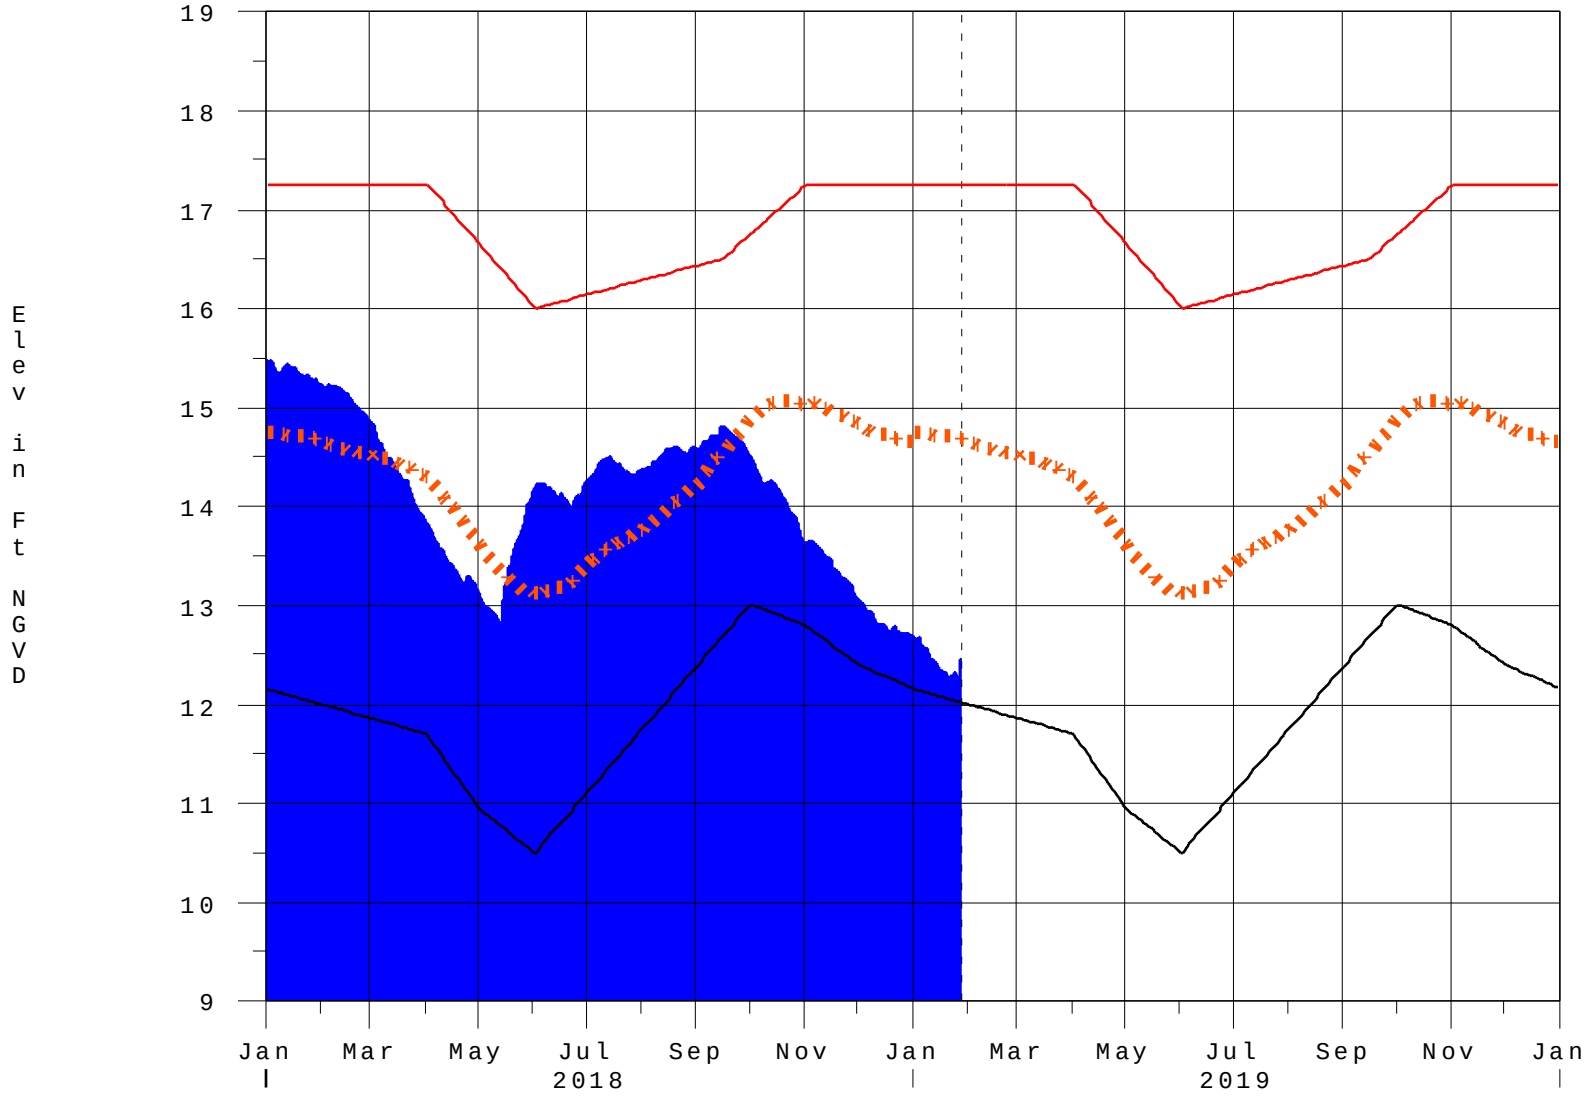

Classification Tables

Supplemental Tables used in conjunction with the LORS2008 Release

Guidance Flow Charts

- Class Limits for Tributary Hydrologic Conditions

Table K-2 in the Lake Okeechobee Water Control Plan

- 6-15 Day Precipitation Outlook Categories

Table ?? in the Lake Okeechobee Water Control Plan

- Classification of Lake Okeechobee Net Inflow for Seasonal Outlook

Table K-3 in the Lake Okeechobee Water Control Plan

- Classification of Lake Okeechobee Net Inflow for Multi-Seasonal Outlook

Table K-4 in the Lake Okeechobee Water Control Plan

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage

Tributary Hydrologic Classification*	Palmer Index Class Limits	2-wk Mean L.O. Net Inflow Class Limits
Very Wet	3.0 or greater	Greater >= 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

* use the wettest of the two indicators

Classification of Lake Okeechobee Net Inflow Seasonal Outlook*

Lake Net Inflow Prediction [million acre-feet]	Equivalent Depth** [feet]	Lake Okeechobee Net Inflow Seasonal Outlook
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

****Volume-depth conversion based on average lake surface area of 467,000 acres**

Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook*

Lake Net Inflow Prediction [million acre-feet]	**Equivalent Depth** [feet]**	**Lake Okeechobee Net Inflow Multi-Seasonal Outlook**
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

****Volume-depth conversion based on average lake surface area of 467,000 acres**

6-15 Day Precipitation Outlook Categories*

6-15 Day Precipitation Outlook Categories	WSE Decision Tree Categories
Above Normal	Wet to Very Wet
Normal	Normal
Below Normal	Dry

*** Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan**

Under Construction