Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 10/28/2019 (ENSO Neutral Condition)

Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method¹, the SFWMD empirical method², a sub-sampling of Neutral years³ and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with La Nina ENSO years⁴. The results for Croley's method and the SFWMD empirical method are based on the CPC Outlook.

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season	Croley's Method ^{1*}		- mnirical		Sub-sampling of Neutral ENSO Years ³		Sub-sampling of AMO Warm + Neutral ENSO Years ⁴	
	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition
Current (Oct- Mar)	N/A	N/A	0.63	Dry	0.89	Normal	1.93	Wet
Multi Seasonal (Oct-Apr)	N/A	N/A	0.56	Dry	0.85	Dry	2.03	Dry

^{*}Croley's Method Not Produced for This Report

See <u>Seasonal</u> and <u>Multi-Seasonal</u> tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

**Sub-sampling is a weighted average of ENSO conditions based on the ENSO forecast used.

Tributary Hydrologic Conditions Graph:

628 cfs 14-day running average for Lake Okeechobee Net Inflow through 10/27/2019. According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

-1.27 for Palmer Index on 10/26/2019.

According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

The wetter of the two conditions above is **Normal**.

LORS2008 Classification Tables:

Lake Okeechobee Stage on 10/28/2019

Lake Okeechobee Stage: 13.49 feet

USACE Report for Lake Okeechobee

Lake Okeechobee Stage Hydrograph

Lake Okeechobee Management Zone/Band		Bottom Elevation (feet, NGVD)	Current Lake Stage
High Lake Management Band		17.17	
	High sub-band	16.80	
Operational Band	Intermediate sub-band	16.20	
	Low sub-band	14.50	
Base Flow sub-band		12.89	← 13.49
Beneficial Use sub-band		12.83	
Water Shortage M	lanagement Band		

Part C of LORS2008: Discharge to WCA's

Release Guidance Flow Chart Outcome: No releases to WCAs.

Part D of LORS2008: Discharge to Tidewater

Release Guidance Flow Chart Outcome: S-79 Up to 450 cfs & S-80 Up to 200 cfs.

Adaptive Protocol's Release Guidance: Caloosahatchee Estuary

Release Guidance Flow Chart Outcome: S-79 Up to 450 cfs & S-77 baseflow release to supplement as needed.

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers LORSS Homepage

LORS2008 Implementation on 10/28/2019 (ENSO Neutral Condition):

Status for week ending 10/28/2019:


District wide, Raindar rainfall was 0.76 inches for the week. Lake stage on 10/28/2019 was 13.49 ft, NGVD, down 0.01 ft from last week .The updated October 2019 SFWMM Dynamic Position Analysis percentile graph for Lake Okeechobee show that the current lake stage is in the Base-Flow Sub-Band. The LORS2008 Tributary Hydrologic Conditions (THC) are classified as **Normal**. The PDI indicates Normal conditions and the LONIN is Near Normal. The THC classification is based on the wetter of the two indices.

Water Supply Risk Evaluation

Area	Indicator	Value	Color Coded Scoring Scheme
	Projected LOK Stage for the next two months	Base-Flow Sub-Band	M
	Palmer Index for LOK Tributary Conditions	-1.27 (Dry)	M
	CDC Precipitation Outlook	1 month: Normal	L
LOK	CPC Precipitation Outlook	3 months: Normal	Ш
	LOK Seasonal Net Inflow Outlook ENSO Forecast (positive)	0.89 ft (Dry)	M
	LOK Multi-Seasonal Net Inflow Outlook	0.85 ft (Dry)	Н
	ENSO Forecast (positive)	(Біу)	
	WCA 1: 3 Station Average (Site 1-7, Site 1-8T & Site 1-9)	Above Line 1 (16.70 ft)	L
WCAs	WCA 2A: Site 2-17 HW	Above Line 1 (13.01 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64, and 65)	Above Line 1 (10.02 ft)	L
	Service Area 1	Year-Round Irrigation Rule in effect	L
LEC	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L


Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow outlooks use slightly different classification intervals than those used by the 2008-LORS.

Lake Okeechobee SFWMM Oct 2019 Position Analysis

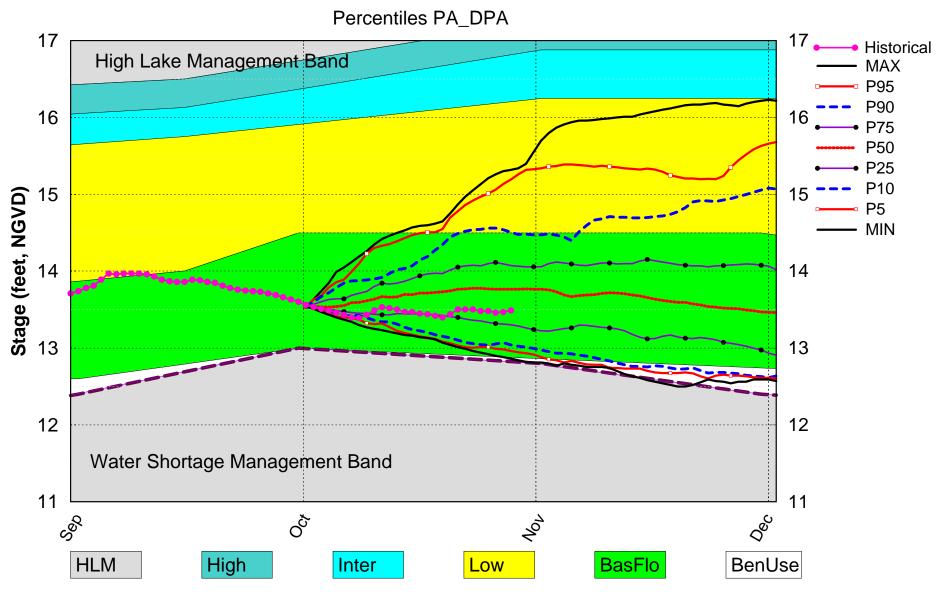

(See assumptions on the Position Analysis Results website)

Tributary Basin Condition Indicators as of October 28 2019

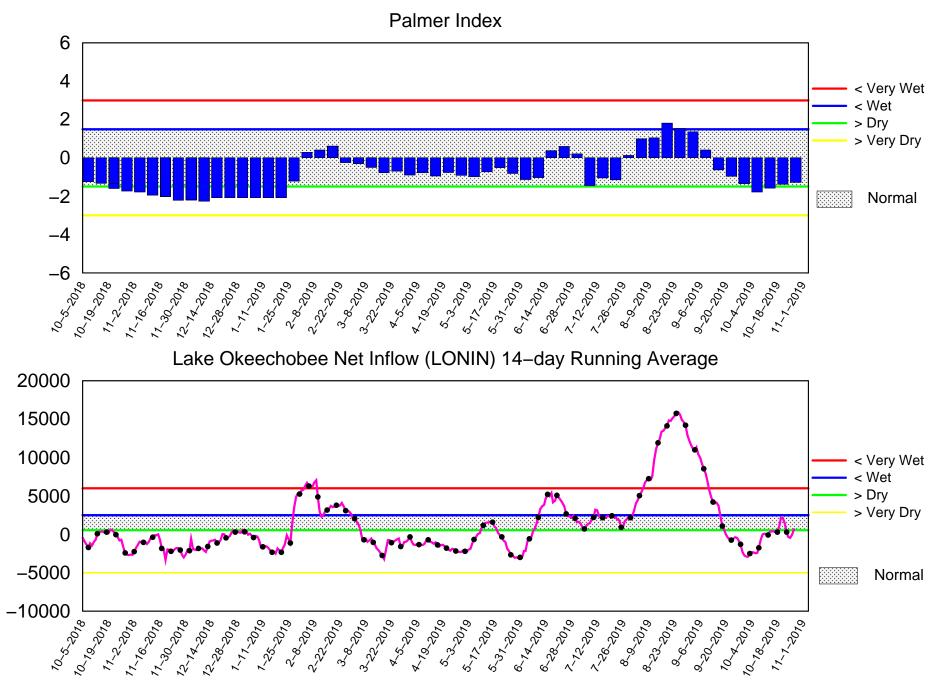


Flow (cfs)

Mon Oct 28 15:46:47 EDT 2019


2008 LORS

Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

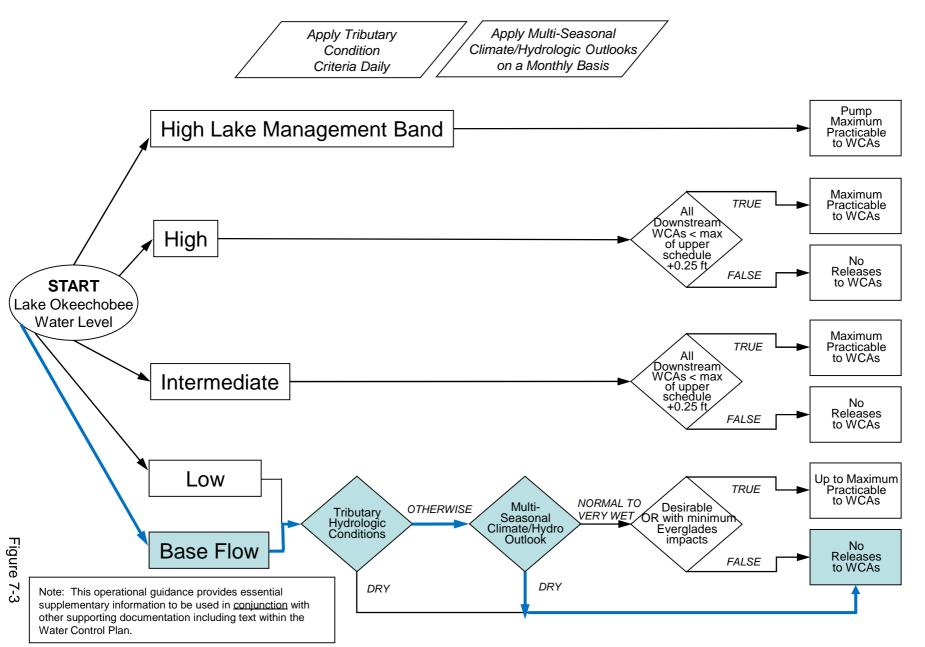


2008 LORS

Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

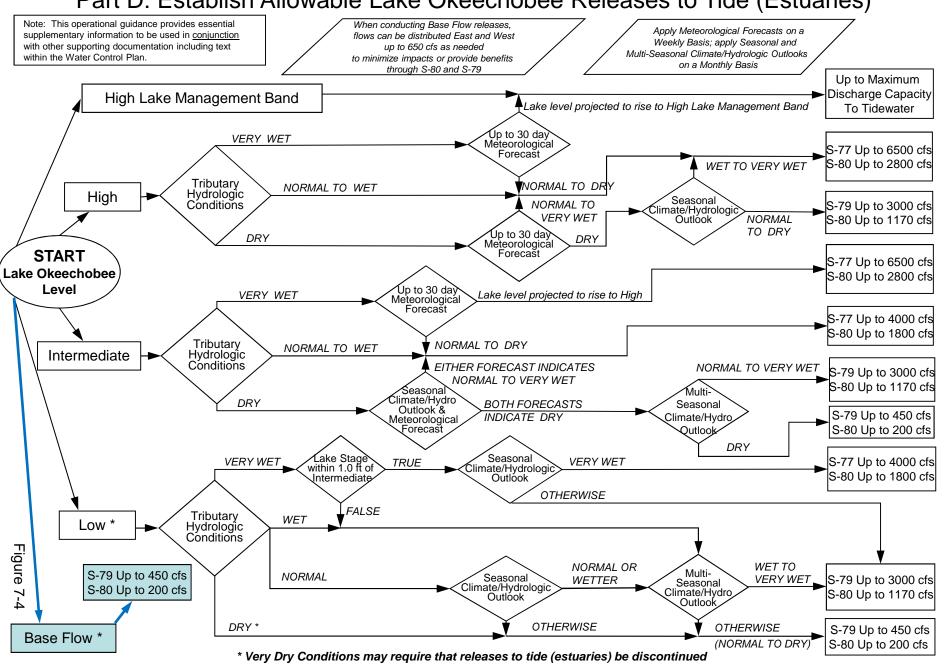

Flowchart to Guide Recommendations for Lake Okeechobee Releases to the Caloosahatchee Estuary for 2008 LORS Baseflow & for Environmental Water Supply (revised 9-Aug-2012)

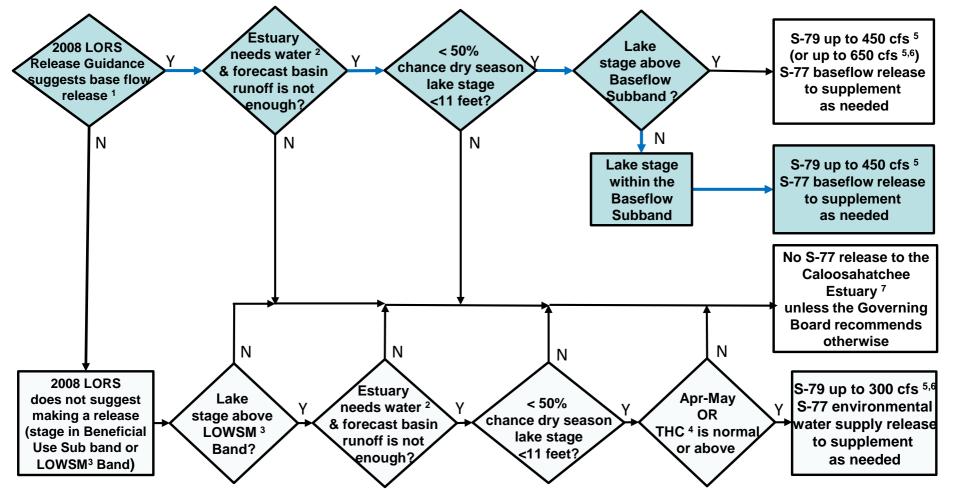

¹The 2008 LORS Release Guidance (Part D) can suggest baseflow releases in the Intermediate, Low, or Baseflow Subbands.

²Estuary "needs" water when the 30-day moving average salinity at I-75 bridge is projected to exceed 5 practical salinity units (psu) within 2 weeks.

³LOWSM = Lake Okeechobee Water Shortage Management.


⁴Tributary Hydrologic Condition (THC) is based on classification of Lake Okeechobee Net Inflow and Palmer Index.

⁵Can release less than the "up to" limit if lower release is sufficient to reach or sustain desired estuary salinity; cfs = cubic feet per second.

⁶After reviewing conditions in Water Conservation Areas (WCAs), Stormwater Treatment Areas (STAs), ENP, St. Lucie Estuary and Lake Okeechobee.

⁷Should this condition be reached, the Governing Board will be briefed at their next regularly scheduled meeting as part of the State of the Water Resources agenda item.

Lake Okeechobee Water Level History and Projected Stages

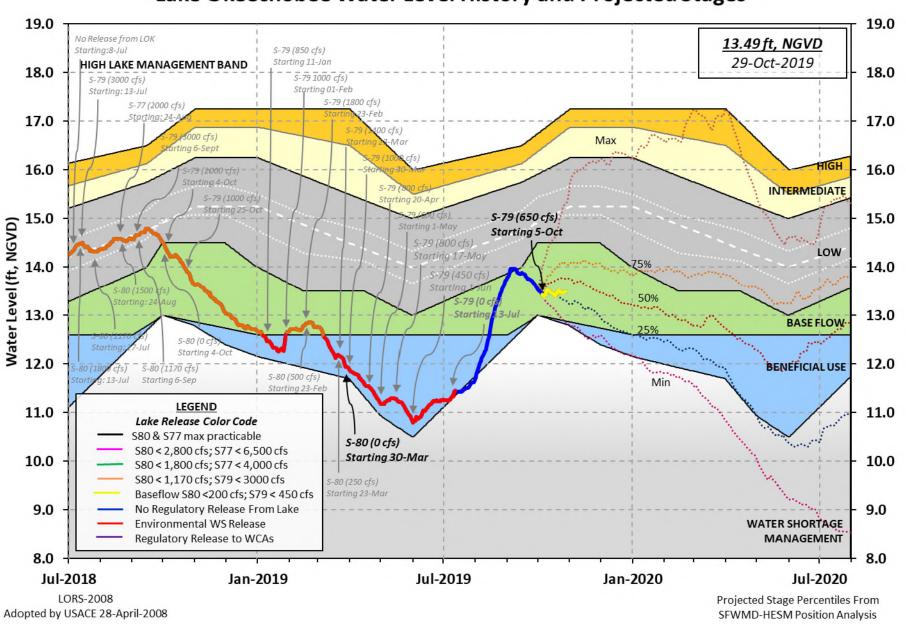

Data Ending 2400 hours 27 OCT 2019

Okeechobee Lake	_	(ft-NGVD) (ft-NGV	D) (ft-NGVD)	
*Okeechobee La Bottom of High Currently in O	Lake Mngmt	= 17.17 Top	of Water Sh		ficial Elv) 83
Simulated Aver- Difference from					
270CT (1965-20 Difference from			rage 15.		
Today Lake Oke stations	echobee ele	vation is det	ermined fro	m the 4 Int &	4 Edge
++Navigation D	epth (Based	on 2007 Chan	nel Conditi	on Survey) Rou	te 1 ÷
++Navigation D		on 2008 Chan	nel Conditi	on Survey) Rou	te 2 ÷
Bridge Clearan	ce = 49.56' 				
_					
4 Interior and 4	Edge Okeec	hobee Lake Av	erage (Avg-1	Daily values):	
L001 L005 13.51 13.53	L006 LZ40 13.47 13.4			S133 13.50	
*Combination Ok	eechobee A	vg-Daily Lake	_	13.49 (*See Note)	
_					
Okeechobee Inflo	ws (cfs):				
S65E		S65EX1	101	Fisheating Cr	
S154		S191	0	S135 Pumps	0
S84		S133 Pumps	0	S2 Pumps	0
S84X		S127 Pumps	0	S3 Pumps	0
S71		S129 Pumps	0	S4 Pumps	0
S72 Total Inflows:	0 696	S131 Pumps	0	C5	0
Okeechobee Outfl	owa (afa):				
S135 Culverts		S354	0	S77	67
S133 Culverts		S351	0	S308	-569
S127 Culverts		S352	0	5300	509
S131 Culverts		L8 Canal Pt	-123		
Total Outflows:	-625		123		

****S77 structure flow is being used to compute Total Outflow.
****S308 structure flow is being used to compute Total Outflow.
Okoogheboo Dan Evaporation (inches):

Okeechobee Pan Evaporation (inches):

S77 0.29 S308 0.46

Average Pan Evap x 0.75 Pan Coefficient = 0.28" = 0.02'

Lake Average Precipitation using NEXRAD: = 0.04" = 0.00'

Evaporation - Precipitation: = 0.24" = 0.02'

Evaporation - Precipitation using Lake Area of 730 square miles

is equal to 4735 cfs out of the lake.

Lake Okeechobee (Change in Storage) Flow is 4134 cfs or 8200 AC-FT

_

_

Не	eadwater	Tailwater				Gat	e Pos	sition	ns	
	levation	Elevation	Disch	#1	#2	#3	#4	#5	#6 #7	
#8	ft-msl)	(ft-msl)	(cfs)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft) (ft)	
(ft)										
77 - 1 1 - G1-		(I) see n	ote at	bott	com				
North East Shor		12 51	0	0	0	0	0	0	, ,	
S133 Pumps: S193:		13.51	0	0	0	0	0	0	(cfs)	
S191:	16.89	13.52	0	0.0	0.0	0.0				
S135 Pumps:	13.49	13.47	0	0	0	0	0		(cfs)	
S135 Culverts	s:		0	0.0	0.0					
North West Shor										
S65E:	20.87	13.47	395	0.5	0.5	0.0	0.5	-0.0	0.5	
S65EX1:	20.87	13.47	101							
S127 Pumps:		13.47	0	0	0	0	0	0	(cfs)	
S127 Culvert	:		0	0.0						
S129 Pumps:		13.52	0	0	0	0			(cfs)	
S129 Culvert	:		0	0.0						
S131 Pumps:	12.75	13.51	0	0	0				(cfs)	
S131 Culvert	:		0							
Fisheating Cr	reek									
nr Palmdale nr Lakeport		29.52	44							
C5:	<u> </u>	-NR-	0	-NR	NF	RNF	<u>!</u> –			
South Shore										
S4 Pumps:	11.35	13.40	0	0	0	0			(cfs)	
	13.45	11.39	0	0.0	0.0	0.0				
S310:	13.42		-35							

```
      S3 Pumps:
      9.30
      13.51
      0
      0
      0
      0

      S354:
      13.51
      9.30
      0
      0.0
      0.0

      S2 Pumps:
      9.79
      -NR-
      0
      0
      0
      0

      S351:
      -NR-
      9.79
      0
      0.0
      0.0
      0.0

      S352:
      13.60
      9.63
      0
      0.0
      0.0

      C10A:
      -NR-
      13.69
      8.0
      8.0
      8.0

                                                                      (cfs)
                                                0 0 0 0
                                                                             (cfs)
                                               8.0 8.0 8.0 0.0 0.0
                           13.50 -123
  L8 Canal PT
                     S351 and S352 Temporary Pumps/S354 Spillway
                           -NR- 0 -NR--NR--NR--NR--NR-
13.60 0 -NR--NR--NR-
13.51 0 -NR--NR--NR-
  S351:
                 9.79
  S352:
                 9.63
  S354:
                 9.30
Caloosahatchee River (S77, S78, S79)
  S47B:
          13.14 11.32
                                                1.0 1.5
  S47D:
                11.13
                           11.12
                                        46 6.0
  S77:
    Spillway and Sector Preferred Flow:
                13.30 11.00 64 0.0 0.0 0.0 0.0
                                         3
    Flow Due to Lockages+:
  S78:
    Spillway and Sector Flow:
                11.01 2.90 350 0.0 0.0 0.0 1.0
                                          8
    Flow Due to Lockages+:
  S79:
    Spillway and Sector Flow:
                3.06 1.73 936 0.0 1.0 1.0 1.0 1.0 0.0
0.0
                                          5
    Flow Due to Lockages+:
    Percent of flow from S77
                                          7%
                  (ppm)
    Chloride
St. Lucie Canal (S308, S80)
  S308:
    Spillway and Sector Preferred Flow:
                13.44 13.94 -568 0.0 0.0 0.0 0.0
    Flow Due to Lockages+:
                                         -1
          18.74 13.76 0 0.0 0.0
  S153:
  S80:
    Spillway and Sector Flow:
    14.00 1.81 0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 Flow Due to Lockages+: 15
    Percent of flow from S308 NA %
  Steele Point Top Salinity (mg/ml) ****
  Steele Point Bottom Salinity (mg/ml) ****
  Speedy Point Top Salinity (mg/ml) -N
  Speedy Point Bottom Salinity (mg/ml) -N
```

- + Flow Due to lockages is computed utilizing average daily headwater and tailwater along with total number of lockages for the day to calculate a volume which is then converted to an average discharge in cfs.
- ++ Preferred flow is determined from either the spillway discharge or the below flow meter daily

---- Wind ---Daily Precipitation Totals 1-Day 3-Day 7-Day Direction Speed (inches) (inches) (inches) (Degø) (mph) S133 Pump Station: -NR-0.00 0.00 S193: -NR-0.00 0.00 -NR--NR-Okeechobee Field Station: -NR-0.00 0.00 S135 Pump Station: 0.00 -NR-0.00 0.00 S127 Pump Station: -NR-0.00 S129 Pump Station: -NR-0.00 0.00 S131 Pump Station: -NR-0.00 0.00 S77: 3.41 3.47 3.75 183 S78: 1.42 1.58 1.58 85 1 S79: 1.84 1.84 90 1.82 1 0.00 S4 Pump Station: 0.00 -NR-Clewiston Field Station: -NR-0.00 0.00 0.00 0.00 S3 Pump Station: -NR-S2 Pump Station: -NR-0.00 0.00 S308: 30.20 31.34 31.34 157 2 S80: 6.47 7.79 7.87 178 1 Okeechobee Average 16.81 2.68 2.70 (Sites S78, S79 and S80 not included) Oke Nexrad Basin Avg 0.04 0.48 0.81 ______

_ Okeechobee Lake Elevations	27 OCT 2019	13.49 Difference	from
270CT19			
270CT19 -1 Day =	26 OCT 2019	13.47	-0.02
270CT19 - 2 Days =	25 OCT 2019	13.46	-0.03
270CT19 -3 Days =	24 OCT 2019	13.48	-0.01
270CT19 -4 Days =	23 OCT 2019	13.48	-0.01
270CT19 -5 Days =	22 OCT 2019	13.50	0.01
270CT19 -6 Days =	21 OCT 2019	13.50	0.01
270CT19 -7 Days =	20 OCT 2019	13.50	0.01
270CT19 -30 Days =	27 SEP 2019	13.66	0.17
270CT19 -1 Year =	27 OCT 2018	13.83	0.34
270CT19 -2 Year =	27 OCT 2017	-NR-	-NR-

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = 3.38

270CT19 Today = 270CT19 -1 Day = 270CT19 -2 Days = 270CT19 -3 Days = 270CT19 -4 Days = 270CT19 -5 Days = 270CT19 -6 Days = 270CT19 -7 Days = 270CT19 -8 Days = 270CT19 -9 Days =	27 OCT 2019 712 MON 26 OCT 2019 -10 SUN 25 OCT 2019 -470 SAT 24 OCT 2019 -346 FRI 23 OCT 2019 252 THU 22 OCT 2019 1443 WED 21 OCT 2019 2086 TUE 20 OCT 2019 2101 MON 19 OCT 2019 1042 SUN 18 OCT 2019 255 SAT	4198 2369 -3804 73 -4076 28 46 12435 8469 -3173
270CT19 -10 Days = 270CT19 -11 Days =	17 OCT 2019 276 FRI 16 OCT 2019 401 THU	-2885 -810
270CT19 -12 Days =	15 OCT 2019 363 WED	-3093
270CT19 -13 Days =	14 OCT 2019 335 TUE	192
_		
_		
	S65E	Avg-Daily Flow
270CT19 Today=	Average Flow over previous 14 days 27 OCT 2019 278 MON	Avg-Daily Flow
270CT19 -1 Day =	26 OCT 2019 271 SUN	364
270CT19 -2 Days =	25 OCT 2019 252 SAT	340
270CT19 -3 Days =	24 OCT 2019 238 FRI	268
270CT19 -4 Days =	23 OCT 2019 238 THU	345
270CT19 -5 Days =	22 OCT 2019 242 WED	342
270CT19 -6 Days =	21 OCT 2019 248 TUE	237
270CT19 -7 Days =	20 OCT 2019 256 MON	237
270CT19 -8 Days =	19 OCT 2019 267 SUN	235
270CT19 -9 Days =	18 OCT 2019 267 SAT	225
270CT19 - 10 Days =	17 OCT 2019 281 FRI	269
270CT19 -11 Days =	16 OCT 2019 286 THU	231
270CT19 - 12 Days =	15 OCT 2019 286 WED	231
270CT19 -13 Days =	14 OCT 2019 302 TUE	135
_	S65EX1	
	Average Flow over previous 14 days	Avg-Daily Flow
270CT19 Today=	27 OCT 2019 142 MON	101
270CT19 - 1 Day =	26 OCT 2019 148 SUN	117
270CT19 -2 Days =	25 OCT 2019 158 SAT	85
270CT19 -3 Days =	24 OCT 2019 172 FRI	39
270CT19 -4 Days =	23 OCT 2019 179 THU	104
270CT19 -5 Days =	22 OCT 2019 174 WED	145
270CT19 -6 Days =	21 OCT 2019 179 TUE	206
270CT19 -7 Days =	20 OCT 2019 172 MON	206
270CT19 -8 Days = 270CT19 -9 Days =	19 OCT 2019 166 SUN	204
270CT19 -9 Days = 270CT19 -10 Days =	18 OCT 2019 161 SAT 17 OCT 2019 162 FRI	110 136
270CT19 -10 Days = 270CT19 -11 Days =	17 OCT 2019 162 FRI 16 OCT 2019 162 THU	161
270CT19 -11 Days = 270CT19 -12 Days =	15 OCT 2019 160 WED	128
270CT19 -12 Days =	14 OCT 2019 164 TUE	252
1,00117 13 Days -	11 001 2019 101 10E	1 222

DATE 27 OCT 2019 26 OCT 2019 25 OCT 2019 24 OCT 2019 23 OCT 2019 21 OCT 2019 20 OCT 2019 19 OCT 2019 18 OCT 2019 17 OCT 2019 16 OCT 2019 15 OCT 2019 14 OCT 2019	533 419 7 4 7 3 3 275 1112 1200 959 319	Below S-77 Discharge (ALL-DAY) (AC-FT) 264 1066 793 162 304 1139 1194 751 582 880 1189 933 482 455	S-78 Discharge (ALL DAY) (AC-FT) 711 589 689 723 960 1574 2398 1565 382 366 360 238 306 306	S-79 Discharge (ALL DAY) (AC-FT) 1868 1412 616 745 2506 3150 2927 4302 661 259 757 482 782 1682	
DATE 27 OCT 2019 26 OCT 2019 25 OCT 2019 24 OCT 2019 23 OCT 2019 21 OCT 2019 20 OCT 2019 19 OCT 2019 18 OCT 2019 17 OCT 2019 16 OCT 2019 15 OCT 2019 14 OCT 2019	-106 -107 -63 -54 -147 -20 -102 10 126 353 113 103	S-351 Discharge (ALL DAY) (AC-FT) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	S-352 Discharge (ALL DAY) (AC-FT) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	S-354 Discharge (ALL DAY) (AC-FT) 0 0 0 0 0 0 0 0 365 702 980 875 0	L8 Canal Pt Discharge (ALL DAY) (AC-FT) -244 64 256 146 116 55 91 64 97 232 212 126 86 206
DATE 27 OCT 2019 26 OCT 2019 25 OCT 2019 24 OCT 2019 23 OCT 2019 21 OCT 2019 20 OCT 2019 19 OCT 2019 18 OCT 2019 17 OCT 2019 16 OCT 2019 15 OCT 2019 14 OCT 2019	-455 -1 -483 -2 -3 -2 -0 0 0 0	Below S-308 Discharge (ALL-DAY) (AC-FT) -1234 -470 208 -364 -NR145 -588 -198 1 193 60 -435 -80 -45	S-80 Discharge (ALL-DAY) (AC-FT) 30 37 14 18 34 38 34 19 11 34 31 32 20 27		

*** NOTE: Discharge (ALL DAY) is computed using Spillway, Sector Gate and

Lockages Discharges from 0015 hrs to 2400 hrs.

_

(I) - Flows preceded by "I" signify an instantaneous flow computed from the single value reported for the day

* On 11 May 1999, Lake Okeechobee Elevation was switched from Instantaneous 2400 value to an average-daily lake average. On 14 Mar 2001, due to the isolation of various gages within the standard

10 stations, the average of the interior 4 station gages was used as the Lake Okeechobee Elevation.

On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage mix of interior and edge gages to obtain a more reliable representation of the lake level.

On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage mix of interior and edge gages to obtain a more reliable representation of the lake level due to isolation of S135 from low lake levels.

Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations


++ For more information see the Jacksonville District Navigation website at http://www.saj.usace.army.mil/

\$ For information regarding Lake Okeechobee Service Area water restrictions

please refer to www.sfwmd.gov

Report Generated 280CT2019 @ 15:39 ** Preliminary Data - Subject to Revision



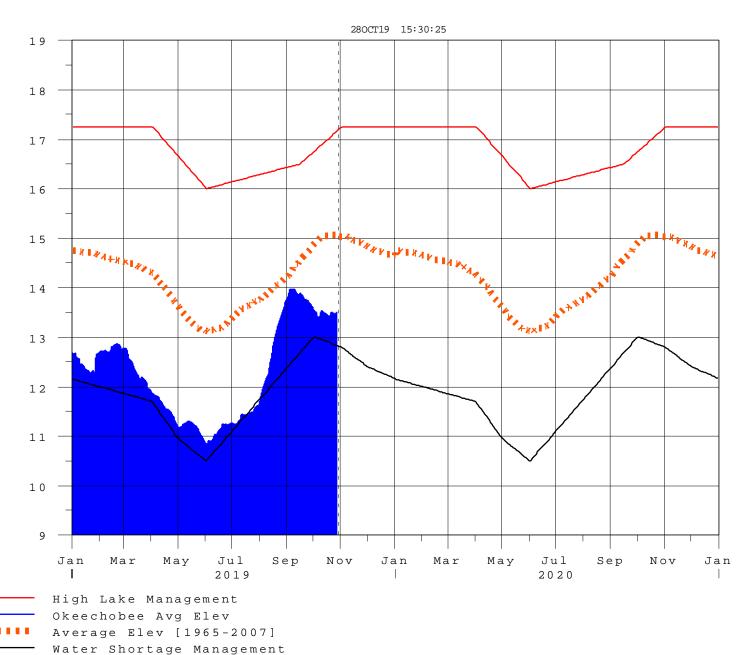

E 1 e

i n

F t N

G V D

Classification Tables

Supplemental Tables used in conjunction with the LORS2008

Release

Guidance Flow Charts

• Class Limits for Tributary Hydrologic Conditions

Table K-2 in the Lake Okeechobee Water Control Plan

• 6-15 Day Precipitation Outlook Categories

Table ?? in the Lake Okeechobee Water Control Plan

• Classification of Lake Okeechobee Net Inflow for Seasonal

Outlook

Table K-3 in the Lake Okeechobee Water Control Plan

Classification of Lake Okeechobee Net Inflow for Multi-

Seasonal Outlook

Table K-4 in the Lake Okeechobee Water Control Plan

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage

Tributary Hydrologic	Palmer Index	2-wk Mean L.O. Net
Classification*	Class Limits	Inflow Class Limits
Very Wet	3.0 or greater	Greater >= 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

^{*} use the wettest of the two indicators

Classification of Lake Okeechobee Net Inflow Seasonal Outlook*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
	20003	Seasonal Outlook
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

^{**}Volume-depth conversion based on average lake surface area of 467,000 acres

Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
		Multi-Seasonal Outlook
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

^{**}Volume-depth conversion based on average lake surface area of 467,000 acres

6-15 Day Precipitation Outlook Categories*

6-15 Day Precipitation Outlook Categories	WSE Decision Tree Categories	
Above Normal	Wet to Very Wet	
Normal	Normal	
Below Normal	Dry	

^{*} Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan

Under Construction