Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 12/30/2019 (ENSO Neutral Condition)

Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method¹, the SFWMD empirical method², a sub-sampling of Neutral years³ and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with La Nina ENSO years⁴. The results for Croley's method and the SFWMD empirical method are based on the <u>CPC Outlook</u>.

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season		oley's ethod ^{1*}	SFWMD Empirical Method ²		Neutr	ampling of al ENSO ears ³	Sub-sampling of AMO Warm + Neutral ENSO Years ⁴		
	Value (ft)	<u>Condition</u>	Value (ft)	<u>Condition</u>	Value (ft)	<u>Condition</u>	Value (ft)	<u>Condition</u>	
Current (Nov- Apr)	N/A	N/A	0.30	Dry	0.58	Normal	1.53	Wet	
Multi Seasonal (Nov- Oct)	N/A	N/A	3.20	Wet	3.31	Wet	5.38	Very Wet	

*Croley's Method Not Produced for This Report

See <u>Seasonal</u> and <u>Multi-Seasonal</u> tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

**Sub-sampling is a weighted average of ENSO conditions based on the ENSO forecast used.

Tributary Hydrologic Conditions Graph:

2212 cfs 14-day running average for Lake Okeechobee Net Inflow through 12/30/2019. According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

-0.66 for Palmer Index on 12/28/2019.

According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

The wetter of the two conditions above is Normal.

LORS2008 Classification Tables:

Lake Okeechobee Stage on 12/30/2019

Lake Okeechobee Stage: 13.14 feet

USACE Report for Lake Okeechobee

Lake Okeechobee Stage Hydrograph

	ee Management /Band	Bottom Elevation (feet, NGVD)	Current Lake Stage
High Lake Manage	ement Band	17.25	
	High sub-band	16.88	
Operational Band	Intermediate sub-band	16.25	
	Low sub-band	14.03	
Base Flow sub-ba	nd	12.61	← 13.14
Beneficial Use sub	o-band	12.18	
Water Shortage M	lanagement Band		

Part C of LORS2008: Discharge to WCA's

Up to Maximum Practicable to the WCAs if desirable or with minimum Everglades impact; otherwise no releases to WCAs.

Part D of LORS2008: Discharge to Tidewater

Release Guidance Flow Chart Outcome: S-79 Up to 450 cfs & S-80 Up to 200 cfs.

Adaptive Protocol's Release Guidance: Caloosahatchee Estuary

Release Guidance Flow Chart Outcome: S-79 Up to 450 cfs & S-77 baseflow release to supplement as needed.

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers LORSS Homepage

LORS2008 Implementation on 12/30/2019 (ENSO Neutral Condition):


Status for week ending 12/30/2019:

Water Supply Risk Evaluation

Area	Indicator	Value	Color Coded Scoring Scheme
	Projected LOK Stage for the next two months	Base-Flow Sub-Band	М
	Palmer Index for LOK Tributary Conditions	-0.66 (Normal to Extremely Wet)	L
		1 month: Normal	L
LOK	CPC Precipitation Outlook	3 months: Below Normal	М
	LOK Seasonal Net Inflow Outlook ENSO Forecast (positive)	0.58 ft (Dry)	М
	LOK Multi-Seasonal Net Inflow Outlook	3.31 ft (Wet)	L
	ENSO Forecast (positive)	(\\eta)	
	WCA 1: 3 Station Average (Site 1-7, Site 1-8T & Site 1-9)	Above Line 1 (16.67 ft)	L
WCAs	WCA 2A: Site 2-17 HW	Above Line 1 (12.27 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64, and 65)	Above Line 1 (9.67 ft)	L
	Service Area 1	Year-Round Irrigation Rule in effect	L
LEC	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L


Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow outlooks use slightly different classification intervals than those used by the 2008-LORS.

Lake Okeechobee SFWMM Dec 2019 Position Analysis

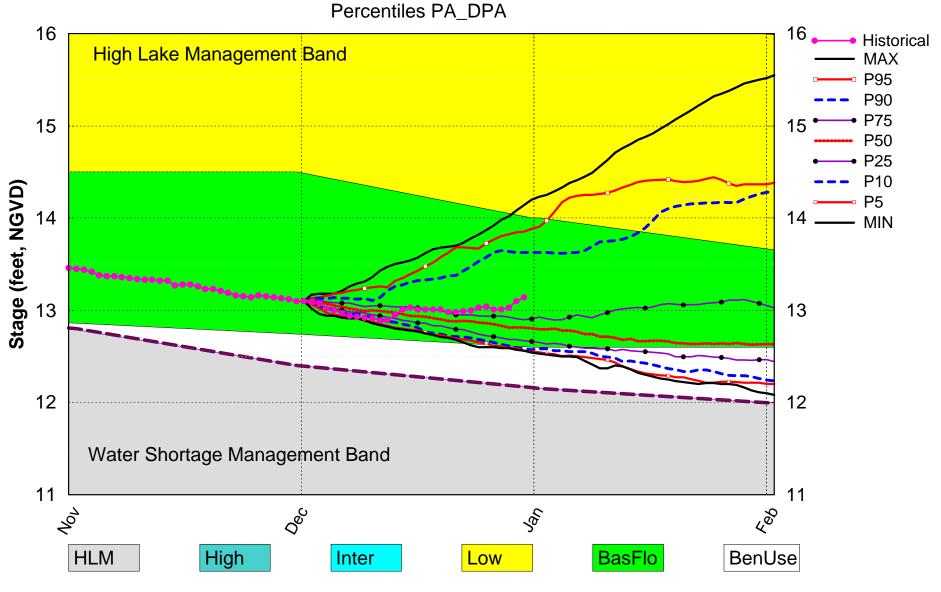

(See assumptions on the Position Analysis Results website)

Mon Dec 30 12:05:51 EST 2019

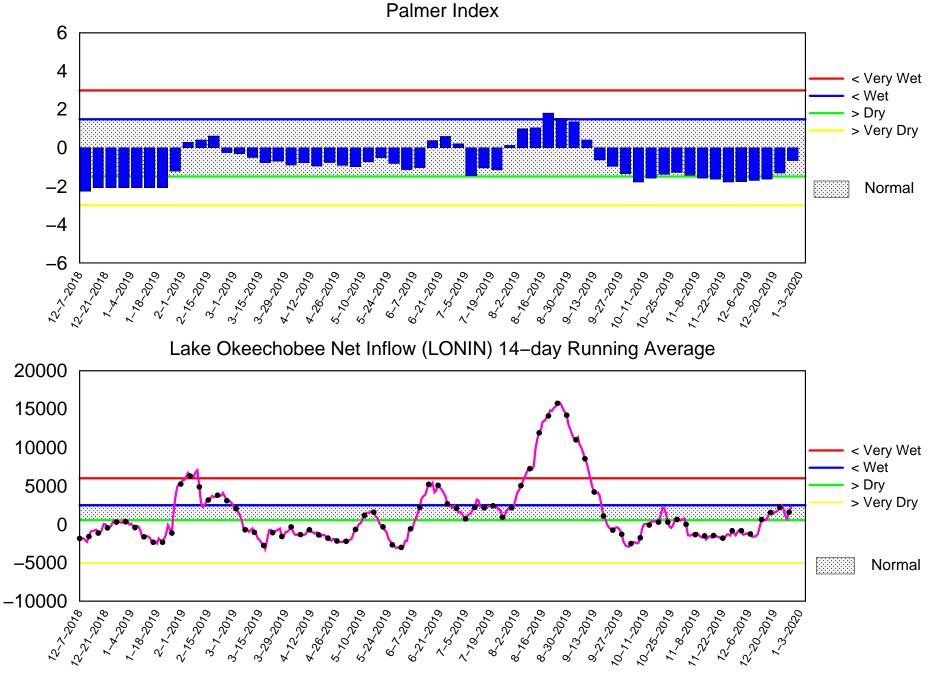


Tributary Basin Condition Indicators as of December 30 2019

Mon Dec 30 12:05:17 EST 2019

Flow (cfs)


2008 LORS


Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

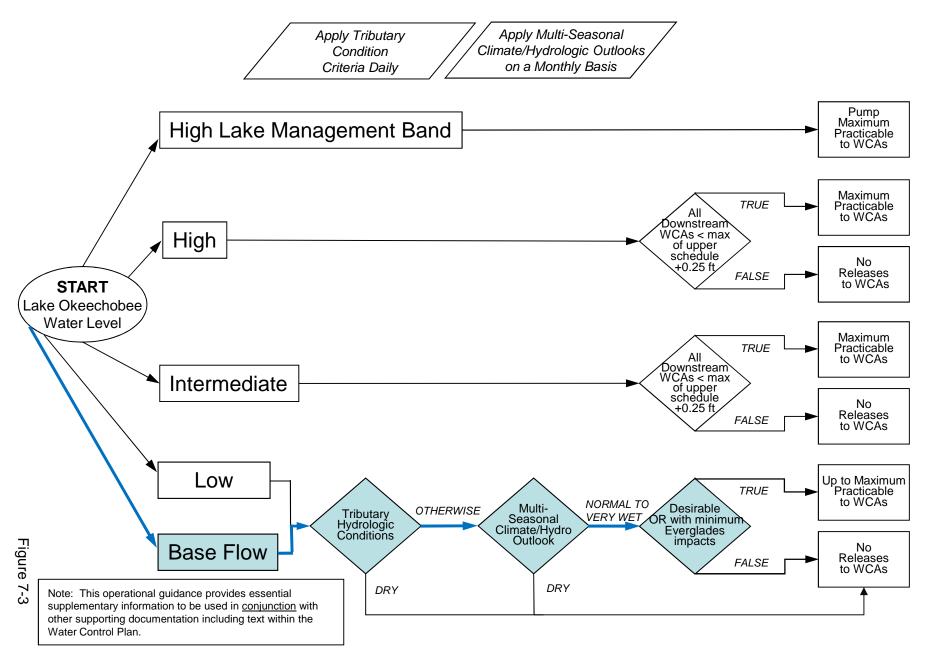

2008 LORS

Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

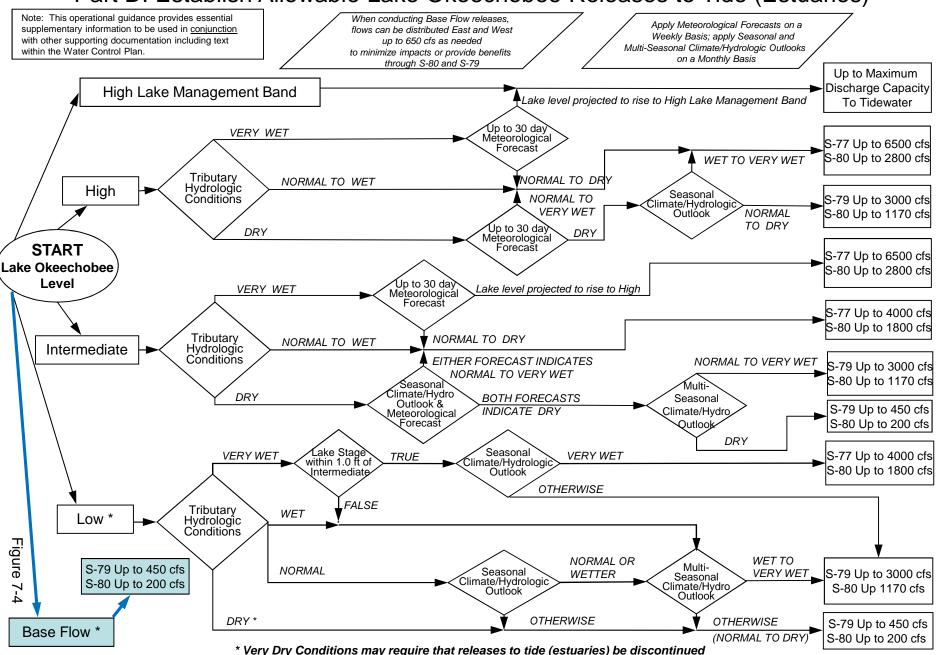

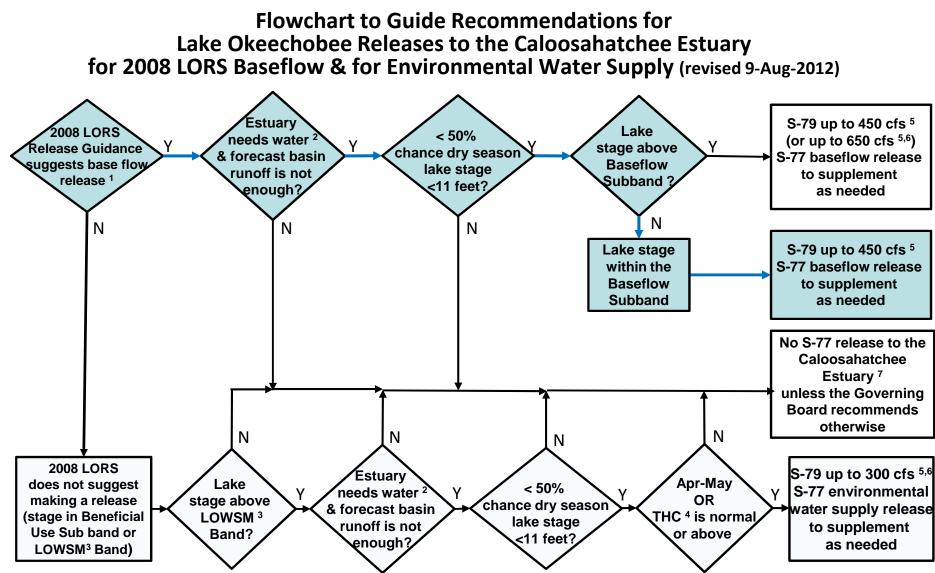

¹The 2008 LORS Release Guidance (Part D) can suggest baseflow releases in the Intermediate, Low, or Baseflow Subbands.

²Estuary "needs" water when the 30-day moving average salinity at I-75 bridge is projected to exceed 5 practical salinity units (psu) within 2 weeks.

³LOWSM = Lake Okeechobee Water Shortage Management.

⁴Tributary Hydrologic Condition (THC) is based on classification of Lake Okeechobee Net Inflow and Palmer Index.

⁵Can release less than the "up to" limit if lower release is sufficient to reach or sustain desired estuary salinity; cfs = cubic feet per second. ⁶After reviewing conditions in Water Conservation Areas (WCAs), Stormwater Treatment Areas (STAs), ENP, St. Lucie Estuary and Lake Okeechobee.

⁷Should this condition be reached, the Governing Board will be briefed at their next regularly scheduled meeting as part of the State of the Water Resources agenda item.

U. S. Army Corps of Engineers, Jacksonville District Lake Okeechobee and Vicinity Report ** Preliminary Data - Subject to Revision **

Data Ending 2400 hours 29 DEC 2019

Okeechobee Lake Regulation Elevation Last Year 2YRS Ago (ft-NGVD) (ft-NGVD) (ft-NGVD) *Okeechobee Lake Elevation 13.14 12.71 -NR- (Official Elv) Bottom of High Lake Mngmt= 17.25 Top of Water Short Mngmt= 12.18 Currently in Operational Management Band Simulated Average LORS2008 [1965-2000] 13.52 Difference from Average LORS2008 -0.38 29DEC (1965-2007) Period of Record Average 14.65 Difference from POR Average -1.51 Today Lake Okeechobee elevation is determined from the 4 Int & 4 Edge stations ++Navigation Depth (Based on 2007 Channel Condition Survey) Route 1 ÷ 7.08' ++Navigation Depth (Based on 2008 Channel Condition Survey) Route 2 ÷ 5.28' Bridge Clearance = 50.02' 4 Interior and 4 Edge Okeechobee Lake Average (Avg-Daily values): L001 L005 L006 LZ40 S4 S352 S308 S133 13.14 13.17 13.13 13.12 13.14 13.22 13.08 13.11 *Combination Okeechobee Avg-Daily Lake Average = 13.14 (*See Note) Okeechobee Inflows (cfs): S65E 567 S65EX1 0 Fisheating Cr 16 S154 0 S191 406 S135 Pumps 0 S84 523 S133 Pumps 0 S2 Pumps 0 S84X 0 S127 Pumps 0 S3 Pumps 0 S4 Pumps S71 92 S129 Pumps 0 0 S131 Pumps 0 C5 0 S72 0 Total Inflows: 1604 Okeechobee Outflows (cfs): 579 S135 Culverts S354 0 S77 0 S127 Culverts 0 S351 0 S308 -1441 S129 Culverts S352 0 0 S131 Culverts 0 L8 Canal Pt -263 Total Outflows: -1125 ****S77 structure flow is being used to compute Total Outflow. ****S308 structure flow is being used to compute Total Outflow. Okeechobee Pan Evaporation (inches): S77 0.14 S308 0.11 Average Pan Evap x 0.75 Pan Coefficient = 0.09" = 0.01'

Lake Average Precipitation using NEXRAD: = 0.00" = 0.00'

Evaporation - Precipitation:	=	0.09" =	= 0.01		
Evaporation - Precipitation using Lake Ar	rea	of 730	square	miles	
is equal to 1840 cfs out of the lake.	•				
Lake Okeechobee (Change in Storage) Flow	is	8470	cfs or	16800	AC-FT

		Tailwater				Gat	te Pos	sition	1s		
		Elevation				#3	#4	#5	#6	#7	#8
	(ft-msl)	(ft-msl)					(ft)	(ft)	(ft)	(ft)	(ft)
		(I) see r	note at	: bott	tom					
North East Sl	hore										
S133 Pumps	: 13.48	13.21	0	0	0	0	0	0	(cfs	5)	
S193:											
S191:	19.57	13.18	406	- NR -	0.0	1.1					
S135 Pumps	: 13.37	13.05	0	0	0	0	0		(cfs	5)	
S135 Culve	rts:		0	0.0	0.0						
North West Sl	hore										
S65E:	20.81	12.84	567	0.0	99	a a	a a	0.5	0.0		
S65EX1:	20.81	12.84	0	0.0	0.0	0.0	0.0	0.5	0.0		
S127 Pumps		13.16	0 0	0	0	0	0	0	(cfs	;)	
S127 Culve		13.10	0	0.0	0	0	0	0	(01)	,	
SIZ/ CUIVE			U	0.0							
S129 Pumps	: 13.13	13.24	0	0	0	0			(cfs	5)	
S129 Culve			0	0.0					•		
C121 D	12.02	12 24	0	0	•				1.5		
S131 Pumps		13.21	0	0	0				(cfs	5)	
S131 Culve	rt:		0								
Fisheating	Creek										
nr Palmda		28.79	16								
nr Lakepo	ort		-								
C5:		-NR-	0	-NF	RNF	RNI	۲-				
South Shore											
S4 Pumps:	12.01	13.10	0	0					(cfs	5)	
S169:	13.18	12.03	0	0.0	0.0	0.0					
S310:	13.04		-13								
S3 Pumps:	9.60	13.11	0	0	0	0			(cfs	5)	
S354:	13.11	9.60	0	0.0							
S2 Pumps:	9.30	- NR -	0		-NR-		-NR-		(cfs	5)	
S351:	-NR-	9.30	0		0.0	0.0					
S352:	13.20	9.14	0	0.0							
C10A:	-NR-	13.27		8.0	8.6	8 6	.0 0	0.0	0.0		
L8 Canal P	Т	13.10	-263								
	S35	1 and S352	Tempora	ary Pun	nps/S	354 Sj	oillwa	ay			
S351:	9.30	- NR -	0	-NR N	IR – – NF	RNR	NR	-NR-			
\$352:	9.14	13.20	0	-NR N							
\$354:	9.60	13.11	0	-NR N							
Caloosahatch	ee River (S77, S78.	S79)								
S47B:	- (11.52	,	0.0	0.0						
S47D:	11.53	11.53	-36	6.5							

S77: Spillway and Sector Preferred Flow: 12.95 11.41 577 0.0 3.0 0.5 0.0 2 Flow Due to Lockages+: \$78: Spillway and Sector Flow: 660 1.0 0.0 0.0 1.0 11.44 2.82 Flow Due to Lockages+: 10 S79: Spillway and Sector Flow: 2.98 1127 1.0 1.0 1.0 1.0 1.0 0.0 0.0 0.0 1.34 Flow Due to Lockages+: 8 Percent of flow from S77 51% Chloride (ppm) 0 St. Lucie Canal (S308, S80) S308: Spillway and Sector Preferred Flow: 13.08 13.48 -1440 3.0 3.0 3.0 3.0 Flow Due to Lockages+: -1 S153: 19.03 13.30 43 0.0 0.0 S80: Spillway and Sector Flow: 14.01 0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 1.37 Flow Due to Lockages+: 15 Percent of flow from S308 NA % (mg/ml) **** Steele Point Top Salinity Steele Point Bottom Salinity (mg/ml) **** (mg/ml) **** Speedy Point Top Salinity Speedy Point Bottom Salinity (mg/ml) ****

 + Flow Due to lockages is computed utilizing average daily headwater and tailwater along with total number of lockages for the day to calculate a volume which is then converted to an average discharge in cfs.
 ++ Preferred flow is determined from either the spillway discharge or the below flow meter daily

				Wi	.nd
Daily Precipitation Totals	1-Day	3-Day	7-Day	Directio	n Speed
	(inches)	(inches)	(inches)	(Degø)	(mph)
S133 Pump Station:	- NR -	0.00	0.00		
S193:	- NR -	0.00	0.00	- NR -	- NR -
Okeechobee Field Station:	- NR -	0.00	0.00		
S135 Pump Station:	- NR -	0.00	0.00		
S127 Pump Station:	- NR -	0.00	0.00		
S129 Pump Station:	- NR -	0.00	0.00		
S131 Pump Station:	- NR -	0.00	0.00		
S77:	9.22	10.22	10.33	141	7
S78:	3.81	4.05	4.20	121	6
S79:	5.30	5.32	5.49	111	4
S4 Pump Station:	- NR -	0.00	0.00		
Clewiston Field Station:	- NR -	0.00	0.00		
S3 Pump Station:	- NR -	0.00	0.00		
S2 Pump Station:	- NR -	0.00	0.00		
S308:	36.24	36.97	37.00	147	6
S80:	15.68	19.35	19.71	171	3
Okeechobee Average	22.73	3.63	3.64		

(Sites S78, S79 and S80 not included)

Oke Nexrad Basin Avg	0.00	0.56	0.59

Okeechobee Lake Elevations	29 DEC 2019	13.14 Differen	nce from 29DEC19
29DEC19 -1 Day =	28 DEC 2019	13.10	-0.04
29DEC19 -2 Days =	27 DEC 2019	13.03	-0.11
29DEC19 -3 Days =	26 DEC 2019	13.01	-0.13
29DEC19 -4 Days =	25 DEC 2019	13.01	-0.13
29DEC19 -5 Days =	24 DEC 2019	13.04	-0.10
29DEC19 -6 Days =	23 DEC 2019	13.03	-0.11
29DEC19 -7 Days =	22 DEC 2019	13.00	-0.14
29DEC19 -30 Days =	29 NOV 2019	13.10	-0.04
29DEC19 -1 Year =	29 DEC 2018	12.71	-0.43
29DEC19 -2 Year =	29 DEC 2017	-NR-	- NR -

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = 1.94

				Lake	0kee	chobee	Net Inflo	ow (LONIN)	
			Aver	age Flo	W OV	er the	previous	14 days	Avg-Daily Flow
29DEC19	-	Гoday	=	29	DEC	2019	2587	MON	9047
29DEC19	-1	Day	=	28	DEC	2019	1682	SUN	15250
29DEC19	-2	Days	=	27	DEC	2019	944	SAT	4407
29DEC19	-3	Days	=	26	DEC	2019	1506	FRI	498
29DEC19	-4	Days	=	25	DEC	2019	2359	THU	-5224
29DEC19	-5	Days	=	24	DEC	2019	2877	WED	3431
29DEC19	-6	Days	=	23	DEC	2019	2507	TUE	6780
29DEC19	-7	Days	=	22	DEC	2019	2078	MON	2494
29DEC19	-8	Days	=	21	DEC	2019	1943	SUN	2591
29DEC19	-9	Days	=	20	DEC	2019	1822	SAT	262
29DEC19	-10	Days	=	19	DEC	2019	1600	FRI	-5595
29DEC19	-11	Days	=	18	DEC	2019	1802	THU	811
29DEC19		-		17	DEC	2019	1640	WED	731
29DEC19	-13	Days	=	16	DEC	2019	966	TUE	732

				Se	55E				
			Average	Flow	v over	previous	14 days	Avg-Daily	Flow
9DEC19		Today=	29	DEC	2019	422	MON	658	
9DEC19	-1	Day =	28	DEC	2019	398	SUN	640	
9DEC19	-2	Days =	27	DEC	2019	378	SAT	322	
9DEC19	-3	Days =	26	DEC	2019	388	FRI	396	
9DEC19	-4	Days =	25	DEC	2019	400	THU	157	
9DEC19	-5	Days =	24	DEC	2019	406	WED	299	
9DEC19		Days =	23	DEC	2019	418	TUE	301	
		Days =	22	DEC	2019	422	MON	536	
9DEC19	-8	Days =	21	DEC	2019	411	SUN	342	
9DEC19	-9	Days =	20	DEC	2019	407	SAT	479	
9DEC19	-10	Days =	19	DEC	2019	392	FRI	494	
9DEC19	-11	Days =	18	DEC	2019	383	THU	500	
9DEC19	-12	Days =	17	DEC	2019	367	WED	464	
9DEC19	-13	Days =	16	DEC	2019	350	TUE	322	
				Se	55EX1			 	
			Average	Flow	v over	previous	14 days	Avg-Daily	Flow
9DEC19		Today=	29	DEC	2019	50	MON	0	
9DEC19	-1	Day =	28	DEC	2019	50	SUN	0	
9DEC19	-2	Days =	27	DEC	2019	50	SAT	0	

29DEC19	-3 Days	=	26	DEC	2019	50) FRI	I 77	
29DEC19	-4 Days	=	25	DEC	2019	4	5 THU	J 344	
29DEC19	-5 Days	=	24	DEC	2019	20) WED) 217	
29DEC19	-6 Days	=	23	DEC	2019	1	5 TUE	69	
29DEC19	-7 Days	=	22	DEC	2019	() MON	I 0	
29DEC19	-8 Days	=	21	DEC	2019	() SUN	I 0	
29DEC19	-9 Days	=	20	DEC	2019	(5 SAT	- 0	
29DEC19	-10 Days	=	19	DEC	2019	14	1 FRI	[0	
29DEC19	-11 Days	=	18	DEC	2019	14	1 THU	J 0	
29DEC19	-12 Days	=	17	DEC	2019	14	1 WEC) 0	
29DEC19	-13 Days	=	16	DEC	2019	20) TUE	. 0	

Lake Okeechobee Outlets Last 14 Days

DATE 29 DEC 2019 28 DEC 2019 27 DEC 2019 26 DEC 2019 25 DEC 2019 24 DEC 2019 23 DEC 2019 23 DEC 2019 21 DEC 2019 20 DEC 2019 19 DEC 2019 18 DEC 2019 16 DEC 2019	875 169 238 610 747 812 1042 892 85 507 1057 1084	Below S-77 Discharge (ALL-DAY) (AC-FT) 1417 1204 402 471 745 720 823 837 1033 461 668 1249 1373 957	S-78 Discharge (ALL DAY) (AC-FT) 1328 969 313 928 891 893 1132 1751 1733 1437 761 1168 1198 1013	S-79 Discharge (ALL DAY) (AC-FT) 2254 1975 1346 1219 1745 1471 1979 2723 3341 2830 1761 1057 1142 1641	
DATE 29 DEC 2019 28 DEC 2019 27 DEC 2019 26 DEC 2019 25 DEC 2019 24 DEC 2019 23 DEC 2019 21 DEC 2019 20 DEC 2019 20 DEC 2019 19 DEC 2019 18 DEC 2019 18 DEC 2019 16 DEC 2019	-44 4 9 9 12 8 -64 1 -38 -15 97 48	S-351 Discharge (ALL DAY) (AC-FT) 0 0 0 365 803 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	S-352 Discharge (ALL DAY) (AC-FT) 0 0 136 356 609 0 0 0 0 0 0 39 173 142	S-354 Discharge (ALL DAY) (AC-FT) 0 0 0 0 89 319 0 0 0 0 0 0 91 141 303	L8 Canal Pt Discharge (ALL DAY) (AC-FT) -521 -482 -71 -43 -130 -16 37 -122 -166 -143 -134 -65 -190 -52
DATE 29 DEC 2019 28 DEC 2019 27 DEC 2019 26 DEC 2019 25 DEC 2019 24 DEC 2019	-2044 -24 706 677	Below S-308 Discharge (ALL-DAY) (AC-FT) -3111 -1632 -280 -230 -365 -479	3 S-80 Discharg (ALL-DAY (AC-FT) 30 24 30 26 13 25		

23 DEC	2019	-788	-205	25
22 DEC	2019	-221	-279	21
21 DEC	2019	358	-279	23
20 DEC	2019	577	-56	30
19 DEC	2019	276	-537	- NR -
18 DEC	2019	517	-592	29
17 DEC	2019	-25	-689	47
16 DEC	2019	400	-604	50


^{***} NOTE: Discharge (ALL DAY) is computed using Spillway, Sector Gate and Lockages Discharges from 0015 hrs to 2400 hrs.

(I) - Flows preceeded by "I" signify an instantaneous flow computed from the single value reported for the day

*	On 11 May 1999, Lake Okeechobee Elevation was switched from
	Instantaneous 2400 value to an average-daily lake average.
	On 14 Mar 2001, due to the isolation of various gages within the standard
	10 stations, the average of the interior 4 station gages was used
	as the Lake Okeechobee Elevation.
	On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage
	mix of interior and edge gages to obtain a more reliable representation
	of the lake level.
	On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage
	mix of interior and edge gages to obtain a more reliable representation
	of the lake level due to isolation of S135 from low lake levels.
	Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations
++	For more information see the Jacksonville District Navigation website
	at http://www.saj.usace.army.mil/

\$ For information regarding Lake Okeechobee Service Area water restrictions
please refer to www.sfwmd.gov

Report Generated 30DEC2019 @ 23:39 ** Preliminary Data - Subject to Revision **

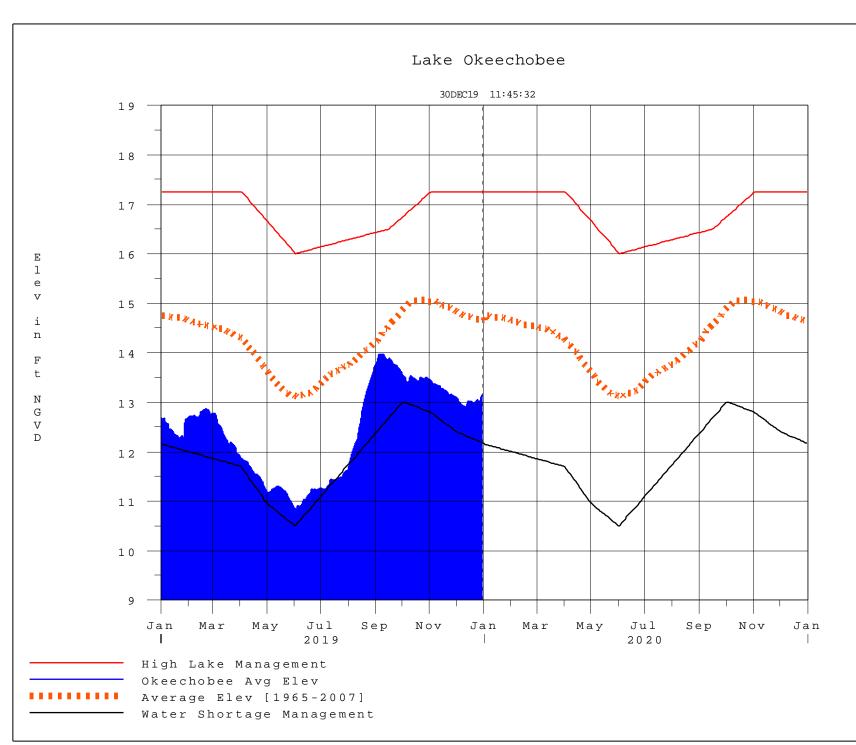

Classification Tables

Supplemental Tables used in conjunction with the LORS2008 Release

Guidance Flow Charts

• Class Limits for Tributary Hydrologic Conditions

Table K-2 in the Lake Okeechobee Water Control Plan

• <u>6-15 Day Precipitation Outlook Categories</u>

Table ?? in the Lake Okeechobee Water Control Plan

<u>Classification of Lake Okeechobee Net Inflow for Seasonal</u>

<u>Outlook</u>

 Table K-3 in the Lake Okeechobee Water Control Plan

<u>Classification of Lake Okeechobee Net Inflow for Multi-</u>

Seasonal Outlook

 Table K-4 in the Lake Okeechobee Water Control Plan

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage

Tributary Hydrologic Classification*	Palmer Index Class Limits	2-wk Mean L.O. Net Inflow Class Limits
Very Wet	3.0 or greater	Greater >= 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

* use the wettest of the two indicators

Classification of Lake Okeechobee Net Inflow Seasonal Outlook*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
[]	[]	Seasonal Outlook
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

**Volume-depth conversion based on average lake surface area of 467,000 acres

Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
		Multi-Seasonal Outlook
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

**Volume-depth conversion based on average lake surface area of 467,000 acres

6-15 Day Precipitation Outlook Categories*

6-15 Day Precipitation Outlook Categories	WSE Decision Tree Categories	
Above Normal	Wet to Very Wet	
Normal	Normal	
Below Normal	Dry	

* Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan

Under Construction