Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 7/22/2019 (ENSO Neutral Condition)

Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method[1], the SFWMD empirical method[2], a sub-sampling of Neutral years[3] and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with La Nina ENSO years[4]. The results for Croley's method and the SFWMD empirical method are based on the CPC Outlook.

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season	Croley's Method[1*]		SFWMD Empirical Method[2]		Sub-sampling of Neutral ENSO Years[3]		Sub-sampling of AMO Warm + Neutral ENSO Years[4]	
	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition
Current (Jul-Dec)	N/A	N/A	2.12	Very Wet	2.60	Very Wet	3.64	Very Wet
Multi Seasonal (Jul-Apr)	N/A	N/A	2.64	Wet	3.05	Wet	4.89	Very Wet

*Croley's Method Not Produced for This Report

See Seasonal and Multi-Seasonal tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

**Sub-sampling is a weighted average of ENSO conditions based on the ENSO forecast used.

Tributary Hydrologic Conditions Graph:

2285 cfs 14-day running average for Lake Okeechobee Net Inflow through 7/21/2019.
According to the classification in Tributary Hydrologic Conditions table, this condition is Normal.

-1.14 for Palmer Index on 7/20/2019.
According to the classification in Tributary Hydrologic Conditions table, this condition is Normal.

The wetter of the two conditions above is **Normal**.

LORS2008 Classification Tables:

Lake Okeechobee Stage on 7/22/2019

Lake Okeechobee Stage: **11.51 feet**

USACE Report for Lake Okeechobee

Lake Okeechobee Stage Hydrograph

Lake Okeechobee Management Zone/Band		Bottom Elevation (feet, NGVD)	Current Lake Stage
High Lake Management Band		16.24	
Operational Band	High sub-band	15.80	
	Intermediate sub-band	15.36	
	Low sub-band	13.48	
Base Flow sub-band		12.60	
Beneficial Use sub-band		11.53	
Water Shortage Management Band			← 11.51

Part C of LORS2008: Discharge to WCA's

Lake Okeechobee stage is below the Base-Flow Sub-Band therefore, no releases to the WCAs to manage lake stages

Part D of LORS2008: Discharge to Tidewater

Lake Okeechobee stage is below the Base-Flow Sub-Band therefore, no releases to the St. Lucie or Caloosahatchee Estuaries to manage lake stages.

Adaptive Protocol's Release Guidance: Caloosahatchee Estuary

Release Guidance Flow Chart Outcome: No releases.

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers LORSS Homepage

LORS2008 Implementation on 07/22/2019 (ENSO El Niño Condition):

Status for week ending 07/22/2019:
District wide, Raindar rainfall was 1.20 inches for the week. Lake stage on 7/22/2019 was 11.51 ft, NGVD, up 0.04 ft from last week .The updated July 2019 SFWMM Dynamic Position Analysis percentile graph for Lake Okeechobee show that the current lake stage is in the Water Shortage Management Band. The LORS2008 Tributary Hydrologic Conditions (THC) are classified as **Normal.** The PDI indicates normal conditions and the LONIN is normal. The THC classification is based on the wetter of the two indices.

Water Supply Risk Evaluation

Area	Indicator	Value	Color Coded Scoring Scheme
LOK	Projected LOK Stage for the next two months	Beneficial Use Sub-Band	M
	Palmer Index for LOK Tributary Conditions	-1.14 (Dry)	M
	CPC Precipitation Outlook	1 month: Normal	L
		3 months: Normal	L
	LOK Seasonal Net Inflow Outlook	2.60 ft (Normal to Extremely Wet)	L
	ENSO Forecast (positive)		
	LOK Multi-Seasonal Net Inflow Outlook	3.05 ft (Normal)	M
	ENSO Forecast (positive)		
WCAs	WCA 1: Canal Gauge (Site 1-8C)	Above Line 1 (16.29 ft)	L
	WCA 2A: Site 2-17 HW	Above Line 1 (12.11 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64, and 65)	Above Line 1 (9.50 ft)	L
LEC	Service Area 1	Year-Round Irrigation Rule in effect	L
	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L

Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow outlooks use slightly different classification intervals than those used by the 2008-LORS.

Lake Okeechobee SFWMM July 2019 Position Analysis

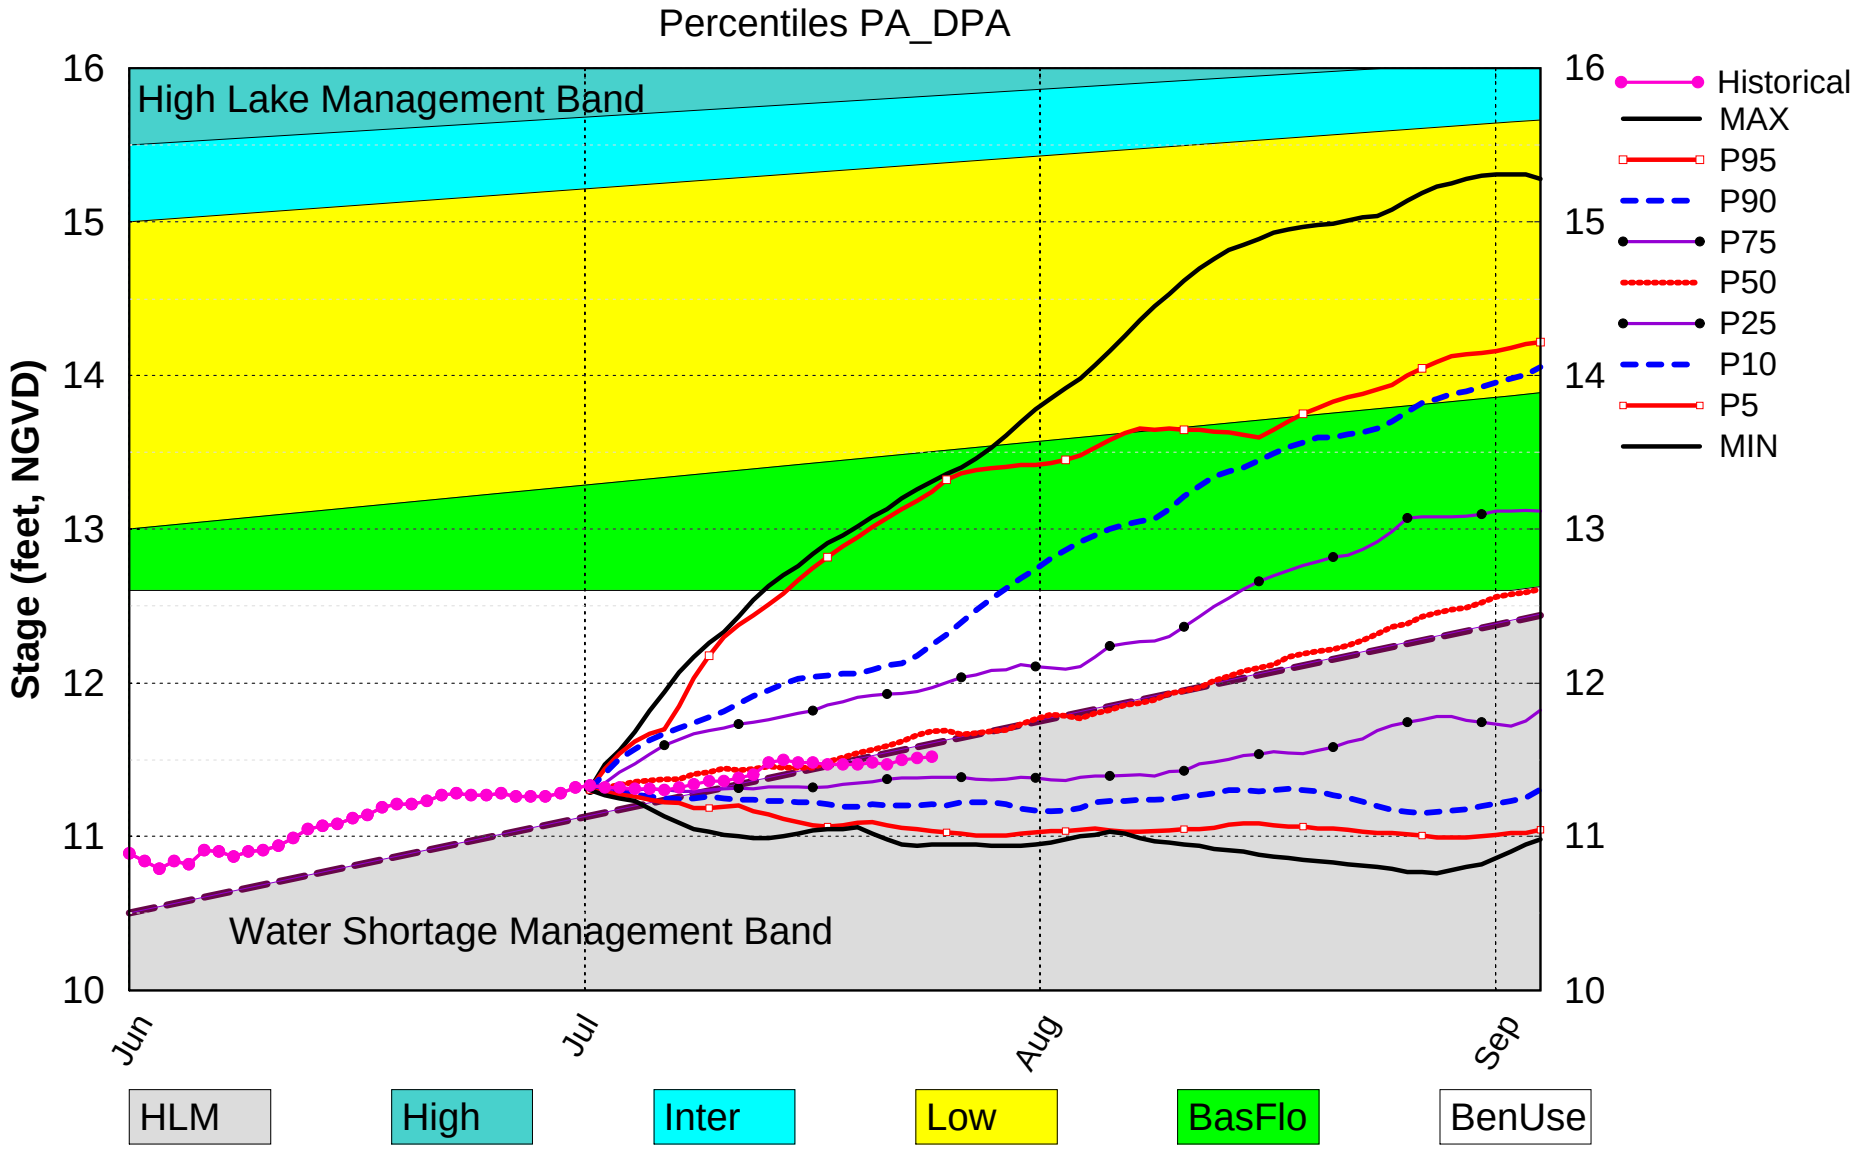

(See assumptions on the Position Analysis Results website)

Tue Jul 23 09:11:18 2019

Tributary Basin Condition Indicators as of July 22 2019

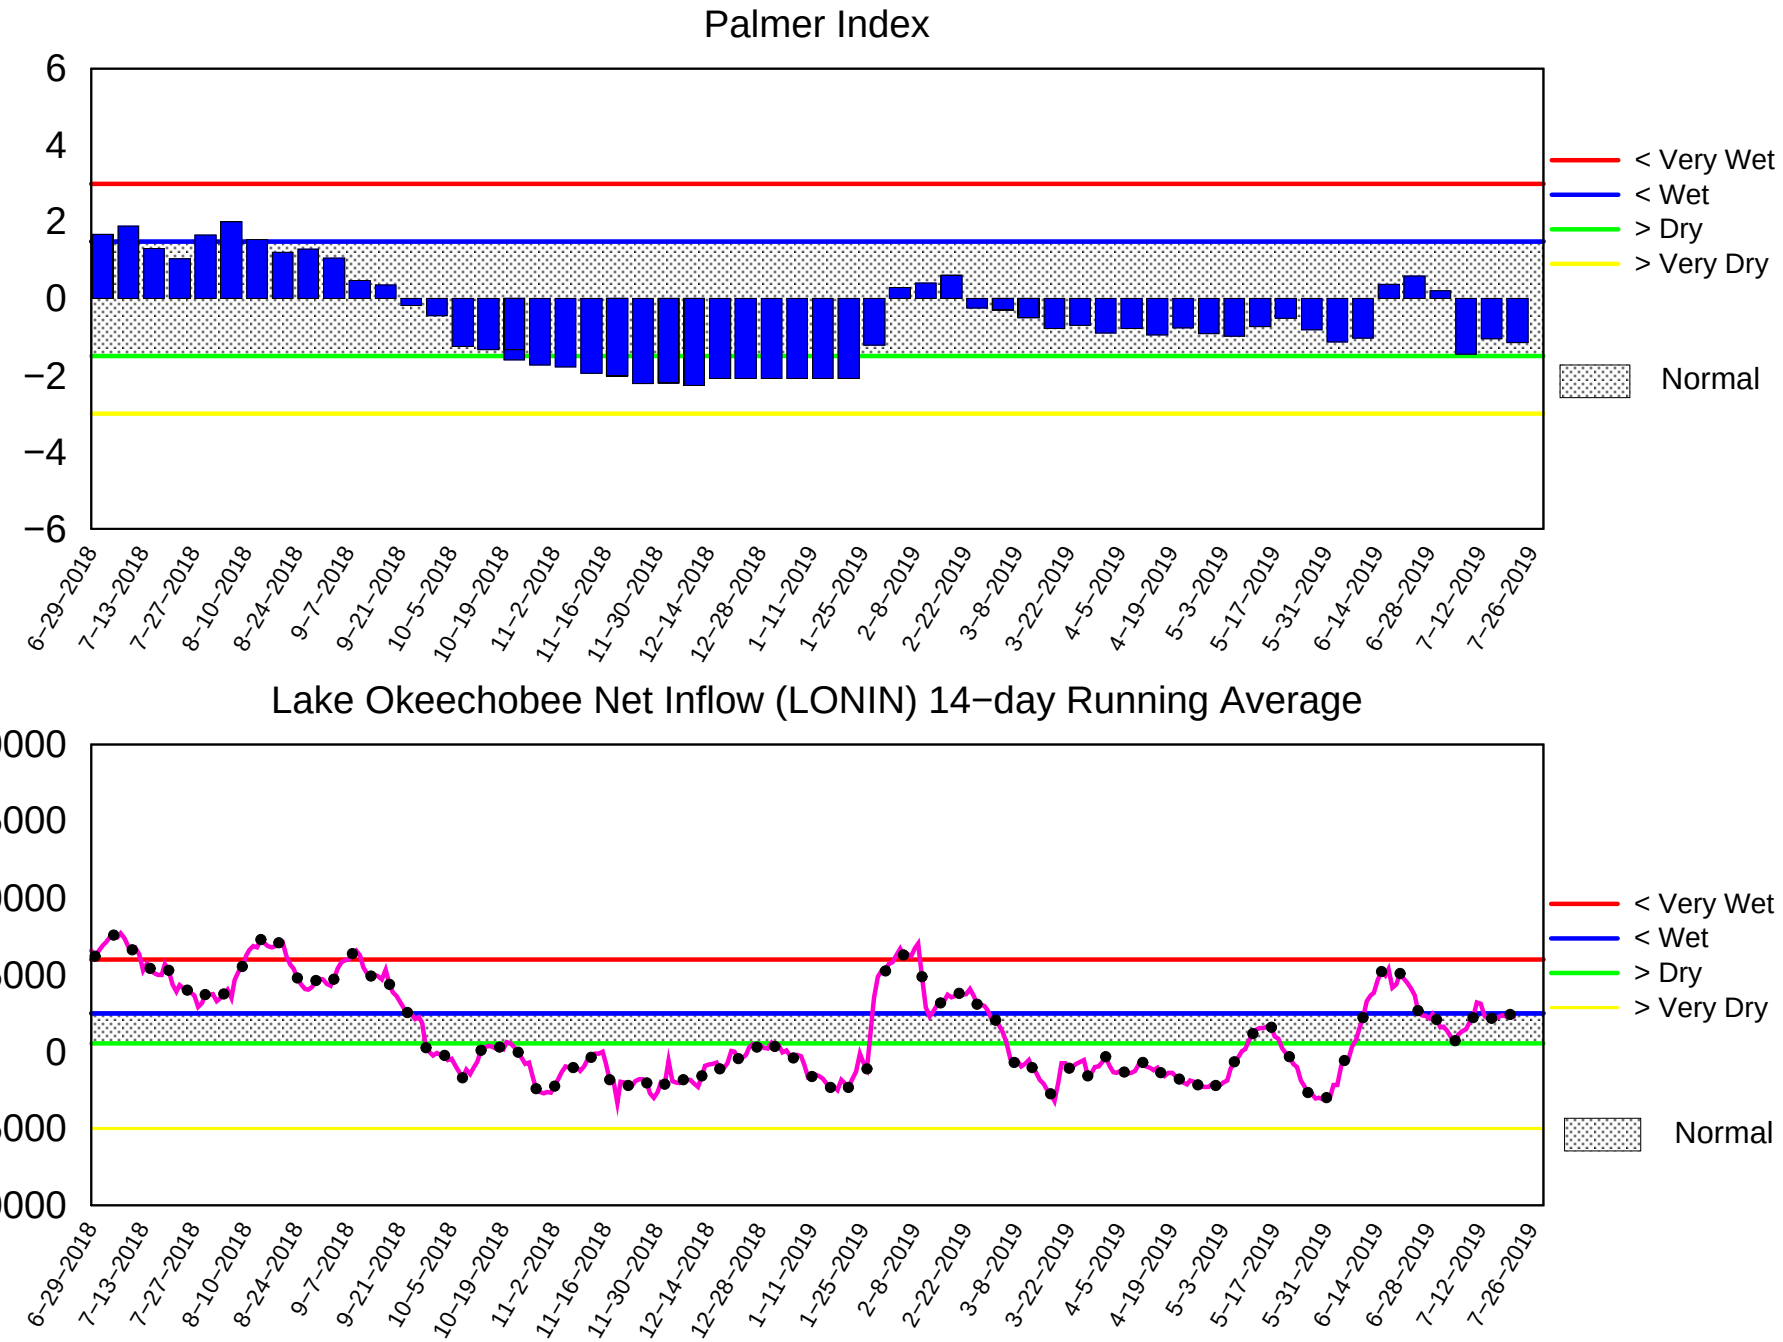

Mon Jul 22 15:42:14 2019

2008 LORS

Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

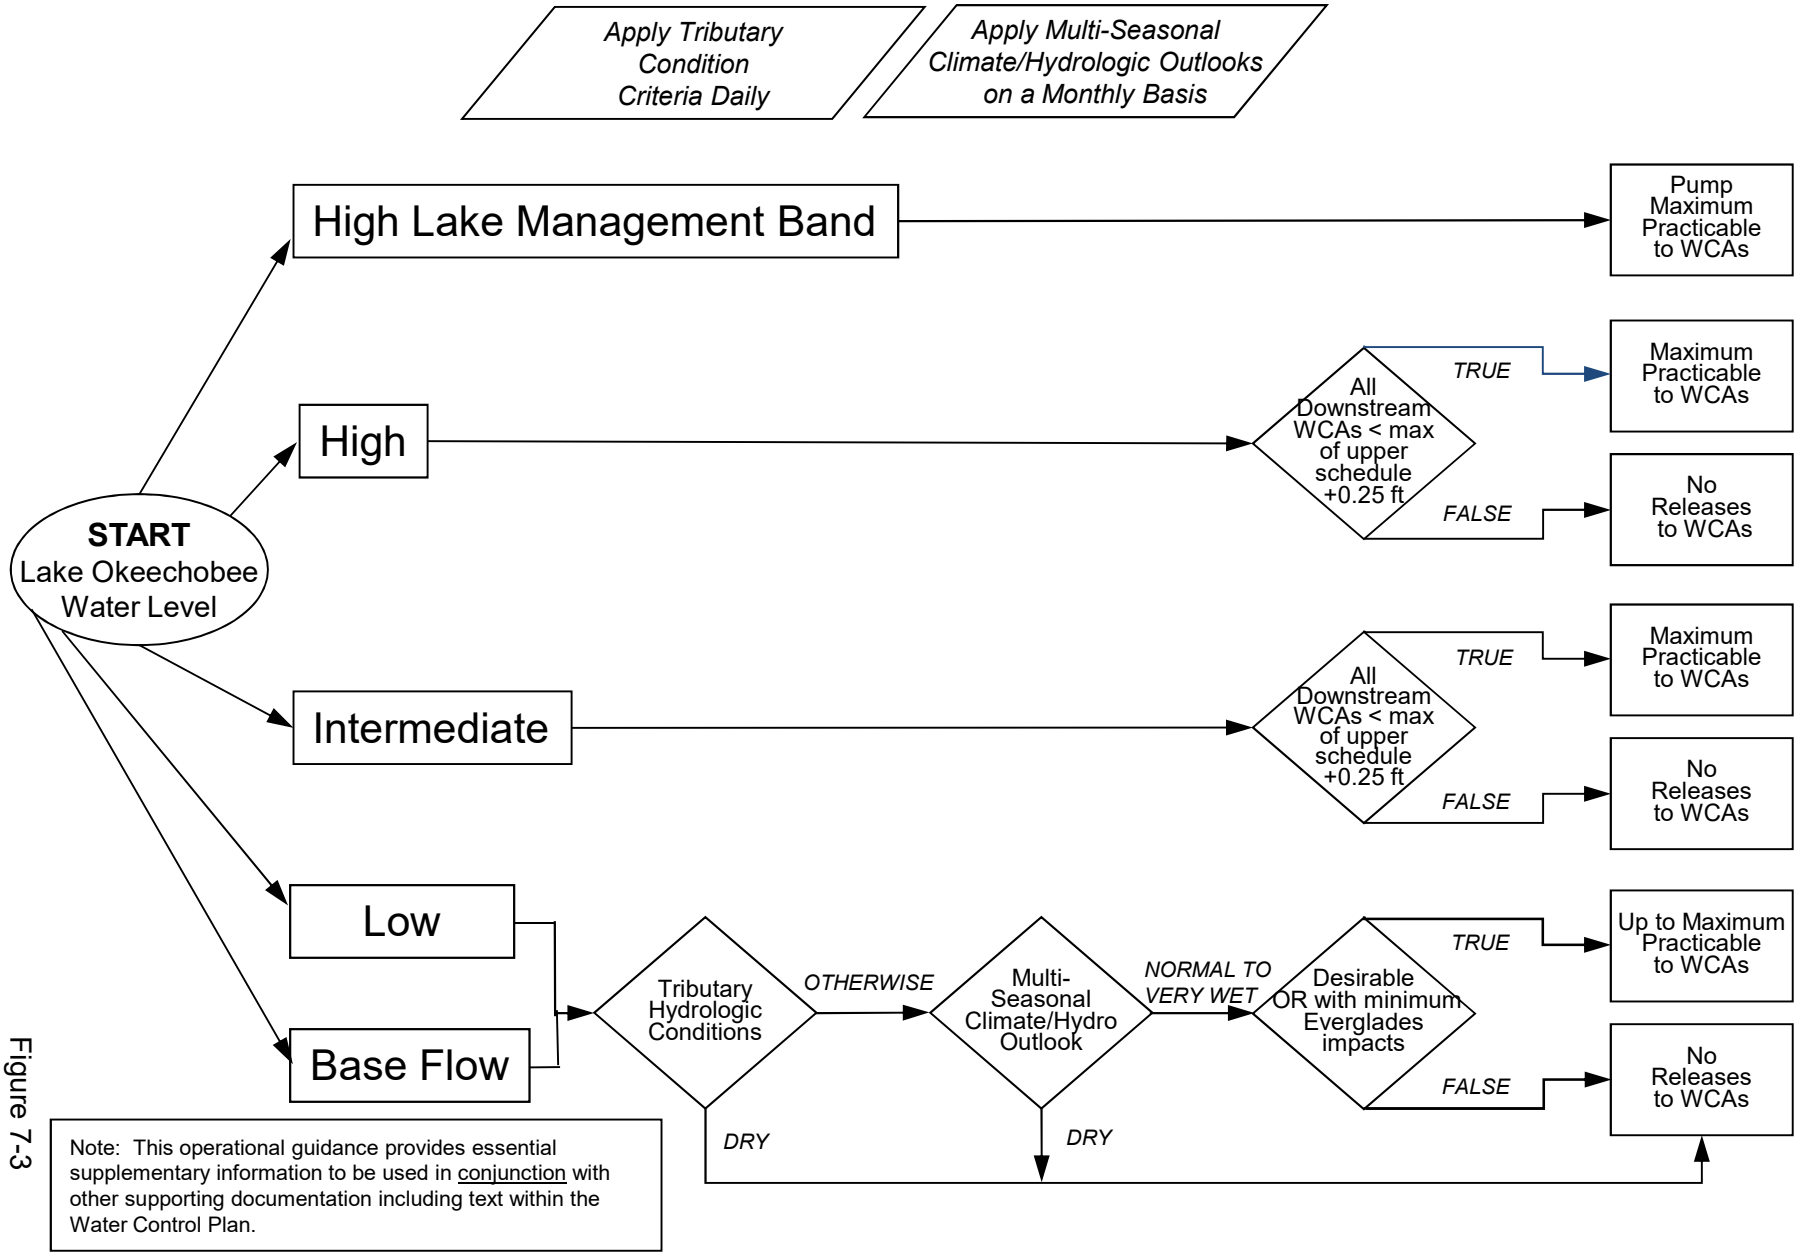

Figure 7-3

2008 LORS

Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

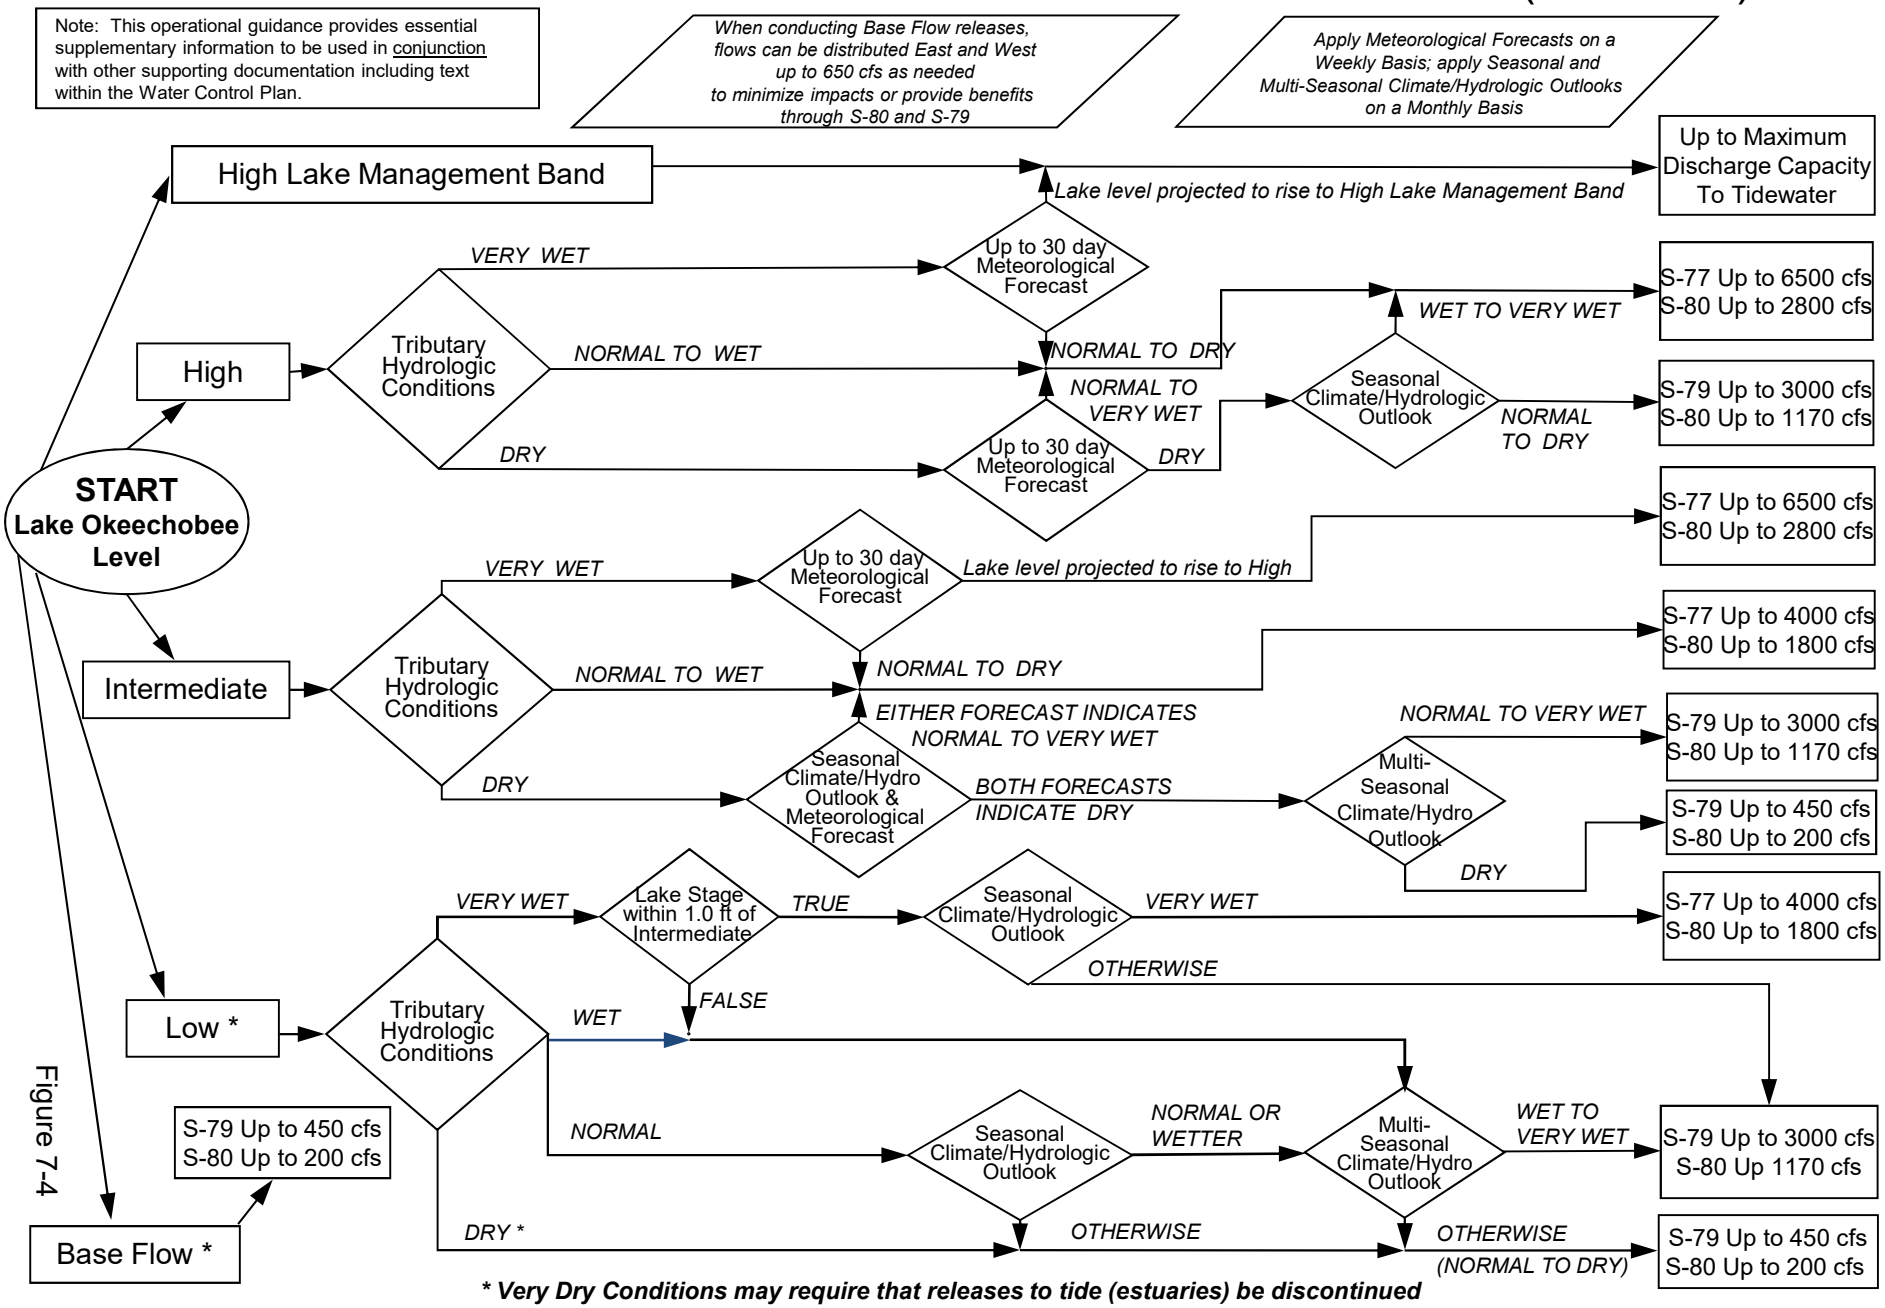

Figure 7-4

Flowchart to Guide Recommendations for Lake Okeechobee Releases to the Caloosahatchee Estuary for 2008 LORS Baseflow & for Environmental Water Supply (revised 9-Aug-2012)

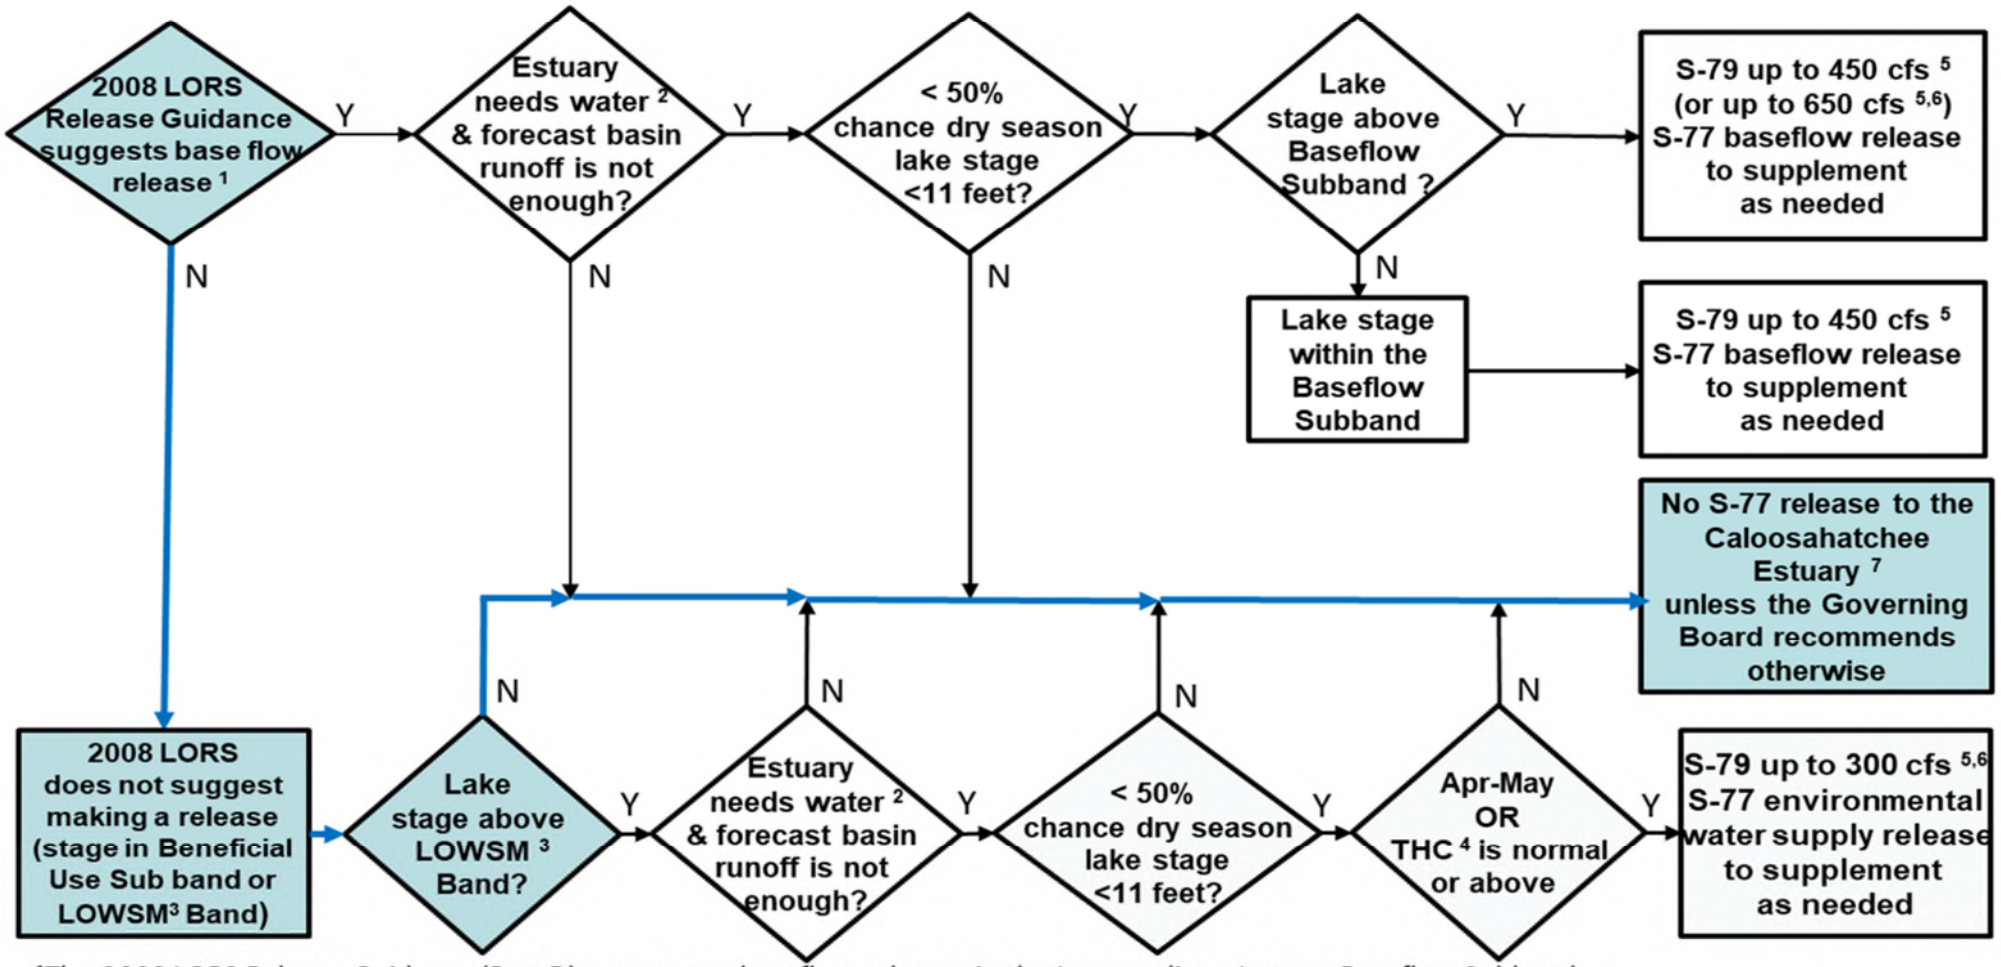

[1]The 2008 LORS Release Guidance (Part D) can suggest baseflow releases in the Intermediate, Low, or Baseflow Subbands.

[2]Estuary "needs" water when the 30-day moving average salinity at I-75 bridge is projected to exceed 5 practical salinity units (psu) within 2 weeks.

[3]LOWSM = Lake Okeechobee Water Shortage Management.

[4]Tributary Hydrologic Condition (THC) is based on classification of Lake Okeechobee Net Inflow and Palmer Index.

[5]Can release less than the "up to" limit if lower release is sufficient to reach or sustain desired estuary salinity; cfs = cubic feet per second.

[6]After reviewing conditions in Water Conservation Areas (WCAs), Stormwater Treatment Areas (STAs), ENP, St. Lucie Estuary and Lake Okeechobee.

[7]Should this condition be reached, the Governing Board will be briefed at their next regularly scheduled meeting as part of the State of the Water Resources agenda item.

Lake Okeechobee Water Level History and Projected Stages

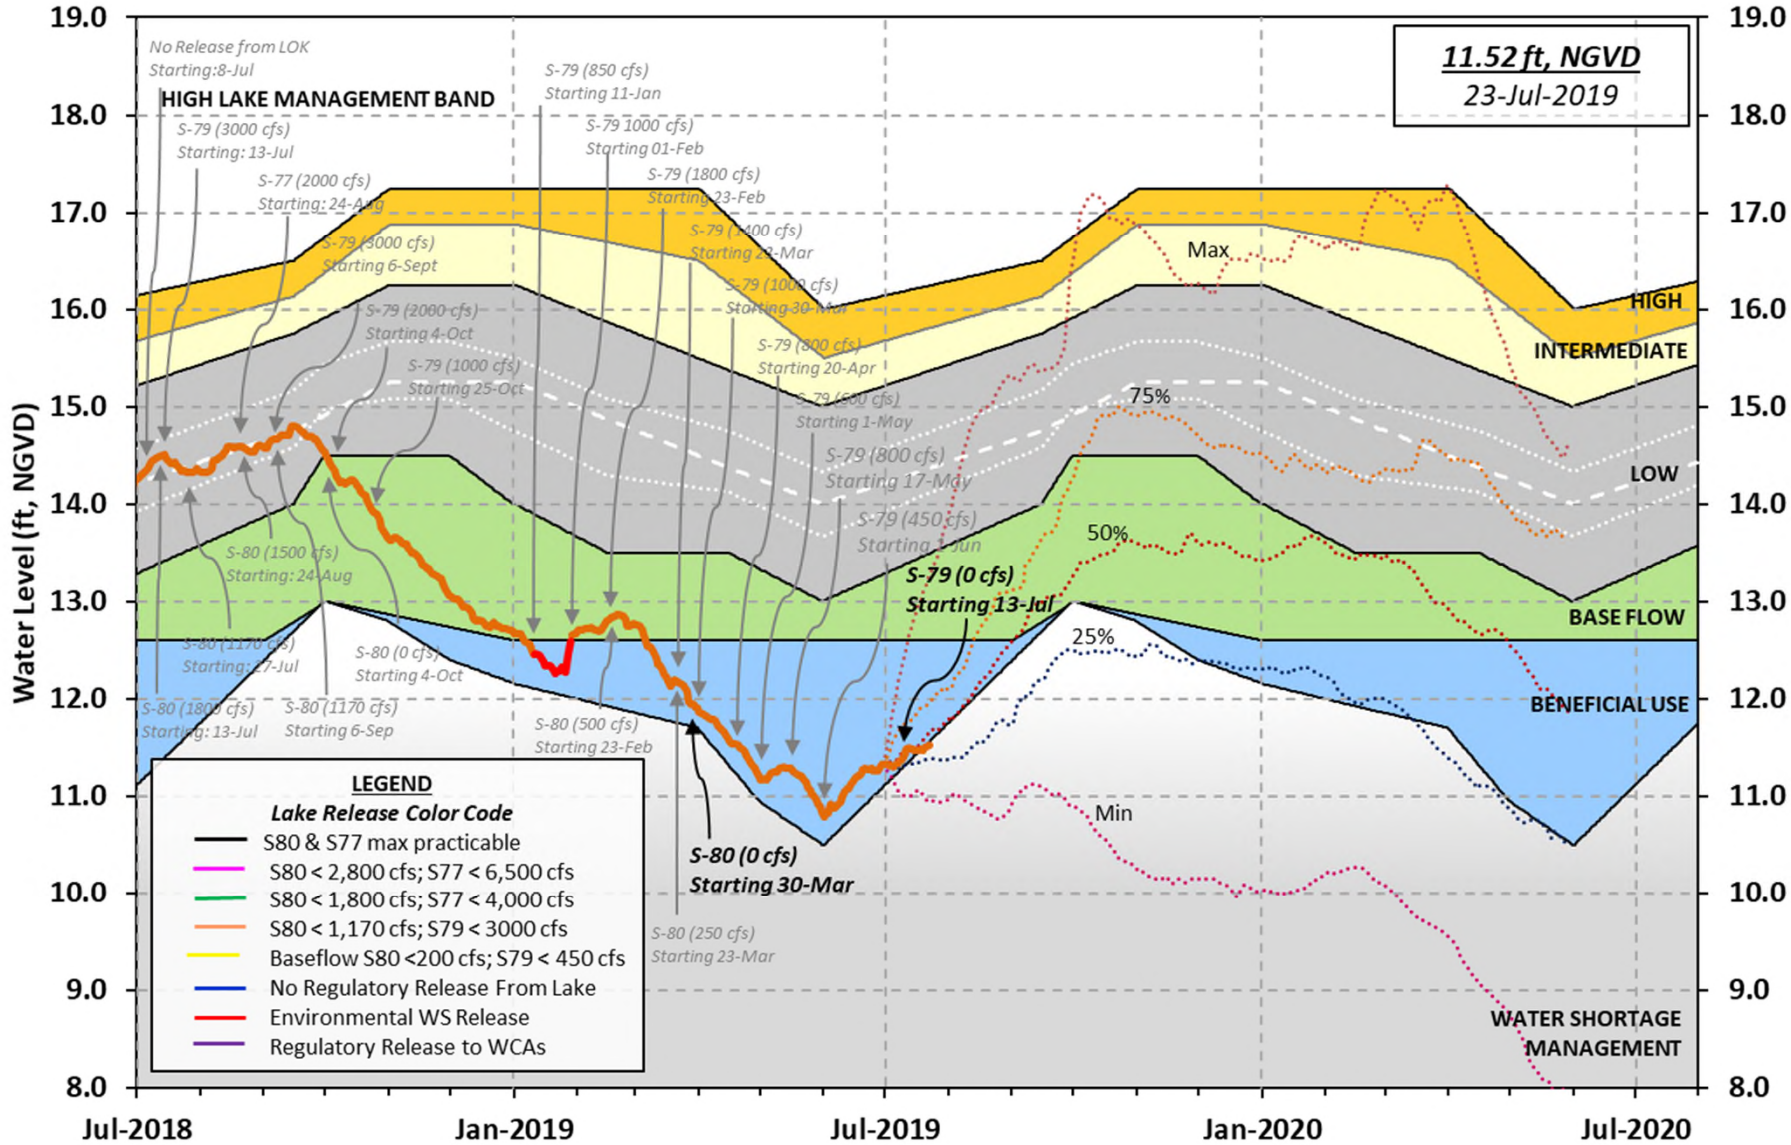

LORS-2008
Adopted by USACE 28-April-2008

Projected Stage Percentiles From
SFWMD-HESM Position Analysis

U. S. Army Corps of Engineers, Jacksonville District
Lake Okeechobee and Vicinity Report
** Preliminary Data - Subject to Revision **

Data Ending 2400 hours 21 JUL 2019

Okeechobee Lake Regulation	Elevation (ft-NGVD)	Last Year (ft-NGVD)	2YRS Ago (ft-NGVD)
*Okeechobee Lake Elevation	11.51	14.37	-NR- (Official Elv)

Bottom of High Lake Mngmt= 16.24 Top of Water Short Mngmt= 11.53
Currently in Water Shortage Management Band

Simulated Average LORS2008 [1965-2000] 12.55
Difference from Average LORS2008 -1.04

21JUL (1965-2007) Period of Record Average 13.65
Difference from POR Average -2.14

Today Lake Okeechobee elevation is determined from the 4 Int & 4 Edge stations

++Navigation Depth (Based on 2007 Channel Condition Survey) Route 1 ÷ 5.45'
++Navigation Depth (Based on 2008 Channel Condition Survey) Route 2 ÷ 3.65'
Bridge Clearance = 49.89'

---

4 Interior and 4 Edge Okeechobee Lake Average (Avg-Daily values):

L001	L005	L006	LZ40	S4	S352	S308	S133
11.46	11.74	11.49	11.48	11.50	-NR-	11.44	11.44

*Combination Okeechobee Avg-Daily Lake Average = 11.51 (*See Note)

Okeechobee Inflows (cfs):

S65E	582	S65EX1	593	Fisheating Cr	116
S154	0	S191	0	S135 Pumps	0
S84	100	S133 Pumps	0	S2 Pumps	0
S84X	0	S127 Pumps	0	S3 Pumps	0
S71	0	S129 Pumps	0	S4 Pumps	0
S72	0	S131 Pumps	0	C5	0

Total Inflows: 1391

Okeechobee Outflows (cfs):

S135 Culverts	0	S354	0	S77	65
S127 Culverts	0	S351	0	S308	-NR-
S129 Culverts	0	S352	0		
S131 Culverts	0	L8 Canal Pt	-20		

Total Outflows: No Report Due To Missing S77 or S308 Discharge Data

****S77 structure flow is being used to compute Total Outflow.
****S308 structure flow is being used to compute Total Outflow.

Okeechobee Pan Evaporation (inches):
S77 0.00 S308 0.17
Average Pan Evap x 0.75 Pan Coefficient = 0.06" = 0.01'

Lake Average Precipitation using NEXRAD: = -NR-" = -NR-'

Evaporation - Precipitation: = -NR-" = -NR-'
Evaporation - Precipitation using Lake Area of 730 square miles
is equal to -NR-
Lake Okeechobee (Change in Storage) Flow is 1815 cfs or 3600 AC-FT

	Headwater Elevation (ft-msl)	Tailwater Elevation (ft-msl)	Disch (cfs)	Gate Positions #1 (ft)	#2 (ft)	#3 (ft)	#4 (ft)	#5 (ft)	#6 (ft)	#7 (ft)	#8 (ft)
			(I) see note at bottom								
North East Shore											
S133 Pumps:	13.33	11.36	0	0	0	0	0	0	(cfs)		
S193:											
S191:	18.75	11.37	0	0.0	0.0	0.0					
S135 Pumps:	13.46	11.40	0	0	0	0	0		(cfs)		
S135 Culverts:			0	0.0	0.0						
North West Shore											
S65E:	21.16	11.47	582	0.0	0.0	0.0	0.0	0.5	0.5		
S65EX1:	21.16	11.47	593								
S127 Pumps:	13.30	11.33	0	0	0	0	0	0	(cfs)		
S127 Culvert:			0	0.0							
S129 Pumps:	12.72	12.42	0	0	0	0			(cfs)		
S129 Culvert:			0	0.0							
S131 Pumps:	12.77	11.48	0	0	0				(cfs)		
S131 Culvert:			0								
Fisheating Creek nr Palmdale		31.05	116								
nr Lakeport C5:		-NR-	0	-NR-	-NR-	-NR-					
South Shore											
S4 Pumps:	11.54	11.53	0	0	0	0			(cfs)		
S169:	11.57	11.56	8	5.0	4.9	4.9					
S310:	11.48		-4								

```
  S3 Pumps:    11.35     11.67       0      0    0    0            (cfs)
  S354:        11.67     11.35       0    0.0  0.0
  S2 Pumps:    10.77      -NR-       0   -NR- -NR- -NR- -NR-       (cfs)
  S351:         -NR-     10.77       0    0.0  0.0  0.0
  S352:       ______     10.96       0    0.0  0.0
  C10A:         -NR-     11.74            8.0   8.0   8.0   0.0   0.0
  L8 Canal PT            11.55     -20
```

S351 and S352 Temporary Pumps/S354 Spillway

```
  S351:        10.77      -NR-       0  -NR--NR--NR--NR--NR--NR-
  S352:        10.96     ______      0  -NR--NR--NR--NR-
  S354:        11.35     11.67       0  -NR--NR--NR--NR-
```

```
Caloosahatchee River (S77, S78, S79)
  S47B:        11.45     11.39            0.0  0.0
  S47D:        11.46     11.46     -32    5.2
  S77:
    Spillway and Sector Preferred Flow:
                11.22     11.31      65  0.0  0.0  0.0  0.0
    Flow Due to Lockages+:             0

  S78:
    Spillway and Sector Flow:
                11.28      2.96     204    1.0  0.0  0.0  0.0
    Flow Due to Lockages+:             7

  S79:
    Spillway and Sector Flow:
                 3.22      1.36    1008    0.0  0.0  1.0  1.0  1.0  1.0  0.0
0.0
    Flow Due to Lockages+:             9
    Percent of flow from S77           6%
    Chloride             (ppm)     48


St. Lucie Canal (S308, S80)
  S308:
    Spillway and Sector Preferred Flow:
                11.49     13.61       0  0.0  0.0  0.0  0.0
    Flow Due to Lockages+:         -NR-

  S153:        18.68     13.45      55    0.0  0.0
  S80:
    Spillway and Sector Flow:
                13.72      0.35       0    0.0  0.0  0.0  0.0  0.0  0.0  0.0
    Flow Due to Lockages+:         -NR-
    Percent of flow from S308    NA  %

  Steele Point Top Salinity    (mg/ml)   -N
  Steele Point Bottom Salinity (mg/ml)   -N

  Speedy Point Top Salinity    (mg/ml) ****
  Speedy Point Bottom Salinity (mg/ml) ****
```

+ Flow Due to lockages is computed utilizing average daily headwater and tailwater along with total number of lockages for the day to calculate a volume which is then converted to an average discharge in cfs.
++ Preferred flow is determined from either the spillway discharge or the below flow meter daily

---

Daily Precipitation Totals	1-Day (inches)	3-Day (inches)	7-Day (inches)	Wind Direction (Degø)	Wind Speed (mph)
S133 Pump Station:	-NR-	0.00	0.00		
S193:	-NR-	0.00	0.00	-NR-	-NR-
Okeechobee Field Station:	-NR-	0.00	0.00		
S135 Pump Station:	-NR-	0.00	0.00		
S127 Pump Station:	-NR-	0.00	0.00		
S129 Pump Station:	-NR-	0.00	0.00		
S131 Pump Station:	-NR-	0.00	0.00		
S77:	20.92	20.93	21.27	307	1
S78:	14.20	14.22	14.23	106	2
S79:	21.26	21.44	22.02	41	3
S4 Pump Station:	-NR-	0.00	0.00		
Clewiston Field Station:	-NR-	0.00	0.00		
S3 Pump Station:	-NR-	0.00	0.00		
S2 Pump Station:	-NR-	0.00	0.00		
S308:	19.43	19.83	21.25	60	2
S80:	14.31	14.32	14.48	291	2
Okeechobee Average (Sites S78, S79 and S80 not included)	20.17	3.14	3.27		
Oke Nexrad Basin Avg	-NR-	0.00	0.00		

Okeechobee Lake Elevations			21 JUL 2019	11.51 Difference from 21JUL19
21JUL19	-1 Day =		20 JUL 2019	11.50	-0.01
21JUL19	-2 Days =		19 JUL 2019	11.47	-0.04
21JUL19	-3 Days =		18 JUL 2019	11.48	-0.03
21JUL19	-4 Days =		17 JUL 2019	11.47	-0.04
21JUL19	-5 Days =		16 JUL 2019	11.47	-0.04
21JUL19	-6 Days =		15 JUL 2019	11.47	-0.04
21JUL19	-7 Days =		14 JUL 2019	11.48	-0.03
21JUL19	-30 Days =		21 JUN 2019	11.28	-0.23
21JUL19	-1 Year =		21 JUL 2018	14.37	2.86
21JUL19	-2 Year =		21 JUL 2017	-NR-	-NR-

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = 4.46

Lake Okeechobee Net Inflow (LONIN)

Average Flow over the previous 14 days	Avg-Daily Flow

21JUL19	Today =	21 JUL 2019	2343	MON	1880
21JUL19	-1 Day =	20 JUL 2019	2461	SUN	5510
21JUL19	-2 Days =	19 JUL 2019	2332	SAT	-1745
21JUL19	-3 Days =	18 JUL 2019	2380	FRI	2241
21JUL19	-4 Days =	17 JUL 2019	2289	THU	1430
21JUL19	-5 Days =	16 JUL 2019	2140	WED	198
21JUL19	-6 Days =	15 JUL 2019	2173	TUE	-1815
21JUL19	-7 Days =	14 JUL 2019	2184	MON	0
21JUL19	-8 Days =	13 JUL 2019	2325	SUN	-3630
21JUL19	-9 Days =	12 JUL 2019	3114	SAT	3630
21JUL19	-10 Days =	11 JUL 2019	3202	FRI	14520
21JUL19	-11 Days =	10 JUL 2019	2228	THU	3529
21JUL19	-12 Days =	09 JUL 2019	1981	WED	3529
21JUL19	-13 Days =	08 JUL 2019	1473	TUE	3529

S65E

		Average Flow over previous 14 days			Avg-Daily Flow
21JUL19	Today=	21 JUL 2019	779	MON	677
21JUL19	-1 Day =	20 JUL 2019	772	SUN	757
21JUL19	-2 Days =	19 JUL 2019	759	SAT	760
21JUL19	-3 Days =	18 JUL 2019	753	FRI	758
21JUL19	-4 Days =	17 JUL 2019	761	THU	768
21JUL19	-5 Days =	16 JUL 2019	786	WED	974
21JUL19	-6 Days =	15 JUL 2019	792	TUE	931
21JUL19	-7 Days =	14 JUL 2019	791	MON	922
21JUL19	-8 Days =	13 JUL 2019	818	SUN	764
21JUL19	-9 Days =	12 JUL 2019	841	SAT	876
21JUL19	-10 Days =	11 JUL 2019	890	FRI	769
21JUL19	-11 Days =	10 JUL 2019	947	THU	836
21JUL19	-12 Days =	09 JUL 2019	990	WED	562
21JUL19	-13 Days =	08 JUL 2019	1035	TUE	552

S65EX1

		Average Flow over previous 14 days			Avg-Daily Flow
21JUL19	Today=	21 JUL 2019	424	MON	593
21JUL19	-1 Day =	20 JUL 2019	405	SUN	670
21JUL19	-2 Days =	19 JUL 2019	376	SAT	673
21JUL19	-3 Days =	18 JUL 2019	356	FRI	671
21JUL19	-4 Days =	17 JUL 2019	332	THU	494
21JUL19	-5 Days =	16 JUL 2019	325	WED	417
21JUL19	-6 Days =	15 JUL 2019	344	TUE	363
21JUL19	-7 Days =	14 JUL 2019	372	MON	382
21JUL19	-8 Days =	13 JUL 2019	398	SUN	297
21JUL19	-9 Days =	12 JUL 2019	429	SAT	317
21JUL19	-10 Days =	11 JUL 2019	441	FRI	221
21JUL19	-11 Days =	10 JUL 2019	446	THU	307
21JUL19	-12 Days =	09 JUL 2019	451	WED	272
21JUL19	-13 Days =	08 JUL 2019	462	TUE	262

Lake Okeechobee Outlets Last 14 Days

DATE	S-77 Discharge (ALL DAY) (AC-FT)	Below S-77 Discharge (ALL-DAY) (AC-FT)	S-78 Discharge (ALL DAY) (AC-FT)	S-79 Discharge (ALL DAY) (AC-FT)
21 JUL 2019	118	310	424	2018
20 JUL 2019	119	313	306	2220
19 JUL 2019	128	256	309	2207
18 JUL 2019	144	295	301	2862
17 JUL 2019	129	400	453	3039
16 JUL 2019	1	37	860	3668
15 JUL 2019	1	-183	1277	3355
14 JUL 2019	1	182	1645	5855
13 JUL 2019	0	545	2109	4364
12 JUL 2019	0	52	1750	6599
11 JUL 2019	0	100	1968	3613
10 JUL 2019	-0	164	2558	6143
09 JUL 2019	-0	153	1718	5059
08 JUL 2019	0	89	1167	3909

DATE	S-310 Discharge (ALL DAY) (AC-FT)	S-351 Discharge (ALL DAY) (AC-FT)	S-352 Discharge (ALL DAY) (AC-FT)	S-354 Discharge (ALL DAY) (AC-FT)	L8 Canal Pt Discharge (ALL DAY) (AC-FT)
21 JUL 2019	-7	0	0	0	-40
20 JUL 2019	-1	0	0	0	-39
19 JUL 2019	85	0	0	0	-8
18 JUL 2019	288	290	356	15	-0
17 JUL 2019	206	915	1020	706	4
16 JUL 2019	-8	0	393	0	-30
15 JUL 2019	-21	0	0	0	-87
14 JUL 2019	35	0	0	0	-96
13 JUL 2019	-166	0	0	0	-116
12 JUL 2019	-386	0	0	0	-55
11 JUL 2019	-248	0	0	0	-57
10 JUL 2019	-227	0	0	0	-109
09 JUL 2019	-312	0	0	0	-185
08 JUL 2019	-95	0	0	0	-110

DATE	S-308 Discharge (ALL DAY) (AC-FT)	Below S-308 Discharge (ALL-DAY) (AC-FT)	S-80 Discharge (ALL-DAY) (AC-FT)
21 JUL 2019	-NR-	-59	-NR-
20 JUL 2019	-7	-39	-NR-
19 JUL 2019	-6	-20	-NR-
18 JUL 2019	-5	-72	-NR-
17 JUL 2019	-2	15	-NR-
16 JUL 2019	-4	-73	-NR-
15 JUL 2019	-9	128	27
14 JUL 2019	-9	35	31
13 JUL 2019	-8	244	19
12 JUL 2019	-15	41	34
11 JUL 2019	-8	-78	-NR-
10 JUL 2019	-4	90	1650
09 JUL 2019	-10	-45	1351
08 JUL 2019	-6	-217	532

*** NOTE: Discharge (ALL DAY) is computed using Spillway, Sector Gate and
Lockages Discharges from 0015 hrs to 2400 hrs.

(I) - Flows preceeded by "I" signify an instantaneous
flow computed from the single value reported for the day

---

* On 11 May 1999, Lake Okeechobee Elevation was switched from
Instantaneous 2400 value to an average-daily lake average.
On 14 Mar 2001, due to the isolation of various gages within the standard
10 stations, the average of the interior 4 station gages was used
as the Lake Okeechobee Elevation.
On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage
mix of interior and edge gages to obtain a more reliable representation
of the lake level.
On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage
mix of interior and edge gages to obtain a more reliable representation
of the lake level due to isolation of S135 from low lake levels.
Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations
++ For more information see the Jacksonville District Navigation website
at http://www.saj.usace.army.mil/
$ For information regarding Lake Okeechobee Service Area water restrictions
please refer to www.sfwmd.gov

Report Generated 22JUL2019 @ 09:39 ** Preliminary Data - Subject to Revision **

Lake Okeechobee

22JUL19 09:30:23

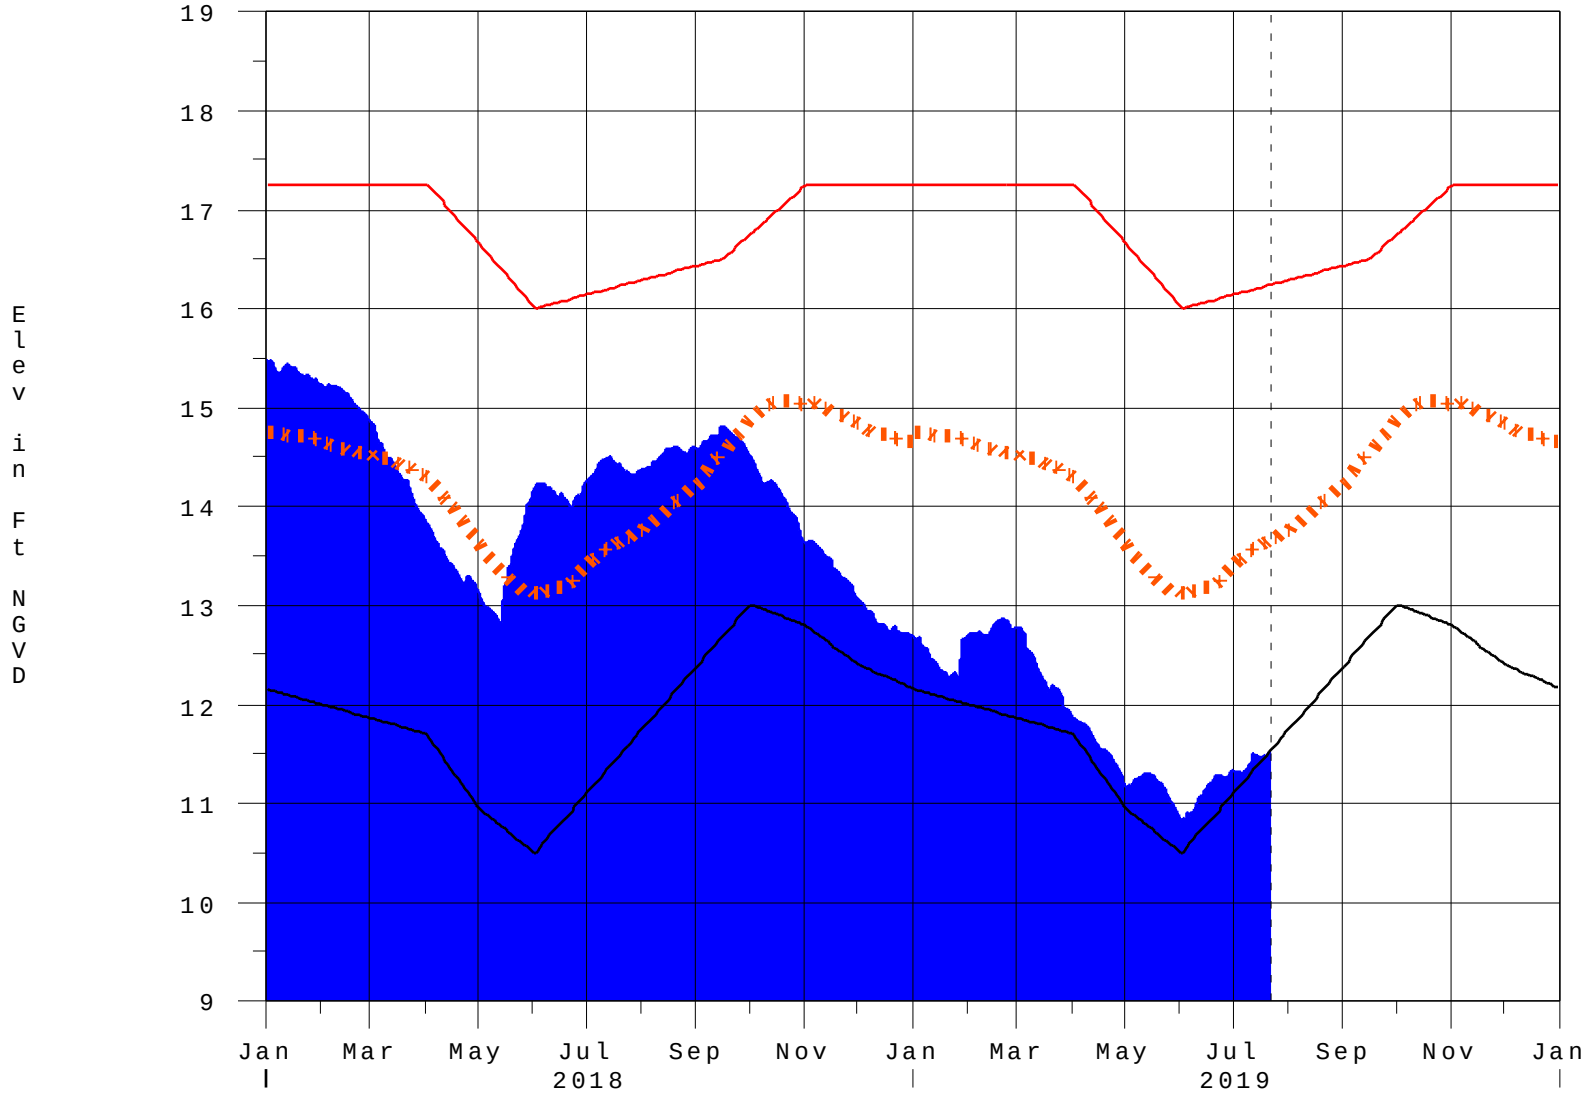

Classification Tables

Supplemental Tables used in conjunction with the LORS2008 Release

Guidance Flow Charts

- Class Limits for Tributary Hydrologic Conditions

Table K-2 in the Lake Okeechobee Water Control Plan

- 6-15 Day Precipitation Outlook Categories

Table ?? in the Lake Okeechobee Water Control Plan

- Classification of Lake Okeechobee Net Inflow for Seasonal Outlook

Table K-3 in the Lake Okeechobee Water Control Plan

- Classification of Lake Okeechobee Net Inflow for Multi-Seasonal Outlook

Table K-4 in the Lake Okeechobee Water Control Plan

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage

Tributary Hydrologic Classification*	Palmer Index Class Limits	2-wk Mean L.O. Net Inflow Class Limits
Very Wet	3.0 or greater	Greater >= 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

* use the wettest of the two indicators

Classification of Lake Okeechobee Net Inflow Seasonal Outlook*

Lake Net Inflow Prediction [million acre-feet]	Equivalent Depth** [feet]	Lake Okeechobee Net Inflow Seasonal Outlook
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

****Volume-depth conversion based on average lake surface area of 467,000 acres**

Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook*

Lake Net Inflow Prediction [million acre-feet]	**Equivalent Depth** [feet]**	**Lake Okeechobee Net Inflow Multi-Seasonal Outlook**
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

****Volume-depth conversion based on average lake surface area of 467,000 acres**

6-15 Day Precipitation Outlook Categories*

6-15 Day Precipitation Outlook Categories	WSE Decision Tree Categories
Above Normal	Wet to Very Wet
Normal	Normal
Below Normal	Dry

*** Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan**

Under Construction