

# Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 2/1/2016 (El Nino Condition)

## Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method<sup>1</sup>, the SFWMD empirical method<sup>2</sup>, a sub-sampling of El Nino years<sup>3</sup> and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with El Nino ENSO years<sup>4</sup>. The results for Croley's method and the SFWMD empirical method are based on the [CPC Outlook](#).

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season	Croley's Method <sup>1*</sup>		SFWMD Empirical Method <sup>2</sup>		Sub-sampling of El Nino ENSO Years <sup>3</sup>		Sub-sampling of AMO Warm + El Nino ENSO Years <sup>4</sup>	
	Value (ft)	<a href="#">Condition</a>	Value (ft)	<a href="#">Condition</a>	Value (ft)	<a href="#">Condition</a>	Value (ft)	<a href="#">Condition</a>
Current (Feb-Jul)	N/A	N/A	1.02	Normal	1.37	Normal	2.51	Very Wet
Multi Seasonal (Feb-Oct)	N/A	N/A	2.78	Wet	3.23	Wet	5.23	Very Wet

**\*Croley's Method Not Produced For This Report**

See [Seasonal](#) and [Multi-Seasonal](#) tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

## [Tributary Hydrologic Conditions Graph:](#)

**17902 cfs** 14-day running average for Lake Okeechobee Net Inflow through 2/1/2016. According to the classification in [Tributary Hydrologic Conditions](#) table, this condition is Very Wet.

**0.91** for Palmer Index on 1/31/2016.

According to the classification in [Tributary Hydrologic Conditions](#) table, this condition is Normal.

The wetter of the two conditions above is **Very Wet**.

## [LORS2008 Classification Tables:](#)

### Lake Okeechobee Stage on 2/1/2016

Lake Okeechobee Stage: **16.14 feet**

[USACE Report for Lake Okeechobee](#)

[Lake Okeechobee Stage Hydrograph](#)

Lake Okeechobee Management Zone/Band		Bottom Elevation (feet, NGVD)	Current Lake Stage
High Lake Management Band		17.25	
Operational Band	High sub-band	16.75	
	Intermediate sub-band	16.00	← 16.14
	Low sub-band	13.67	
Base Flow sub-band		12.60	
Beneficial Use sub-band		12.00	
Water Shortage Management Band			

**[Part C of LORS2008: Discharge to WCA's](#)**

Release Guidance Flow Chart Outcome: No Releases to the WCAs

**[Part D of LORS2008: Discharge to Tidewater](#)**

Release Guidance Flow Chart Outcome: S-77 up to 6500 cfs and S-80 up to 2800 cfs

**Technical Input Summaries from:**

- **[Lake Okeechobee Division](#)**
- **[Coastal Ecosystems](#)**
- **[Everglades Ecosystems Division](#)**
- **[Water Supply Department](#)**
- **[Water Resource Management Release Recommendation](#)**
- **[Kissimmee Watershed Environmental Conditions](#)**
- **[Operations Department](#)**

**[Back to Lake Okeechobee Operations Main Page](#)**

**[Back to U.S. Army Corps of Engineers LORSS Homepage](#)**

## LORS2008 Implementation on 2/1/2016 (ENSO El Nino Condition):

### Water Supply Department Technical Input

#### Water Supply Outlook:

District wide, Raindar rainfall 4.09 inches for the week ending 2/1/2016. Lake stage on 2/1/2016 is 16.14 ft, up 0.83 ft from last week.

The updated January 2016 SFWMM Dynamic Position Analysis [percentile graph](#) and [tracking chart](#) for Lake Okeechobee show that the lake stage is in the Intermediate Operational Sub-Band.

The LORS2008 tributary [indices](#) are classified as **Very Wet**. The PDSI indicates normal condition and the LONIN is Very Wet. The classification is based on the wetter of the two.

#### Water Supply Risk Evaluation


Area	Indicator	Value	Color Coded Scoring Scheme
LOK	Projected LOK Stage for the next two months	*Low Flow Sub-Band	M
	Palmer Index for LOK Tributary Conditions	0.91 (Normal)	L
	CPC Precipitation Outlook	1 month: Above Normal	L
		3 months: Above Normal	L
	LOK Seasonal Net Inflow Forecast AMO warm/El Nino	1.37 ft (Normal to Extremely Wet)	L
	LOK Multi-Seasonal Net Inflow Forecast AMO warm/El Nino	3.23 ft (Wet)	L
WCAs	WCA 1: Site 1-7, Site 1-8T, & Site 1-9 Average	Above Line 1 (17.34 ft)	L
	WCA 2A: Site 2-17 HW	Above Line1 (13.90 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64 and 65)	Above Line 1 (11.08 ft)	L
LEC	Service Area 1	Year-Round Irrigation Rule in effect	L
	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L

Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow forecasts use slightly different classification intervals than those used by the 2008-LORS for classifying the tributary hydrologic condition (THC).

[Back to Lake Okeechobee Operations Main Page](#)

[Back to U.S. Army Corps of Engineers LORSS Homepage](#)


# Lake Okeechobee SFWMM Jan 2016 Dynamic Position Analysis

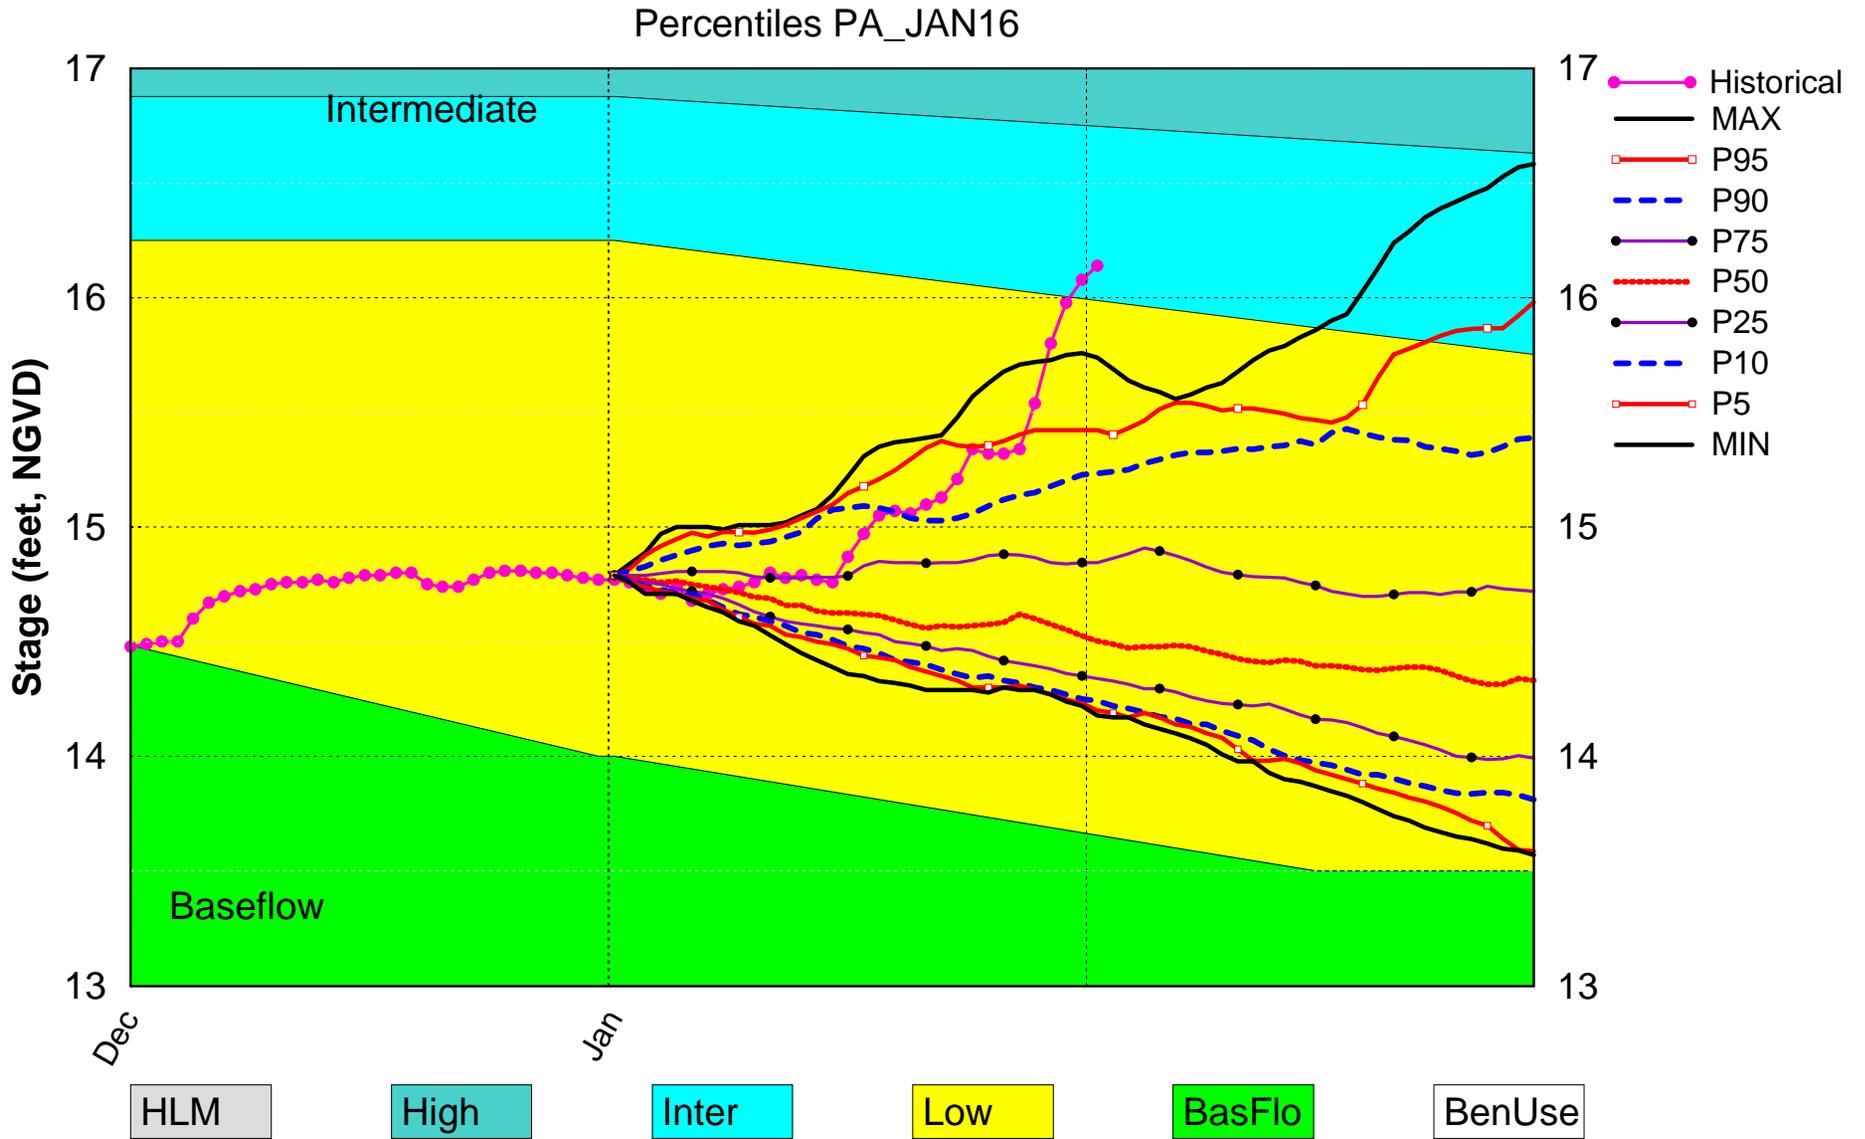


(See assumptions on the Position Analysis Results website)

# Tributary Basin Condition Indicators as of February 1 2016

## Palmer Index

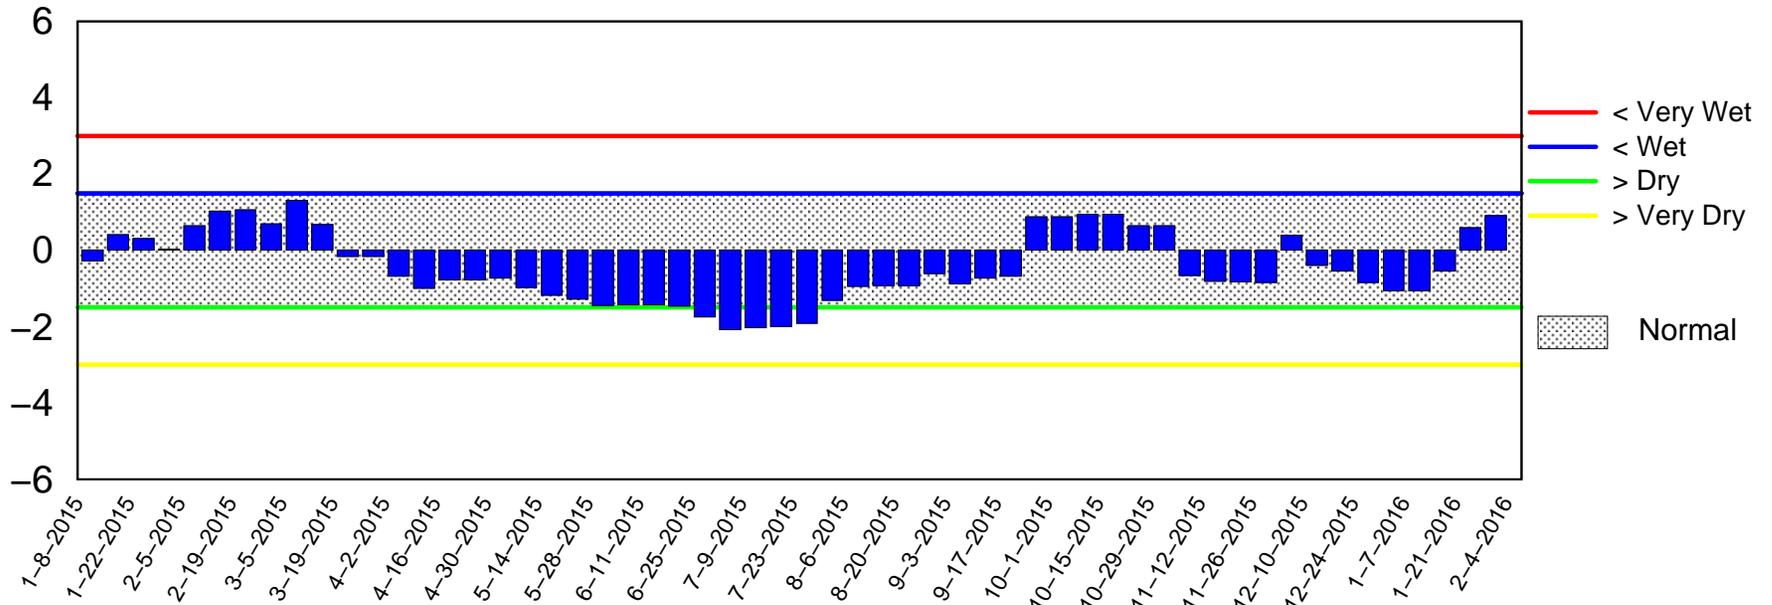

## Lake Okeechobee Net Inflow (LONIN) 14-day Running Average

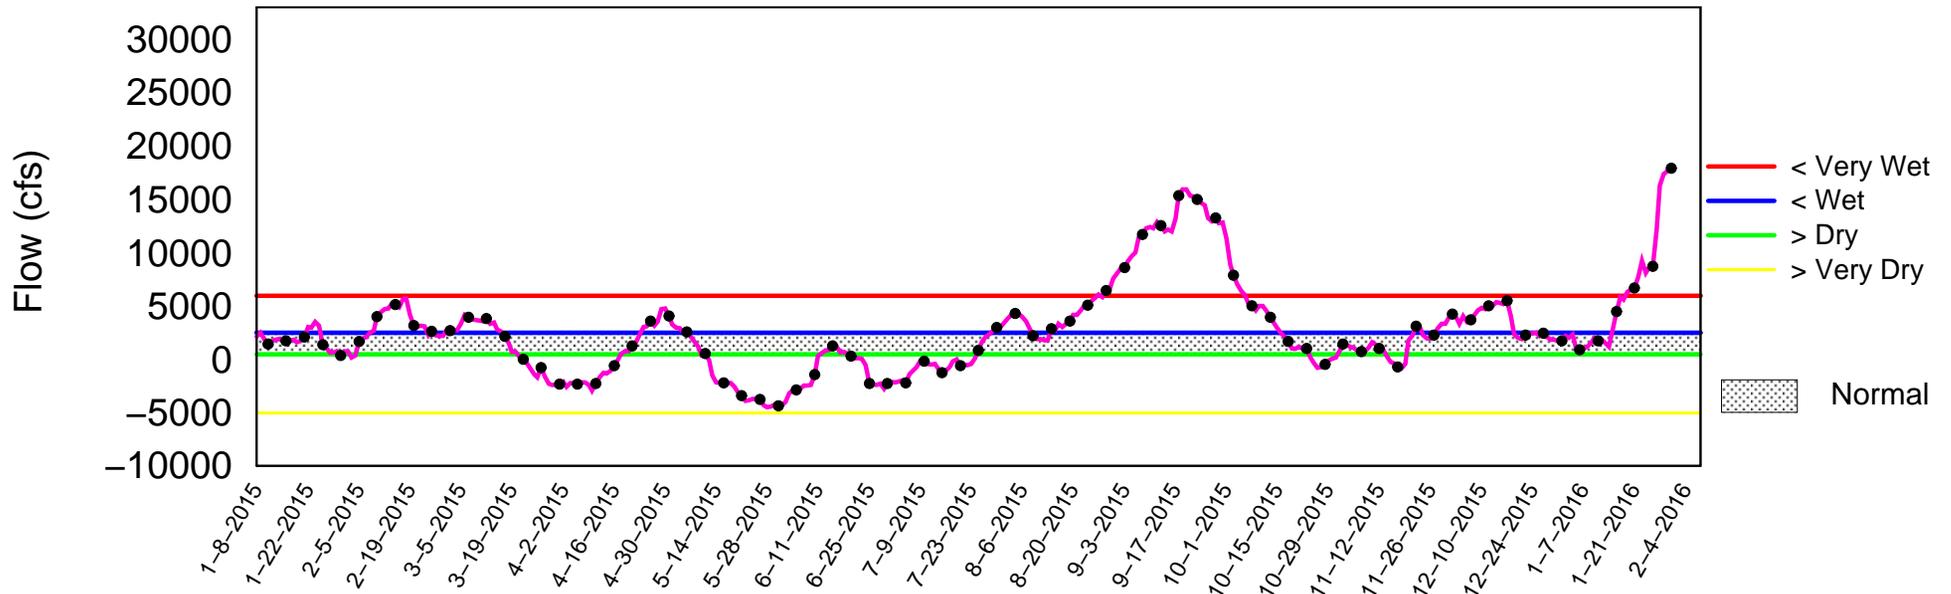

Mon Feb 01 16:15:55 EST 2016

# 2008 LORS

## Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

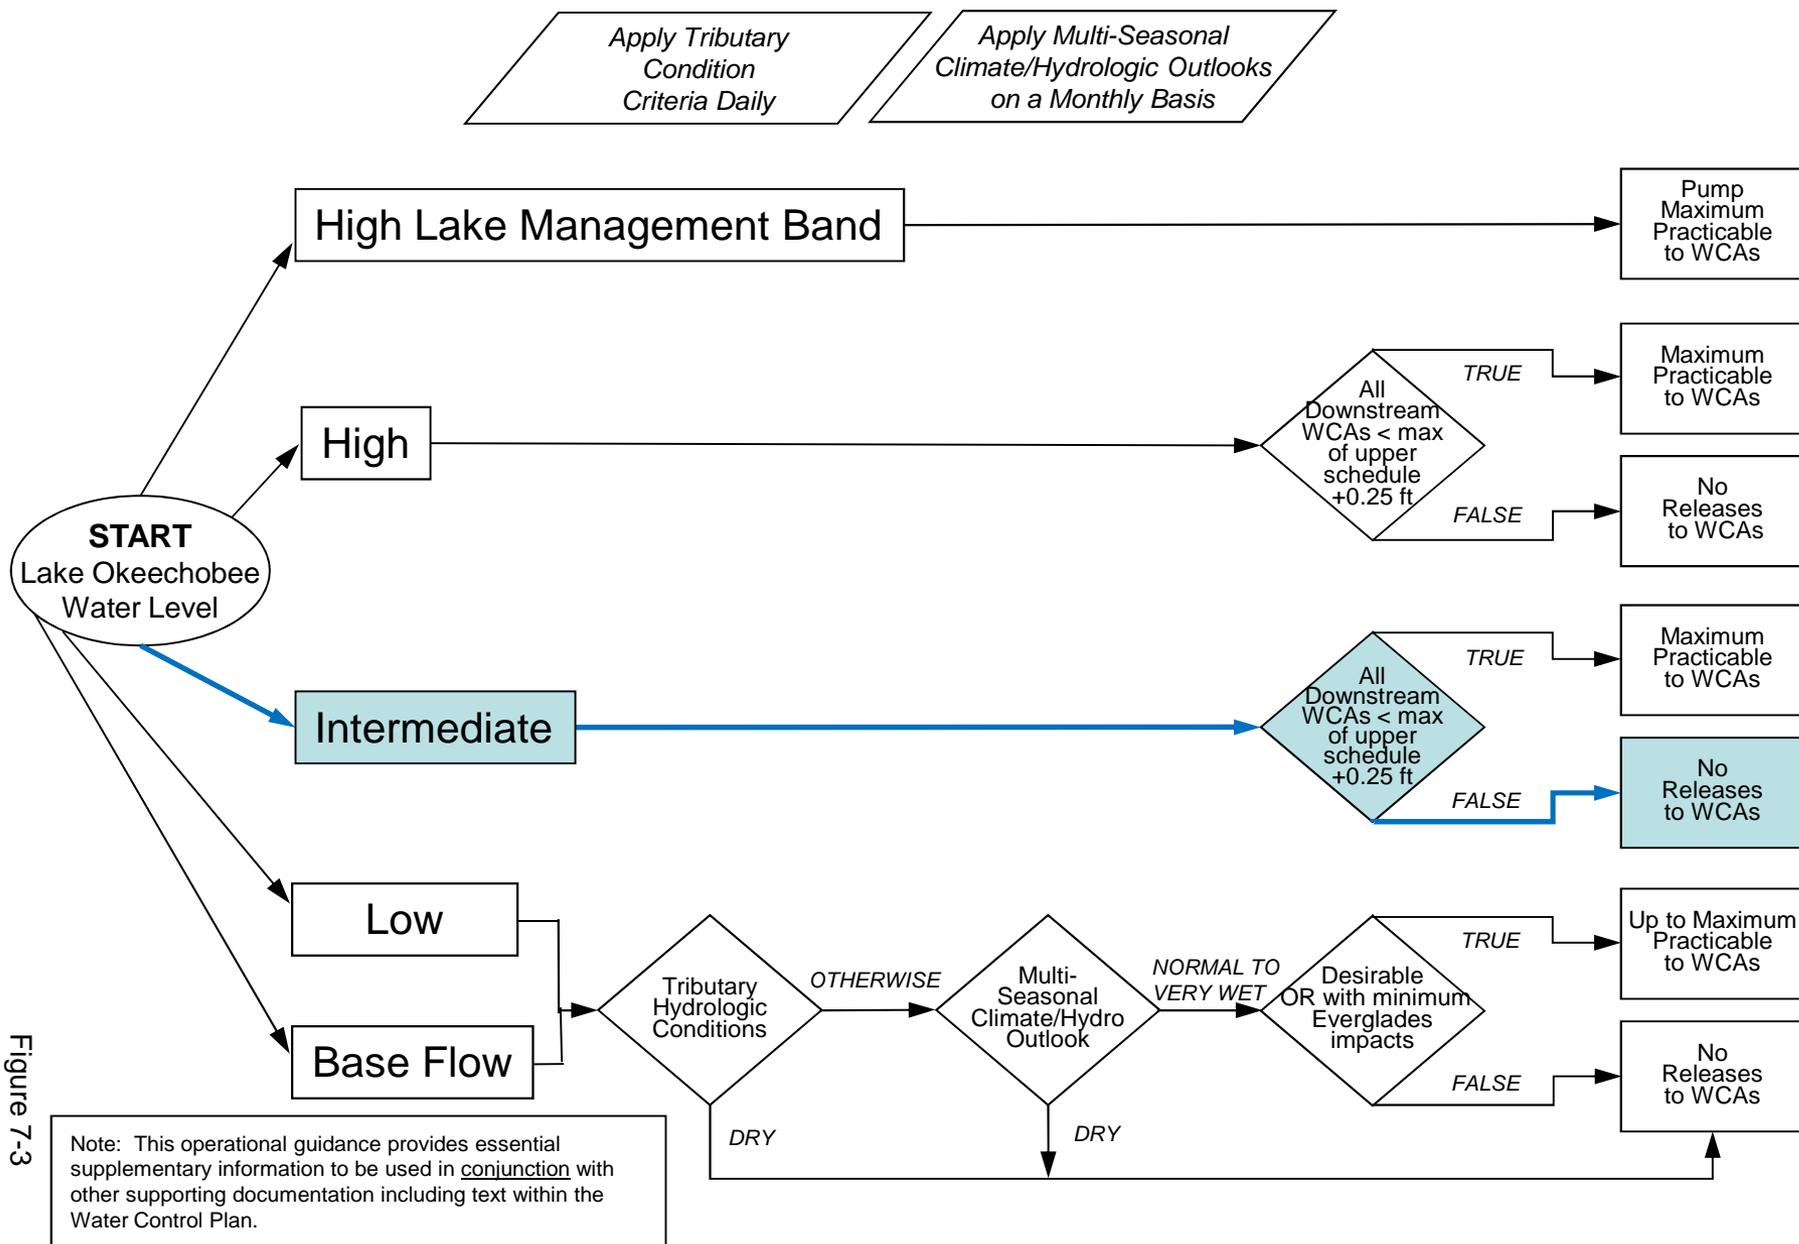


Figure 7-3


# 2008 LORS

## Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

Note: This operational guidance provides essential supplementary information to be used in conjunction with other supporting documentation including text within the Water Control Plan.

When conducting Base Flow releases, flows can be distributed East and West up to 650 cfs as needed to minimize impacts or provide benefits through S-80 and S-79

Apply Meteorological Forecasts on a Weekly Basis; apply Seasonal and Multi-Seasonal Climate/Hydrologic Outlooks on a Monthly Basis

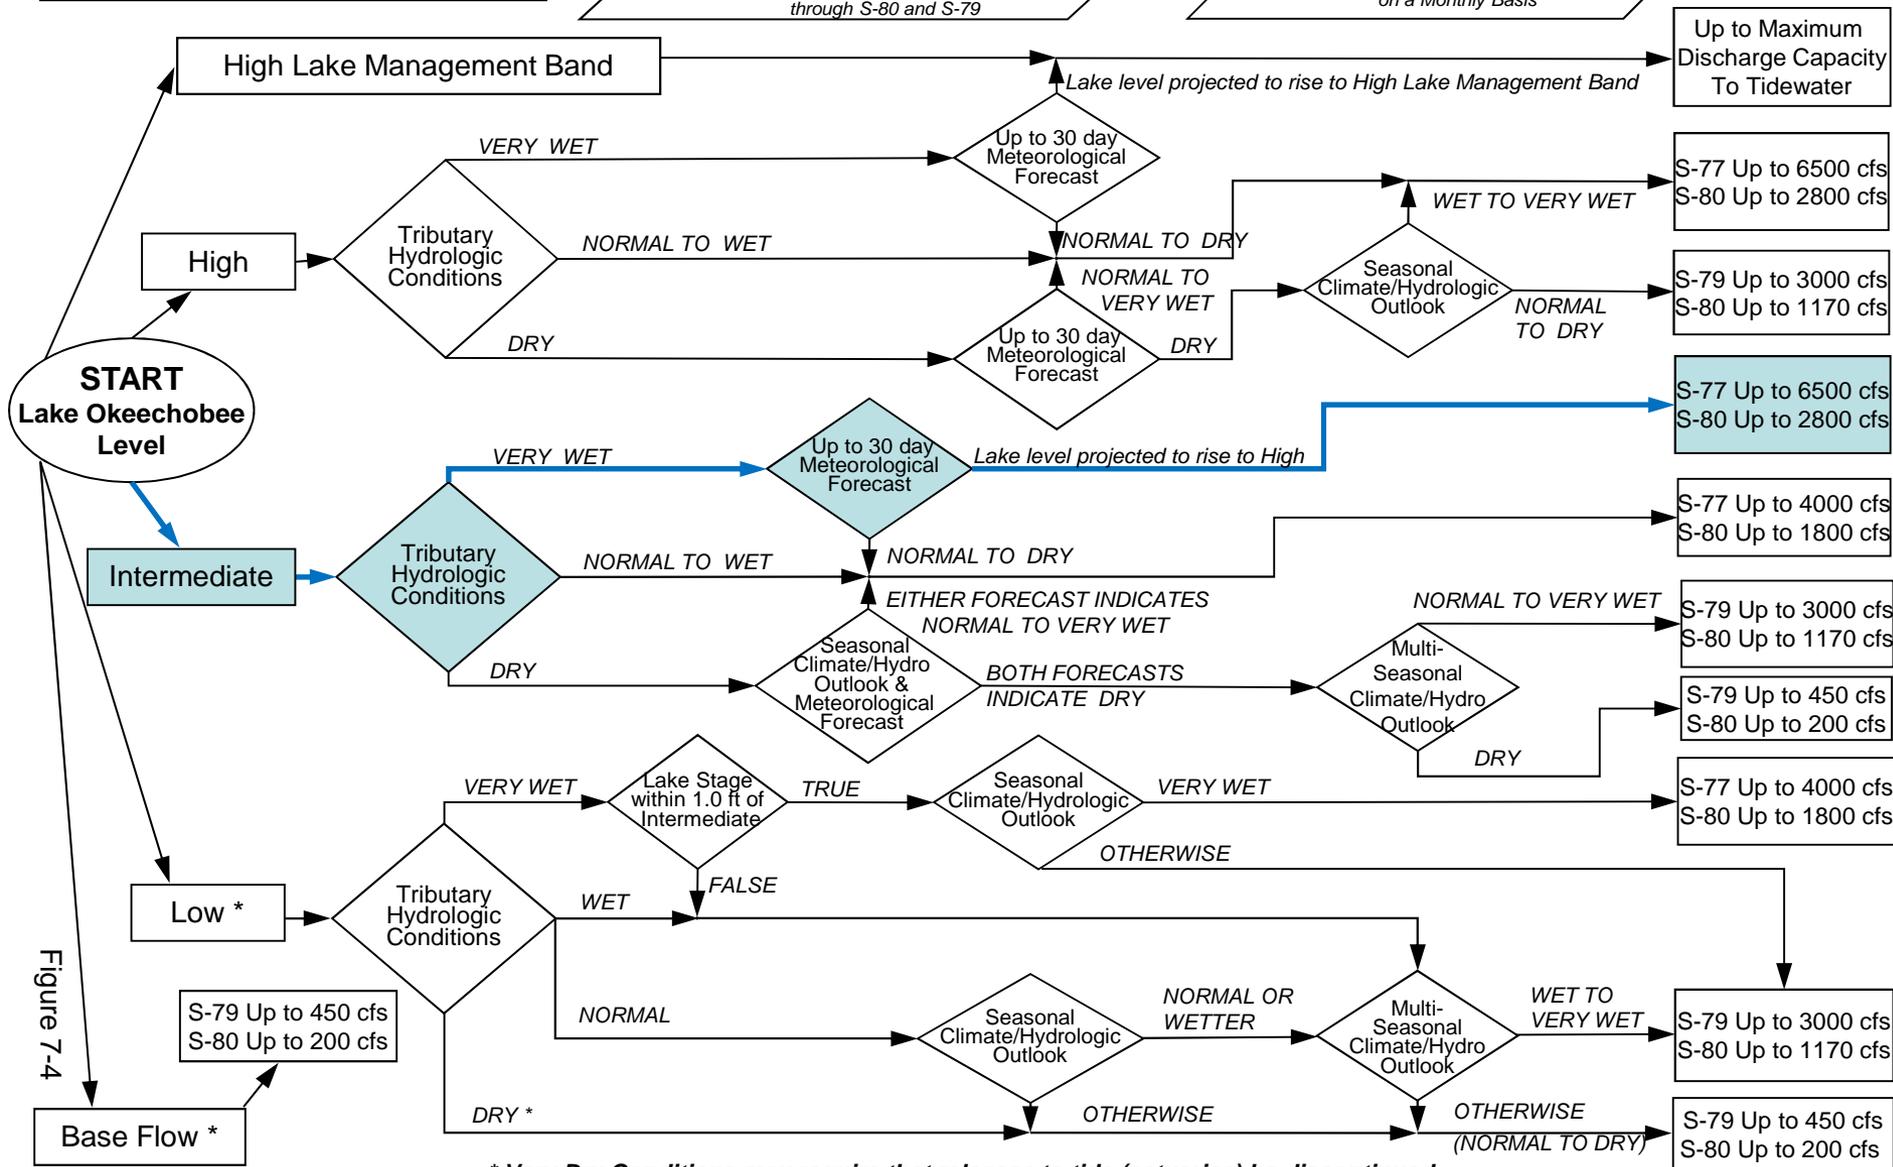

\* Very Dry Conditions may require that releases to tide (estuaries) be discontinued

Figure 7-4

# 2008 LORS FORECAST

## Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

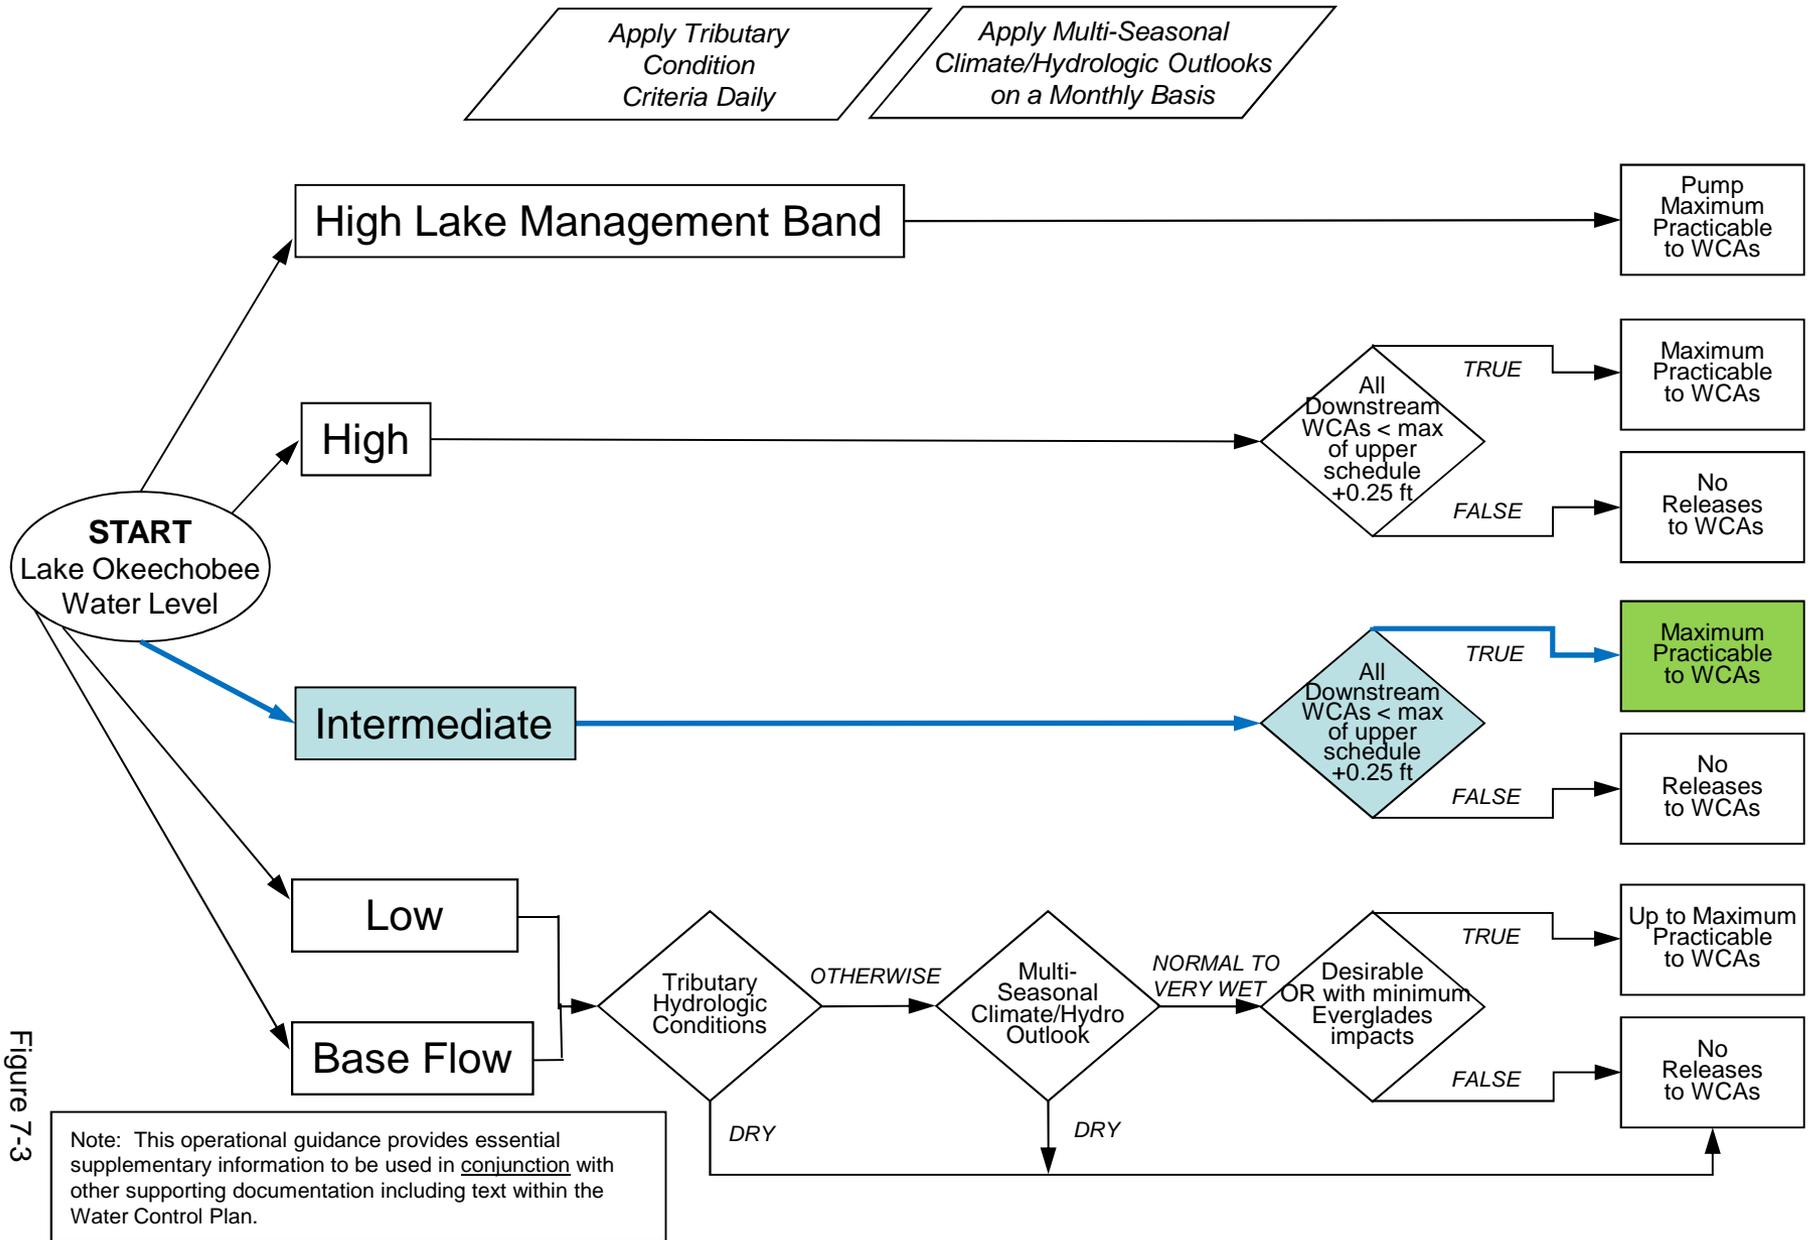


Figure 7-3


# 2008 LORS FORECAST

## Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

Note: This operational guidance provides essential supplementary information to be used in conjunction with other supporting documentation including text within the Water Control Plan.

When conducting Base Flow releases, flows can be distributed East and West up to 650 cfs as needed to minimize impacts or provide benefits through S-80 and S-79


Apply Meteorological Forecasts on a Weekly Basis; apply Seasonal and Multi-Seasonal Climate/Hydrologic Outlooks on a Monthly Basis

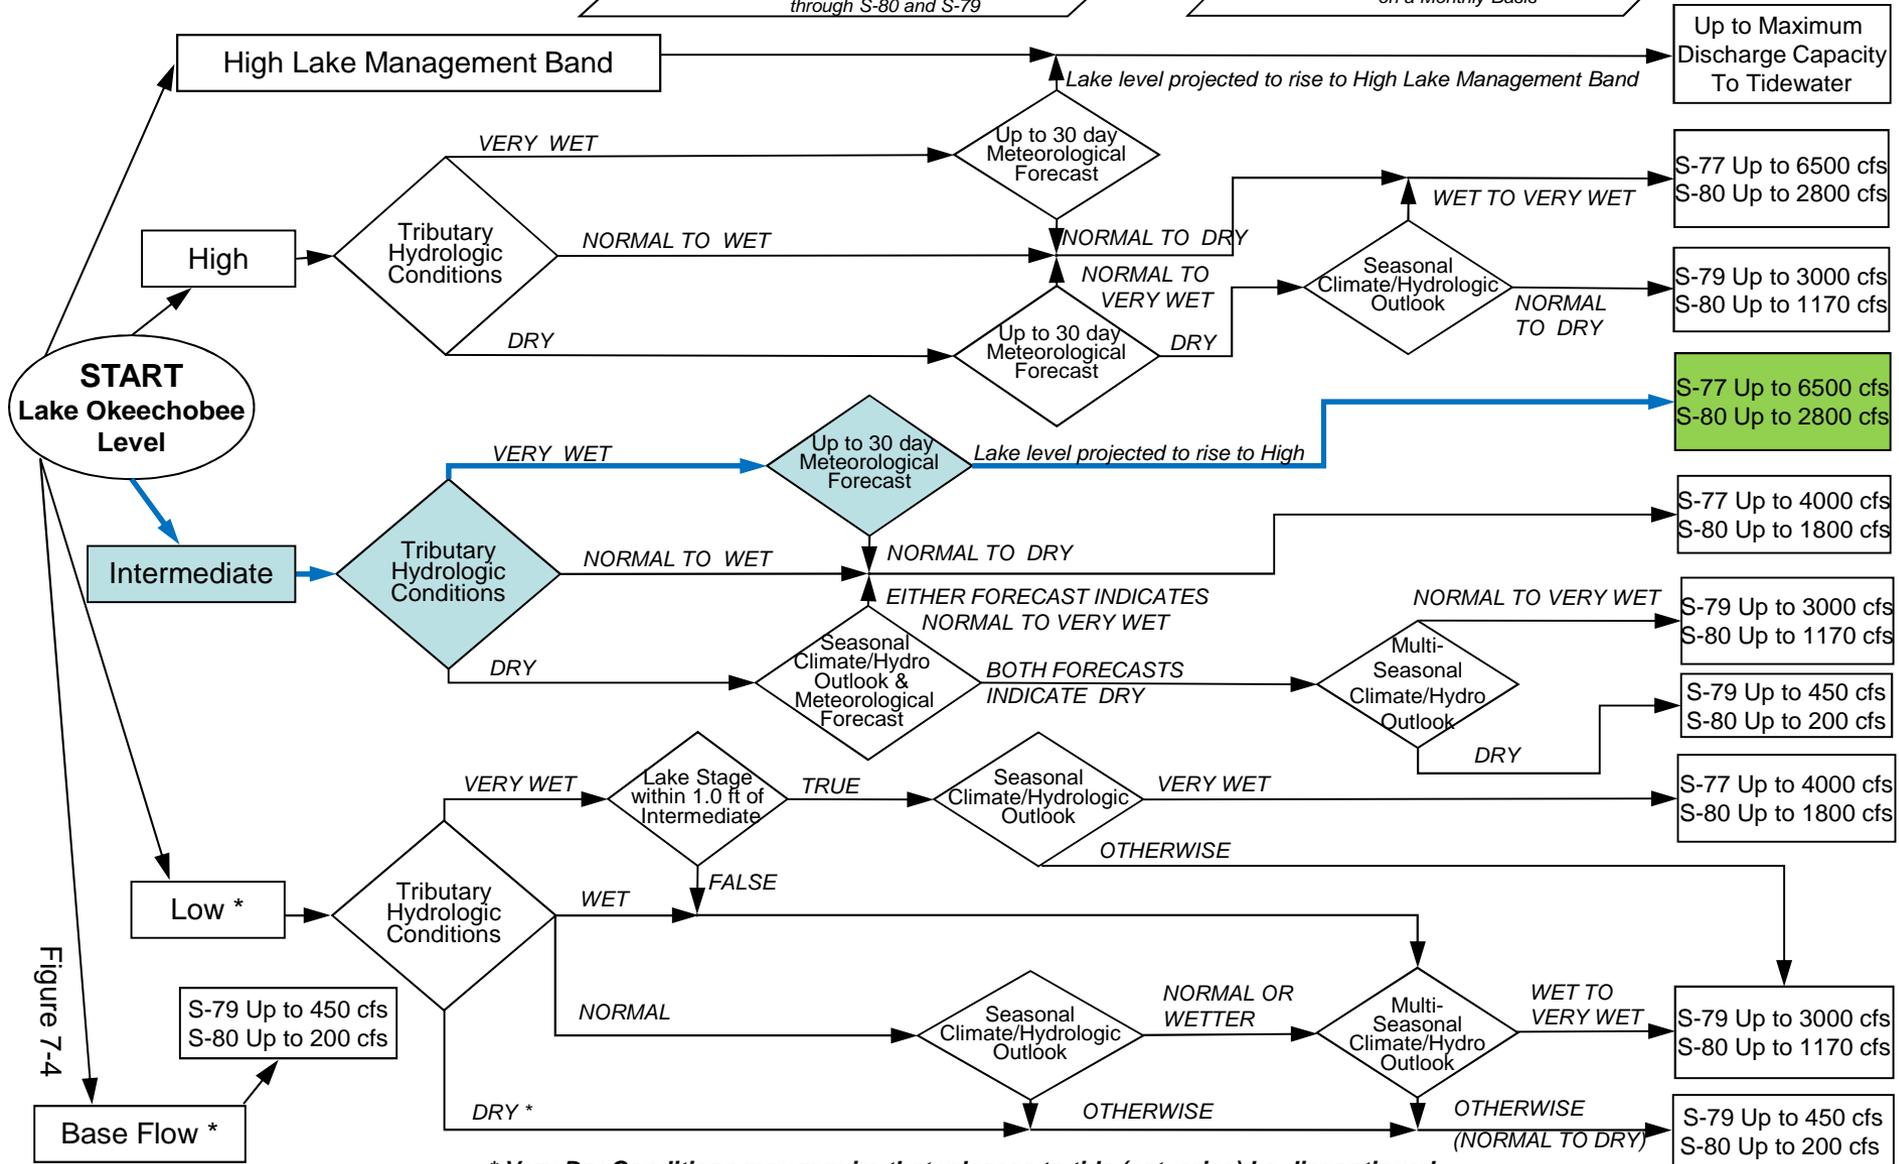

\* Very Dry Conditions may require that releases to tide (estuaries) be discontinued

Figure 7-4

# Lake Okeechobee Water Level History and Projected Stages

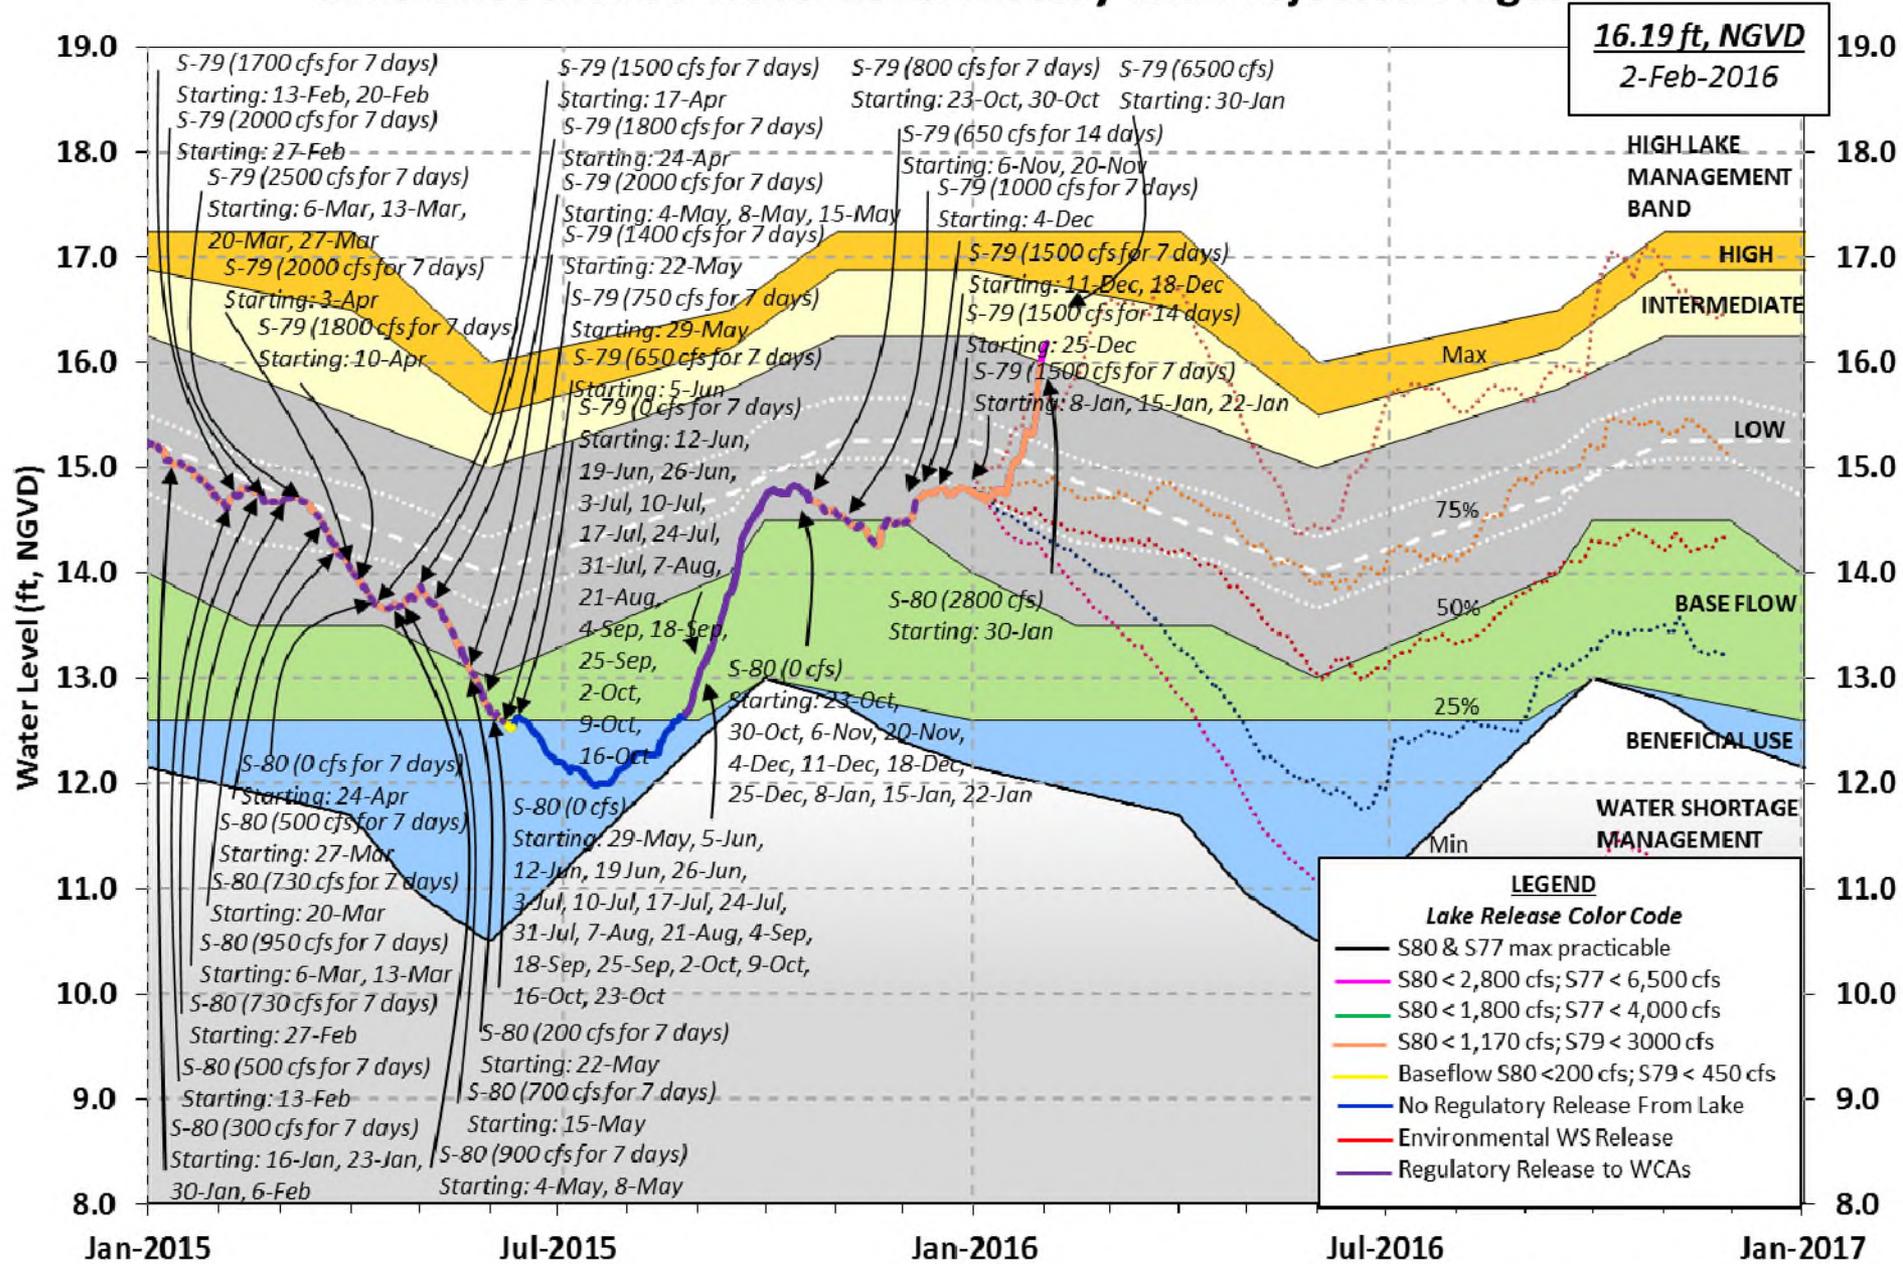

U. S. Army Corps of Engineers, Jacksonville District  
 Lake Okeechobee and Vicinity Report  
 \*\* Preliminary Data - Subject to Revision \*\*

Data Ending 2400 hours 31 JAN 2016

Okeechobee Lake Regulation	Elevation	Last Year	2YRS Ago
	(ft-NGVD)	(ft-NGVD)	(ft-NGVD)
*Okeechobee Lake Elevation	16.14	14.68	13.93 (Official Elv)
Bottom of High Lake Mngmt=	17.25	Top of Water Short Mngmt=	12.00
Currently in Operational Management Band			
Simulated Average LORS2008 [1965-2000]		13.51	
Difference from Average LORS2008		2.63	
31JAN (1965-2007) Period of Record Average		14.65	
Difference from POR Average		1.49	

Today Lake Okeechobee elevation is determined from the 4 Int & 4 Edge stations

++Navigation Depth (Based on 2007 Channel Condition Survey) Route 1 ÷ 10.08'  
 ++Navigation Depth (Based on 2008 Channel Condition Survey) Route 2 ÷ 8.28'  
 Bridge Clearance = 48.95'

4 Interior and 4 Edge Okeechobee Lake Average (Avg-Daily values):

L001	L005	L006	LZ40	S4	S352	S308	S133
16.00	16.20	16.17	16.12	16.21	16.29	16.13	16.00

\*Combination Okeechobee Avg-Daily Lake Average = 16.14  
 (\*See Note)

Okeechobee Inflows (cfs):

S65E	4508	C5	-152	Fisheating Cr	4023
S154	232	S191	1338	S135 Pumps	289
S84	2042	S133 Pumps	201	S2 Pumps	856
S84X	810	S127 Pumps	224	S3 Pumps	745
S71	1455	S129 Pumps	160	S4 Pumps	1120
S72	843	S131 Pumps	95		
Total Inflows:	18789				

Okeechobee Outflows (cfs):

S135 Culverts (Used)	0	S354	0	S77	3645
S127 Culverts (USED)	-NR-	S351	0	S77Below	4007 (NOT USED)

S129 Culverts	0	S352	0	S308	1082
(Used)					
S131 Culverts	0	L8 Canal Pt	-55	S308Below	865 (NOT USED)
Total Outflows:	4672				

\*\*\*\*S77 Structure outflow is being used to compute Total Outflow.  
 \*\*\*\*S308 Structure outflow is being used to compute Total Outflow.

Okeechobee Pan Evaporation (inches):

S77	0.14	S308	0.06
Average Pan Evap x 0.75 Pan Coefficient = 0.08" = 0.01'			

Lake Average Precipitation using NEXRAD: = 0.01" = 0.00'

Evaporation - Precipitation: = 0.07" = 0.01'  
 Evaporation - Precipitation using Lake Area of 730 square miles  
 is equal to 1276 cfs out of the lake.  
 Lake Okeechobee (Change in Storage) Flow is 13613 cfs or 27000 AC-FT

Note: Headwater, tailwater, and stage values below are instantaneous values unless otherwise specified.

	Headwater	Tailwater	Disch	----- Gate Positions -----						
---	Elevation	Elevation		#1	#2	#3	#4	#5	#6	#7
#8	(ft-msl)	(ft-msl)	(cfs)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
(ft)										
	(I) see note at bottom									
North East Shore										
S133 Pumps:	13.24	16.10	201	13	88	0	100	0	(cfs)	
S193:	-----									
S191:	18.61	16.17	1338	0.9	0.9	1.5				
S135 Pumps:	-----	-NR-	289	0	0	146	143	(cfs)		
S135 Culverts:			0	-NR-	-NR-					
North West Shore										
S65E:	20.97	16.09	4508	1.8	2.1	2.3	2.1	1.6	1.6	
S127 Pumps:	13.27	-NR-	224	0	100	57	45	21	(cfs)	
S127 Culvert:			-NR-	-NR-						
S129 Pumps:	12.79	16.23	160	3	105	51	(cfs)			
S129 Culvert:			0	0.0						
S131 Pumps:	12.80	16.24	95	0	108	(cfs)				
S131 Culvert:			0							
Fisheating Creek										
nr Palmdale		34.64	4023							
nr Lakeport		-----								

C5: 16.10 16.15 -152 8.0 0.0 8.0

South Shore

S4 Pumps: 9.94 16.19 1120 421 434 265 (cfs)  
 S169: 15.57 11.80 473 2.0 2.0 2.0  
 S310: 16.11 -5  
 S3 Pumps: 11.11 16.16 745 118 615 12 (cfs)  
 S354: 16.16 11.11 0 0.0 0.0  
 S2 Pumps: 10.52 16.12 856 0 685 171 0 (cfs)  
 S351: 16.12 10.52 0 0.0 0.0 0.0  
 S352: 16.34 10.57 0 0.0 0.0  
 C10A: -NR- 16.38 0.0 0.0 0.0 0.0 0.0  
 L8 Canal PT 16.13 -55

---

S351 and S352 Temporary Pumps/S354 Spillway

S351: 10.52 16.12 0 -NR--NR--NR--NR--NR--NR--  
 S352: 10.57 16.34 0 -NR--NR--NR--NR--  
 S354: 11.11 16.16 0 -NR--NR--NR--NR--

---

Caloosahatchee River (S77, S78, S79)

S47B: 13.14 11.74 1.5 1.5  
 S47D: 11.67 11.62 152 5.0  
 S77:  
 Spillway and Sector Flow:  
 15.72 11.80 3637 4.5 6.0 6.0 1.5  
 Flow Due to Lockages+: 8  
 S77 Below USGS Flow Gage 4007  
 S78:  
 Spillway and Sector Flow:  
 11.20 4.37 6398 5.5 5.5 6.0 6.0  
 Flow Due to Lockages+: 15  
 S79:  
 Spillway and Sector Flow:  
 3.57 2.47 11914 6.0 6.0 7.0 7.0 7.0 7.0 6.0  
 6.0  
 Flow Due to Lockages+: 6  
 Percent of flow from S77 31%  
 Chloride (ppm) 40

St. Lucie Canal (S308, S80)

S308:  
 Spillway and Sector Flow:  
 16.17 14.55 1074 0.5 2.5 2.5 0.5  
 Flow Due to Lockages+: 8  
 S308 Below USGS Flow Gage 865  
 S153: 18.64 14.36 1860 4.0 4.0  
 S80:  
 Spillway and Sector Flow:  
 14.11 0.98 2800 1.3 1.3 1.3 0.0 1.3 1.3 0.0

Flow Due to Lockages+: 25  
 Percent of flow from S308 38%

Steele Point Top Salinity (mg/ml) 2119  
 Steele Point Bottom Salinity (mg/ml) 9139

Speedy Point Top Salinity (mg/ml) 534  
 Speedy Point Bottom Salinity (mg/ml) -N

+ Flow Due to lockages is computed utilizing average daily headwater and tailwater along with total number of lockages for the day to calculate a volume which is then converted to an average discharge in cfs.

---

	1-Day	3-Day	7-Day	----- Wind ---	
Daily Precipitation Totals				Direction	
Speed	(inches)	(inches)	(inches)	(Degø)	
(mph)					
S133 Pump Station:	0.00	0.00	3.81		
S193:	-NR-	0.00	0.00	-NR-	-NR-
Okeechobee Field Station:	-NR-	0.00	0.00		
S135 Pump Station:	0.00	0.00	4.38		
S127 Pump Station:	0.00	0.00	3.66		
S129 Pump Station:	0.00	0.00	2.99		
S131 Pump Station:	0.00	0.00	3.36		
S77:	0.00	0.00	5.51	192	1
S78:	9494.83	9494.83	9520.94	56	1
S79:	0.00	0.00	3.64	181	1
S4 Pump Station:	-NR-	0.00	0.00		
Clewiston Field Station:	-NR-	0.00	0.00		
S3 Pump Station:	0.03	0.03	5.02		
S2 Pump Station:	0.01	0.01	4.65		
S308:	*****	*****	*****	270	0
S80:	0.00	0.00	3.23	36	1
Okeechobee Average	3106.67	6474.77	*****		
(Sites S78, S79 and S80 not included)					
-----					
Oke Nexrad Basin Avg	0.01	0.01	4.21		
-----					

---

Okeechobee Lake Elevations	31 JAN 2016	16.14 Difference from
	31JAN16	
31JAN16 -1 Day =	30 JAN 2016	16.08 -0.06
31JAN16 -2 Days =	29 JAN 2016	15.98 -0.16
31JAN16 -3 Days =	28 JAN 2016	15.80 -0.34
31JAN16 -4 Days =	27 JAN 2016	15.54 -0.60
31JAN16 -5 Days =	26 JAN 2016	15.34 -0.80
31JAN16 -6 Days =	25 JAN 2016	15.32 -0.82
31JAN16 -7 Days =	24 JAN 2016	15.31 -0.83
31JAN16 -30 Days =	01 JAN 2016	14.76 -1.38
31JAN16 -1 Year =	31 JAN 2015	14.68 -1.46
31JAN16 -2 Year =	31 JAN 2014	13.93 -2.21

---

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = -NR-

---

Lake Okeechobee Net Inflow (LONIN)

		Average Flow over the previous 14 days			Avg-Daily Flow
31JAN16	Today =	31 JAN 2016	17606	MON	18324
31JAN16	-1 Day =	30 JAN 2016	17537	SUN	24600
31JAN16	-2 Days =	29 JAN 2016	17313	SAT	39023
31JAN16	-3 Days =	28 JAN 2016	16219	FRI	56366
31JAN16	-4 Days =	27 JAN 2016	12056	THU	43370
31JAN16	-5 Days =	26 JAN 2016	8672	WED	4354
31JAN16	-6 Days =	25 JAN 2016	8528	TUE	2389
31JAN16	-7 Days =	24 JAN 2016	8074	MON	-6026
31JAN16	-8 Days =	23 JAN 2016	9162	SUN	28285
31JAN16	-9 Days =	22 JAN 2016	7550	SAT	17533
31JAN16	-10 Days =	21 JAN 2016	6508	FRI	6711
31JAN16	-11 Days =	20 JAN 2016	6345	THU	9022
31JAN16	-12 Days =	19 JAN 2016	6167	WED	-1974
31JAN16	-13 Days =	18 JAN 2016	5427	TUE	4502

---

S65E

		Average Flow over previous 14 days			Avg-Daily Flow
31JAN16	Today=	31 JAN 2016	3451	MON	4508
31JAN16	-1 Day =	30 JAN 2016	3341	SUN	5151
31JAN16	-2 Days =	29 JAN 2016	3119	SAT	4994
31JAN16	-3 Days =	28 JAN 2016	2881	FRI	4246
31JAN16	-4 Days =	27 JAN 2016	2640	THU	3366
31JAN16	-5 Days =	26 JAN 2016	2480	WED	2351
31JAN16	-6 Days =	25 JAN 2016	2374	TUE	2611
31JAN16	-7 Days =	24 JAN 2016	2257	MON	2582
31JAN16	-8 Days =	23 JAN 2016	2143	SUN	3186
31JAN16	-9 Days =	22 JAN 2016	1974	SAT	2977
31JAN16	-10 Days =	21 JAN 2016	1800	FRI	2723
31JAN16	-11 Days =	20 JAN 2016	1648	THU	3060
31JAN16	-12 Days =	19 JAN 2016	1470	WED	3340
31JAN16	-13 Days =	18 JAN 2016	1275	TUE	3216

---

Lake Okeechobee Outlets Last 14 Days

DATE	S-77	S-77	Below S-77	S-78	S-78	S-79
	Discharge (0700-2100) (AC-FT)	Discharge (ALL DAY) (AC-FT)	Discharge (ALL-DAY) (AC-FT)	Discharge (0700-2100) (AC-FT)	Discharge (ALL DAY) (AC-FT)	Discharge (ALL DAY) (AC-FT)
31 JAN 2016	-NR-	7228	7946	-NR-	12718	23638
30 JAN 2016	-NR-	3637	2695	-NR-	10757	25087
29 JAN 2016	-NR-	7	-40	-NR-	9352	28317
28 JAN 2016	-NR-	5	22	-NR-	7274	24331
27 JAN 2016	-NR-	6	75	-NR-	3423	11064
26 JAN 2016	-NR-	19	216	-NR-	2153	6385
25 JAN 2016	-NR-	436	445	-NR-	2344	5070
24 JAN 2016	-NR-	943	733	-NR-	2607	6917

23	JAN	2016	-NR-	2	-441	-NR-	3016	10195
22	JAN	2016	-NR-	8	67	-NR-	1859	6986
21	JAN	2016	-NR-	13	-108	-NR-	1145	6901
20	JAN	2016	-NR-	295	376	-NR-	1258	5476
19	JAN	2016	-NR-	13	90	-NR-	3591	8760
18	JAN	2016	-NR-	11	23	-NR-	4347	9314

	S-310	S-351	S-352	S-354	L8 Canal Pt	
	Discharge	Discharge	Discharge	Discharge	Discharge	
	(ALL DAY)					
DATE	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)	
31	JAN	2016	-10	0	0	-109
30	JAN	2016	-5	0	0	-393
29	JAN	2016	3	0	0	-672
28	JAN	2016	8	0	0	-670
27	JAN	2016	-24	0	0	22
26	JAN	2016	-64	0	0	37
25	JAN	2016	-98	0	0	11
24	JAN	2016	-93	0	0	14
23	JAN	2016	-163	0	0	203
22	JAN	2016	-71	0	0	377
21	JAN	2016	-90	0	0	410
20	JAN	2016	-53	0	0	416
19	JAN	2016	13	0	0	385
18	JAN	2016	-109	0	0	330

	S-308	Below S-308	S-80		
	Discharge	Discharge	Discharge		
	(ALL DAY)	(ALL-DAY)	(ALL-DAY)		
DATE	(AC-FT)	(AC-FT)	(AC-FT)		
31	JAN	2016	-NA-	1716	5602
30	JAN	2016	-NA-	415	5897
29	JAN	2016	1	-NR-	7661
28	JAN	2016	2	-NR-	8029
27	JAN	2016	2	-NR-	3739
26	JAN	2016	6	238	559
25	JAN	2016	6	51	632
24	JAN	2016	3	13	1455
23	JAN	2016	2	-158	1108
22	JAN	2016	4	-265	1118
21	JAN	2016	7	353	398
20	JAN	2016	5	-60	595
19	JAN	2016	2	59	708
18	JAN	2016	3	-47	719

\*\*\* NOTE: 1) Discharge from (0700-2100) is computed using Spillway and Sector

Gate Discharges from 0700 hrs to 2100 hrs.

and 2) Discharge (ALL DAY) is computed using Spillway, Sector Gate

and Lockages Discharges from 0015 hrs to 2400 hrs.

(I) - Flows preceded by "I" signify an instantaneous flow computed from the single value reported for the day

---

—


\* On 11 May 1999, Lake Okeechobee Elevation was switched from Instantaneous 2400 value to an average-daily lake average.  
On 14 Mar 2001, due to the isolation of various gages within the standard  
10 stations, the average of the interior 4 station gages was used as the Lake Okeechobee Elevation.  
On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage mix of interior and edge gages to obtain a more reliable representation of the lake level.  
On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage mix of interior and edge gages to obtain a more reliable representation of the lake level due to isolation of S135 from low lake levels.  
Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations  
++ For more information see the Jacksonville District Navigation website at <http://www.saj.usace.army.mil/>  
\$ For information regarding Lake Okeechobee Service Area water restrictions  
please refer to [www.sfwmd.gov](http://www.sfwmd.gov)

---

—  
Report Generated 01FEB2016 @ 13:15 \*\* Preliminary Data - Subject to Revision  
\*\*

# Lake Okeechobee

01FEB16 13:17:23

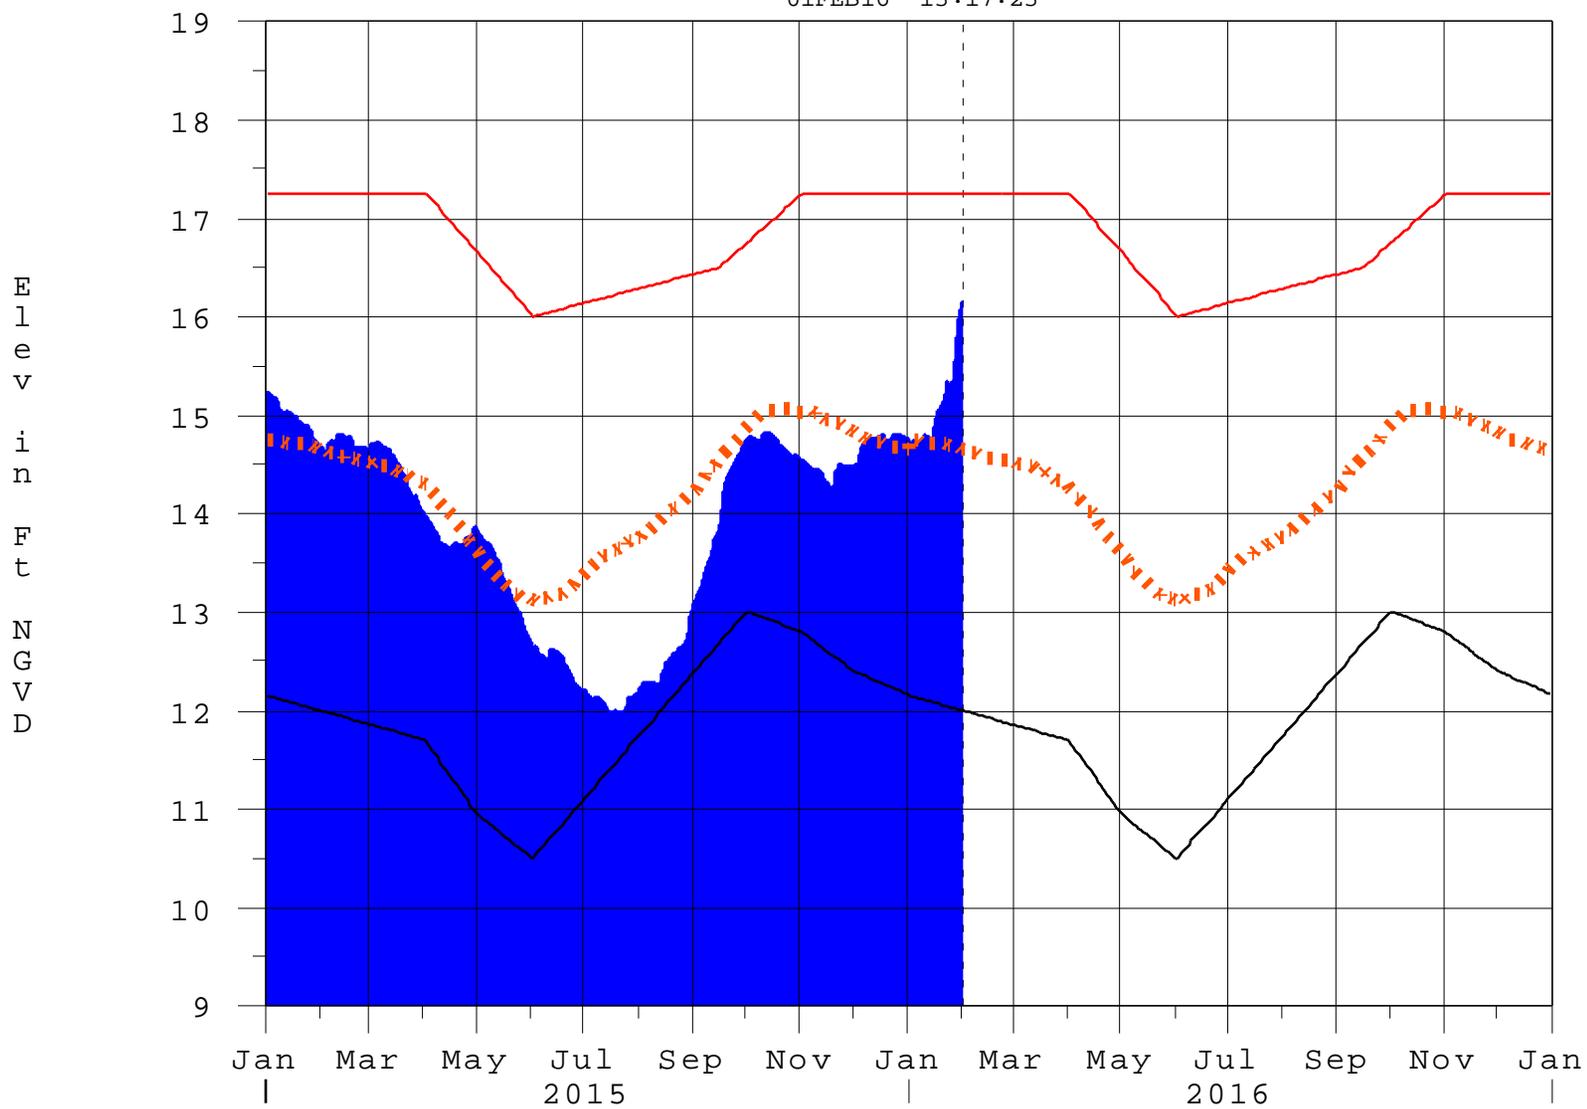

- High Lake Management
- Okeechobee Avg Elev
- Average Elev [1965-2007]
- Water Shortage Management

# Classification Tables

---

Supplemental Tables used in conjunction with the LORS2008 Release

Guidance Flow Charts

- [Class Limits for Tributary Hydrologic Conditions](#)

Table K-2 in the Lake Okeechobee Water Control Plan

- [6-15 Day Precipitation Outlook Categories](#)

Table ?? in the Lake Okeechobee Water Control Plan

- [Classification of Lake Okeechobee Net Inflow for Seasonal Outlook](#)

Table K-3 in the Lake Okeechobee Water Control Plan

- [Classification of Lake Okeechobee Net Inflow for Multi-Seasonal Outlook](#)

Table K-4 in the Lake Okeechobee Water Control Plan

---

[Back to Lake Okeechobee Operations Main Page](#)

[Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage](#)

Tributary Hydrologic Classification*	Palmer Index Class Limits	2-wk Mean L.O. Net Inflow Class Limits
Very Wet	3.0 or greater	Greater $\geq$ 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

\* use the wettest of the two indicators

**Classification of Lake Okeechobee Net Inflow Seasonal Outlook\***

<b>Lake Net Inflow Prediction</b> <b>[million acre-feet]</b>	<b>Equivalent Depth**</b> <b>[feet]</b>	<b>Lake Okeechobee Net Inflow Seasonal Outlook</b>
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

**\*\*Volume-depth conversion based on average lake surface area of 467,000 acres**

## Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook\*

<b>Lake Net Inflow Prediction</b> <b>[million acre-feet]</b>	<b>Equivalent Depth**</b> <b>[feet]</b>	<b>Lake Okeechobee Net Inflow Multi-Seasonal Outlook</b>
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

**\*\*Volume-depth conversion based on average lake surface area of 467,000 acres**

**6-15 Day Precipitation Outlook Categories\***

<b>6-15 Day Precipitation Outlook Categories</b>	<b>WSE Decision Tree Categories</b>
Above Normal	Wet to Very Wet
Normal	Normal
Below Normal	Dry

\* Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan

Under Construction

USACE POSITION STATEMENT: The Corps considers Lake Okeechobee water level to be in the High Sub-band since 4 February 2016.



Considering the lack of availability of STA treatment capacity, SFWMD designated lands, CERP reservoirs, the condition of tributary basins, WCAs water levels well above schedule, precipitation forecast, continued very strong El Niño and Kissimmee Chain of Lake levels, Lake Okeechobee level is less than 0.5 feet below the High Sub-Band and projected to rise into the High Sub-Band, therefore, the allowable Lake Okeechobee release is determined by following Part D (Figure 7-4) with the lake level considered to be in the High Sub-Band.



FACTS/CONSIDERATIONS:


- \* Very strong El Niño conditions ongoing and forecasted to continue
- \* Definitely, one of the strongest El Niño since 1950
- \* Record wettest January in South Florida since records began in 1932
- \* Lake Okeechobee water level above the optimum range of 12.5 and 15.5 feet, NGVD29
- \* No additional storage available in SFWMD designated lands per SFWMD
- \* No additional storage available in the WCAs
- \* Tributary hydrologic conditions remain very wet
- \* Lake Okeechobee releases made since 4 February is equivalent to 0.5 feet off the lake
- \* WPC QPF for the next week indicates rainfall
- \* CPC Long Range Forecasts (i.e. 6-10 Day, 8-14 Day, 1-Month and 3-Month Outlooks) indicate very high chance of above average rainfall for the rest of the dry season
- \* Parts C and D of the 2008 LORS WCP are the operational guidance that provide essential supplementary information to be used in conjunction with other supporting documentation including text within the Water Control Plan.
- \* Decision-Making Process: The decision-making process for Lake Okeechobee water management operations considers all Congressionally-authorized project purposes. The decision-making process to determine quantity, timing, and duration of the potential release from Lake Okeechobee includes consideration of various information related to water management. This information includes but is not necessarily limited to: C&SF Project conditions, historical lake levels, estuary conditions/needs, lake ecology conditions/needs, WCA water levels, STA available capacity, current climate conditions, climate forecasts, hydrologic outlooks, projected lake level rise/recession, and water supply conditions/needs.
- \* Near band and sub-band limits: When operating near band and sub-band limits, up to 30-day forecasts will be made and releases will be scheduled to lower or maintain Lake Okeechobee at the desired level during the 30-day period. Scheduling of releases may include the adjustment of band/sub-band limits when determining the release to implement. Factors considered in adjusting the band/sub-band limits would include but not be limited to: availability of STA treatment capacity, SFWMD designated lands, CERP reservoirs, and the condition of tributary basins. The band/sub-band adjustment is meant to transition into and out of sub-bands by allowing flows to gradually increase or decrease between sub-bands.

REFERENCE:

2008 Lake Okeechobee Regulation Schedule Water Control Plan

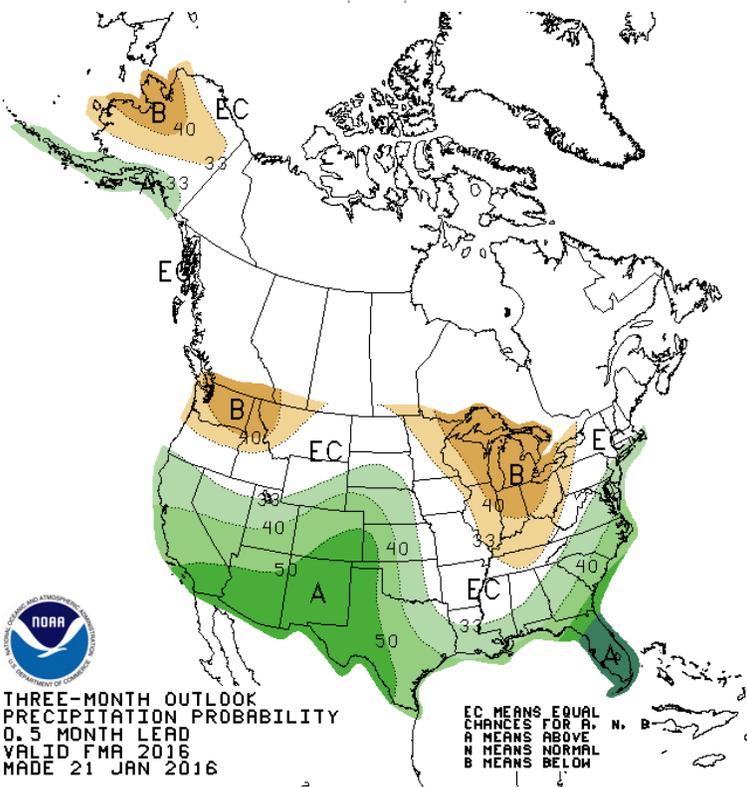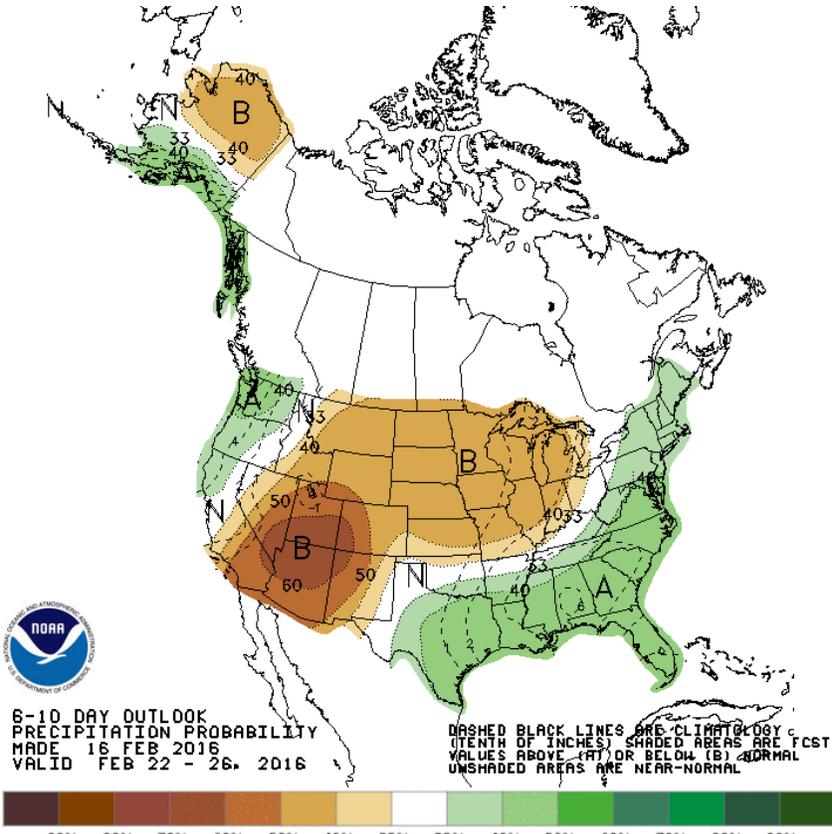

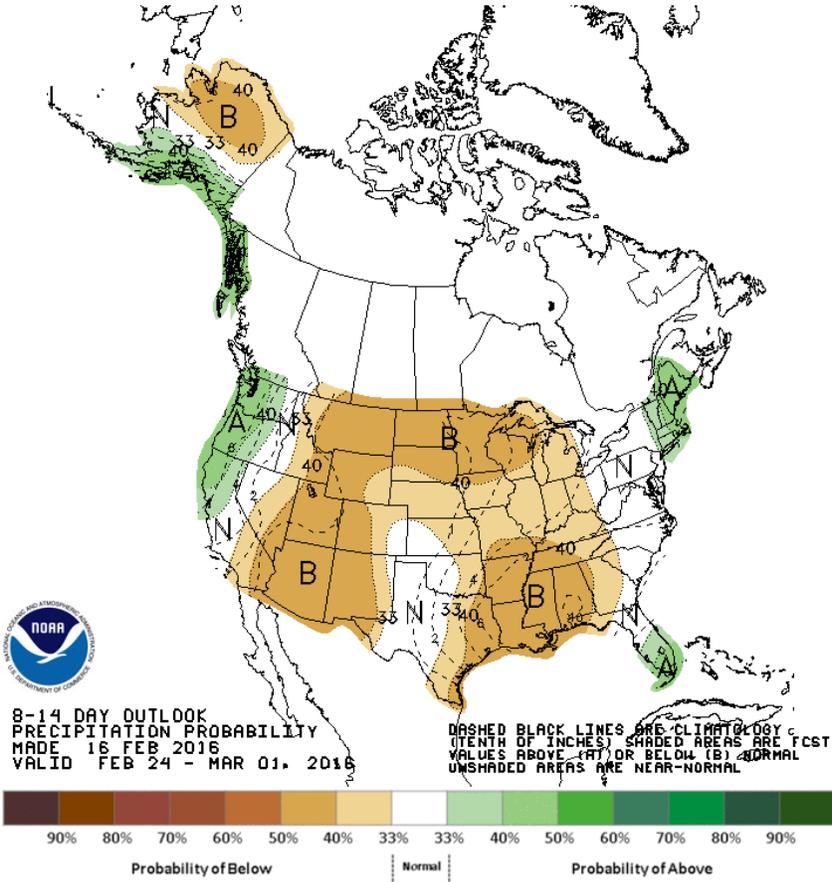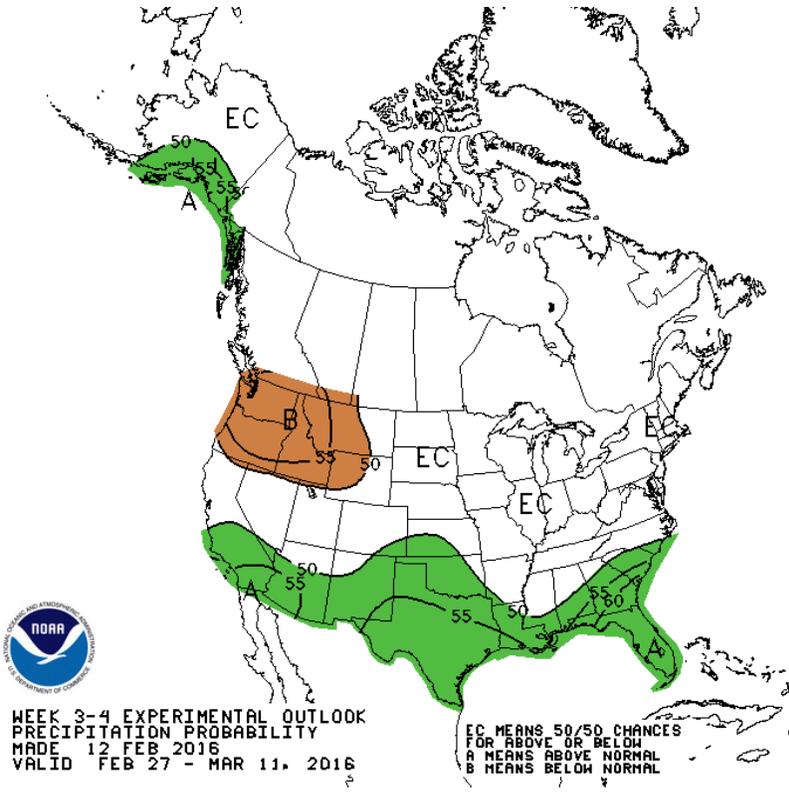

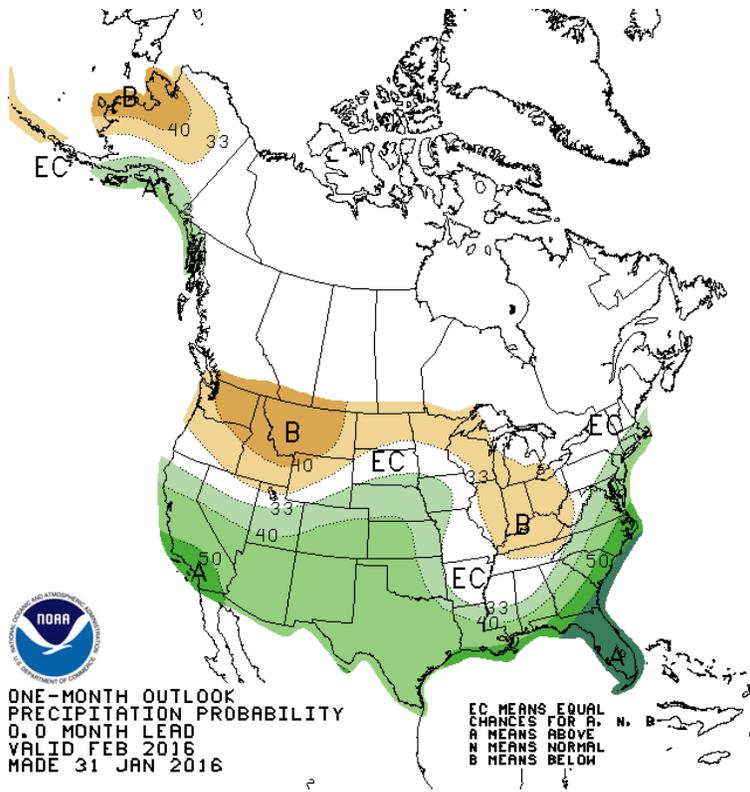

Lake Oke Compared to EL [1965-2007] on 17Feb w/o Flows to S-77 and S-308

