# Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 10/17/2016 (ENSO Neutral Condition)

### Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method<sup>1</sup>, the SFWMD empirical method<sup>2</sup>, a sub-sampling of Neutral years<sup>3</sup> and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with Neutral ENSO years<sup>4</sup>. The results for Croley's method and the SFWMD empirical method are based on the <u>CPC Outlook</u>.

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season	Croley's Method <sup>1*</sup>		En	WMD npirical ethod <sup>2</sup>	Sub-sampling of Neutral ENSO Years <sup>3</sup>		Sub-sampling of AMO Warm + Neutral ENSO Years <sup>4</sup>	
	Value (ft)	Condition	Value (ft)	<u>Condition</u>	Value (ft)	Condition	Value (ft)	Condition
Current (Oct- Mar)	N/A	N/A	1.49	Normal	1.80	Wet	2.22	Very Wet
Multi Seasonal (Oct-Apr)	N/A	N/A	1.43	Normal	1.72	Normal	2.15	Normal

### \*Croley's Method Not Produced For This Report

See <u>Seasonal</u> and <u>Multi-Seasonal</u> tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

#### Tributary Hydrologic Conditions Graph:

**8498 cfs** 14-day running average for Lake Okeechobee Net Inflow through 10/16/2016. According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Very Wet.

**0.43** for Palmer Index on 10/15/2016.

According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

The wetter of the two conditions above is Very Wet.

### LORS2008 Classification Tables:

#### Lake Okeechobee Stage on 10/17/2016

Lake Okeechobee Stage: 15.91 feet

USACE Report for Lake Okeechobee

Lake Okeechobee Stage Hydrograph

Lake Okeechob	ee Management	<b>Bottom Elevation</b>	Current
Zone	/Band	(feet, NGVD)	Lake Stage
High Lake Manag	omont Dond	16.00	
High Lake Manage	ement band	16.99	
	High sub-band	16.62	
Operational Band	Intermediate sub-band	16.08	
	Low sub-band	14.50	← 15.91
Base Flow sub-ba	nd	12.93	
Beneficial Use sub	o-band	12.90	
Water Shortage M	lanagement Band		

#### Part C of LORS2008: Discharge to WCA's

Release Guidance Flow Chart Outcome: No Releases to the WCAs

### Part D of LORS2008: Discharge to Tidewater

Release Guidance Flow Chart Outcome: S-79 up to 3000 cfs and S-80 up to 1170 cfs

### **Technical Input Summaries from:**

- Lake Okeechobee Division
- Coastal Ecosystems
- Everglades Ecosystems Division
- Water Supply Department
- Water Resource Management Release Recommendation
- <u>Kissimmee Watershed Environmental Conditions</u>
- Operations Department

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers LORSS Homepage

#### LORS2008 Implementation on 10/17/2016 (ENSO Neutral Condition):

#### Status for week ending 10/17/2016:

District wide, Raindar rainfall was 0.36 inches for the week. Lake stage on 10/17/2016 was 15.91 ft, down 0.13 ft from last week.

The updated October 2016 SFWMM Dynamic Position Analysis <u>percentile graph</u> for Lake Okeechobee show that the current lake stage is in the Low Operational Sub-Band.

The LORS2008 tributary <u>indices</u> are classified as **Very Wet**. The PDSI indicates normal condition and the LONIN is Very Wet. The classification is based on the wetter of the two.


#### Water Supply Risk Evaluation

Area	Indicator	Value	Color Coded Scoring Scheme
	Projected LOK Stage for the next two months	Low Sub-Band	L
	Palmer Index for LOK Tributary Conditions	0.43 (Normal)	L
	CPC Procinitation Outlook	1 month: Normal	L
LOK	CPC Precipitation Outlook	3 months: Below Normal	М
	LOK Seasonal Net Inflow Outlook ENSO Neutral Years	1.80 ft (Normal to Extremely Wet)	L
	LOK Multi-Seasonal Net Inflow Outlook ENSO Neutral Years	1.72 ft (Normal)	М
	WCA 1: Site 1-7, Site 1-8T, & Site 1-9 Average	Above Line 1 (17.01 ft)	L
WCAs	WCA 2A: Site 2-17 HW	Above Line1 (13.59 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64 and 65)	Above Line 1 (10.76 ft)	L
	Service Area 1	Year-Round Irrigation Rule in effect	L
LEC	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L


Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow outlooks use slightly different classification intervals than those used by the 2008-LORS.

Back to Lake Okeechobee Operations Main Page Back to U.S. Army Corps of Engineers LORSS Homepage

# Lake Okeechobee SFWMM October 2016 Position Analysis

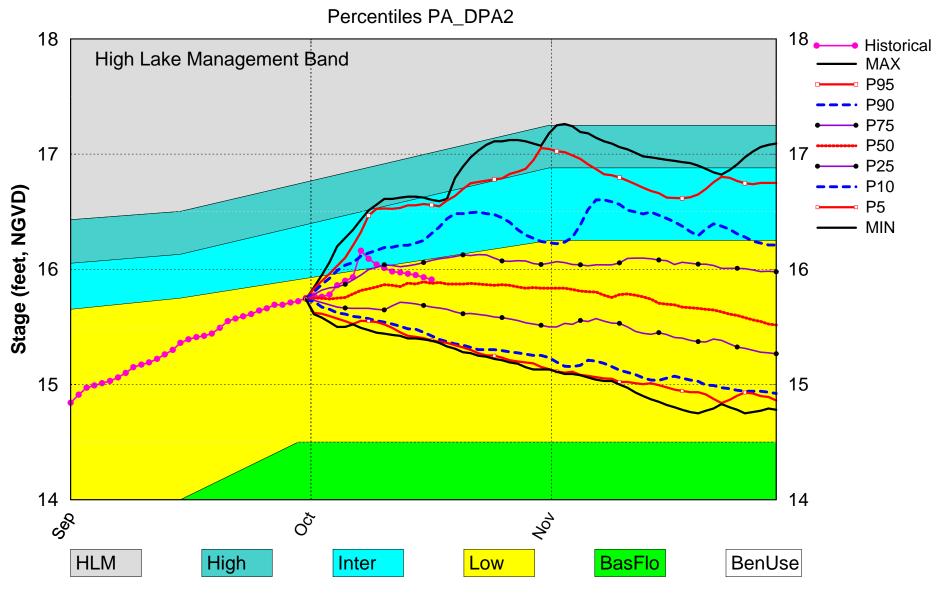

(See assumptions on the Position Analysis Results website)

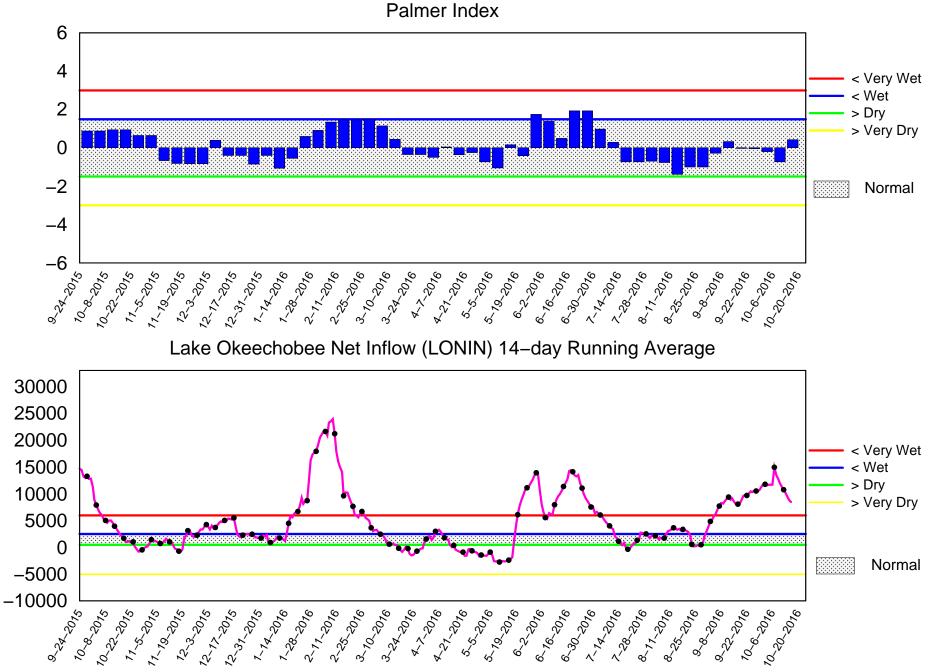


### Tributary Basin Condition Indicators as of October 18 2016

Tue Oct 18 9:15:05 EDT 2016


# 2008 LORS


### Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

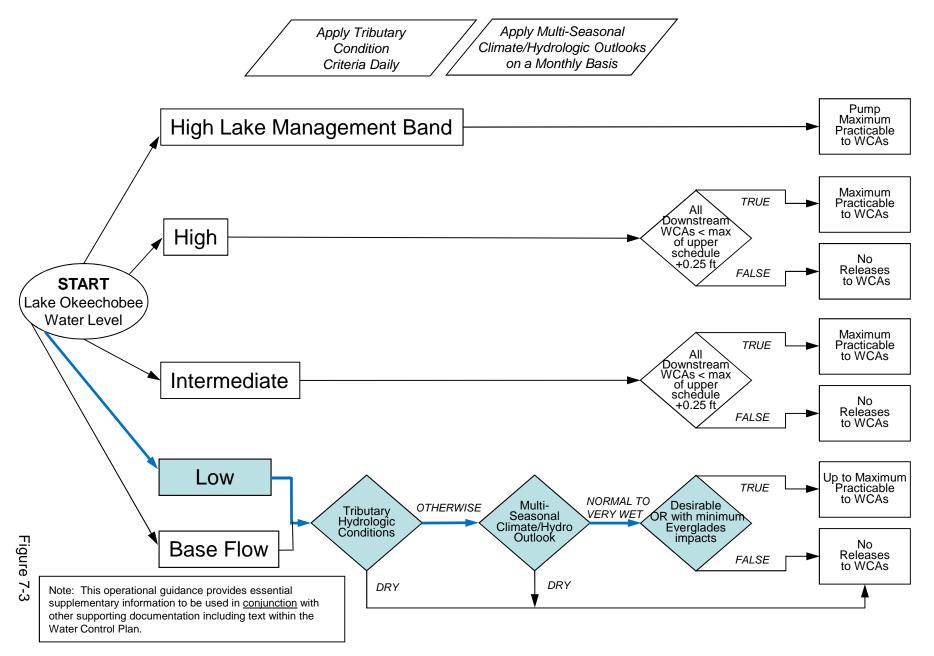

## 2008 LORS

### Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

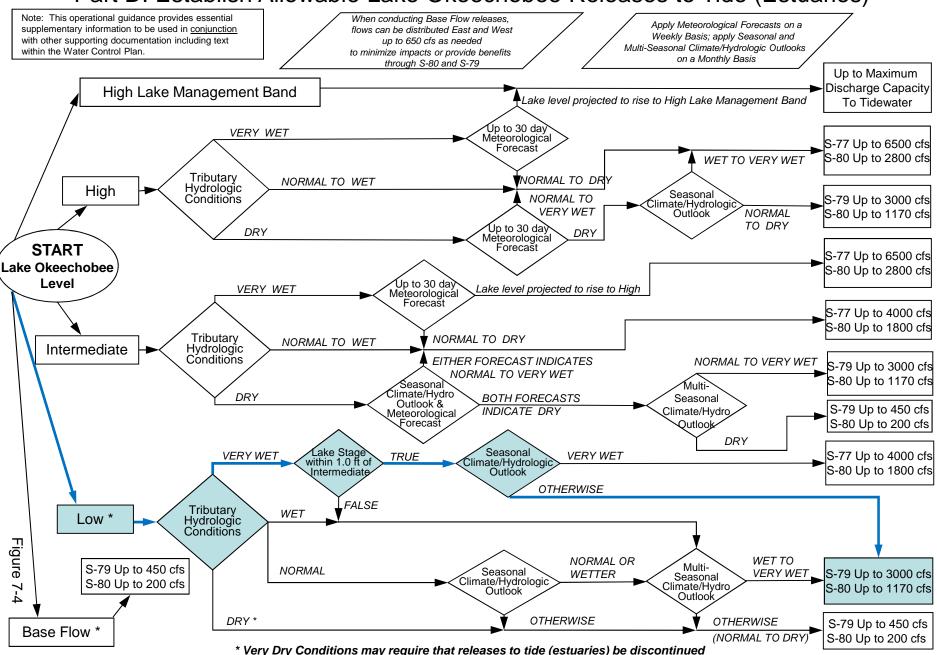

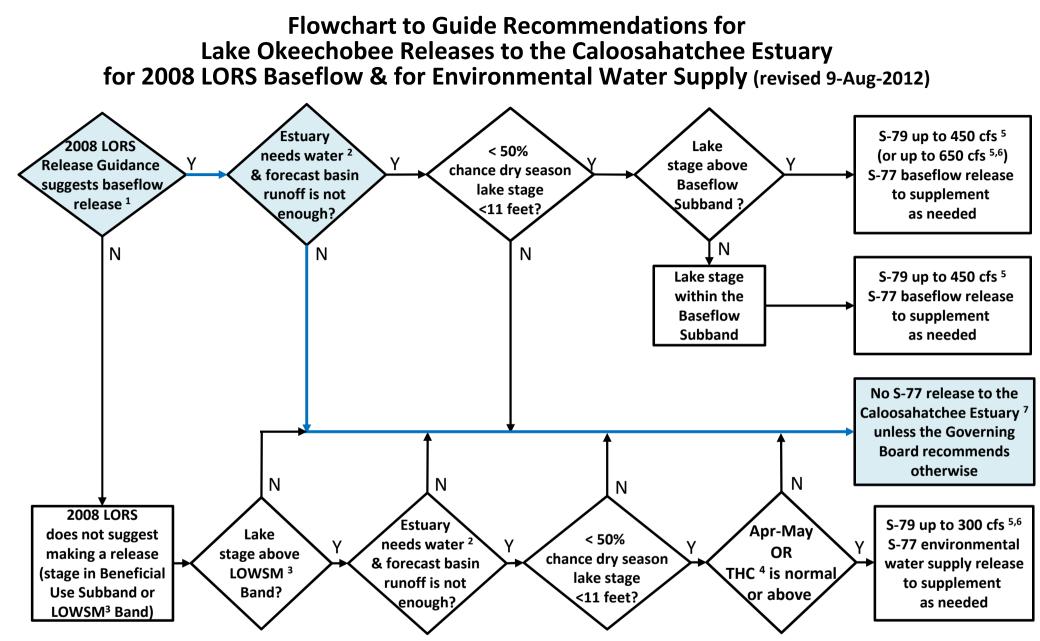

<sup>1</sup>The 2008 LORS Release Guidance (Part D) can suggest baseflow releases in the Intermediate, Low, or Baseflow Subbands.


<sup>2</sup>Estuary "needs" water when the 30-day moving average salinity at I-75 bridge is projected to exceed 5 practical salinity units (psu) within 2 weeks. <sup>3</sup>LOWSM = Lake Okeechobee Water Shortage Management.

<sup>4</sup>Tributary Hydrologic Condition (THC) is based on classification of Lake Okeechobee Net Inflow and Palmer Index.

<sup>5</sup>Can release less than the "up to" limit if lower release is sufficient to reach or sustain desired estuary salinity; cfs = cubic feet per second.

<sup>6</sup>After reviewing conditions in Water Conservation Areas (WCAs), Stormwater Treatment Areas (STAs), ENP, St. Lucie Estuary and Lake Okeechobee. <sup>7</sup>Should this condition be reached, the Governing Board will be briefed at their next regularly scheduled meeting as part of the State of the Water Resources agenda item.

### Lake Okeechobee Water Level History and Projected Stages

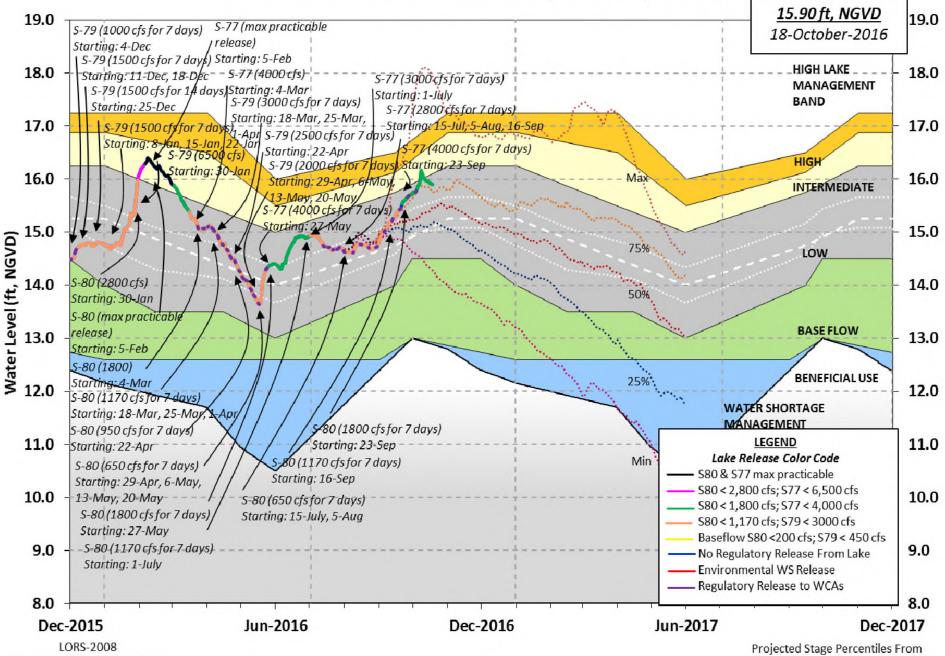

Adopted by USACE 28-April-2008

SFWMD-HESM Position Analysis

U. S. Army Corps of Engineers, Jacksonville District Lake Okeechobee and Vicinity Report \*\* Preliminary Data - Subject to Revision \*\* Data Ending 2400 hours 09 OCT 2016 Okeechobee Lake Regulation Elevation Last Year 2YRS Ago (ft-NGVD) (ft-NGVD) (ft-NGVD) \*Okeechobee Lake Elevation 16.04 14.75 15.69 (Official Elv) Bottom of High Lake Mngmt= 16.88 Top of Water Short Mngmt= 12.95 Currently in Operational Management Band Simulated Average LORS2008 [1965-2000] 13.93 Difference from Average LORS2008 2.11 090CT (1965-2007) Period of Record Average 15.02 Difference from POR Average 1.03 Today Lake Okeechobee elevation is determined from the 4 Int & 4 Edge stations ++Navigation Depth (Based on 2007 Channel Condition Survey) Route 1 ÷ 9.98' ++Navigation Depth (Based on 2008 Channel Condition Survey) Route 2 ÷ 8.18' Bridge Clearance = 48.60' 4 Interior and 4 Edge Okeechobee Lake Average (Avg-Daily values): L001 L005 L006 LZ40 S4 S352 S308 S133 15.82 16.11 16.12 16.06 16.18 16.25 15.97 15.82 \*Combination Okeechobee Avg-Daily Lake Average = 16.04 (\*See Note) Okeechobee Inflows (cfs): 0 S65E 3886 C5 Fisheating Cr 955 S191 S154 194 1169 S135 Pumps 177 S84 214 S133 Pumps 125 S2 Pumps 0 S84X 683 S127 Pumps 71 S3 Pumps 0 472 46 0 S71 S129 Pumps S4 Pumps S72 168 S131 Pumps 16 Total Inflows: 8176 Okeechobee Outflows (cfs): S135 Culverts 0 S354 0 S77 7307 S127 Culverts 0 S351 0 S77Below 6154 S129 Culverts 0 S352 0 S308 2940 S131 Culverts 0 L8 Canal Pt 9 S308Below 2654 Total Outflows: 10256

```
****S77 Structure outflow is being used to compute Total Outflow.
****$308 Structure outflow is being used to compute Total Outflow.
Okeechobee Pan Evaporation (inches):
     0.25 S308
 S77
                                  0.30
 Average Pan Evap x 0.75 Pan Coefficient = 0.21" = 0.02'
Lake Average Precipitation using NEXRAD: = -NR-" = -NR-'
Evaporation - Precipitation:
                                  = -NR-" = -NR-'
Evaporation - Precipitation using Lake Area of 730 square miles
 is equal to
            -NR-
Lake Okeechobee (Change in Storage) Flow is -11344 cfs or -22500 AC-FT
Note: Headwater, tailwater, and stage values below are instantaneous values
    unless otherwise specified.
           Headwater Tailwater
                                  ----- Gate Positions ------
____
           Elevation Elevation Disch #1 #2 #3 #4 #5 #6 #7
#8
           (ft-msl) (ft-msl) (cfs) (ft) (ft) (ft) (ft) (ft) (ft)
(ft)
                         (I) see note at bottom
North East Shore
                                   24 0 41 0 53 (cfs)
 S133 Pumps: 13.34
                    15.68
                            125
 S193:
 S191:
            18.02
                     15.69
                           1169
                                    1.5 1.0 1.5
 S135 Pumps: 13.34
                             177
                                        0 55 67
                     15.81
                                    61
                                                         (cfs)
 S135 Culverts:
                                    0.0 0.0
                               0
North West Shore
       21.04
                             3886 1.8 1.8 1.8 1.8 1.8 1.3
 S65E:
                   15.61
 S127 Pumps: 13.38
                    15.88
                              71
                                 -NR-
                                        0
                                            34 52 0 (cfs)
 S127 Culvert:
                               0 0.0
 S129 Pumps: 12.86
                     16.04
                             46
                                    42
                                        0
                                            0
                                                         (cfs)
                              0
 S129 Culvert:
                                    0.0
 S131 Pumps: 12.82 16.06
                              16 0 18
                                                         (cfs)
 S131 Culvert:
                              0
 Fisheating Creek
   nr Palmdale
                     32.78
                             955
   nr Lakeport
           16.42 15.97
 C5:
                             0 0.0 0.0 0.0
South Shore
 S4 Pumps:10.9316.290000S169:14.6010.9400.00.00.0
                                    0 0 0
                                                        (cfs)
```

S354:       16.49       10.64       0       0.0       0	S310: S3 Pumps:	16.27 10.64	16.49	2 0	0	0	0		(cfs)
S2 Pumps:       9.84       16.41       0	-						0		(CID)
S351:       16.41       9.84       0       0.0       0.0       0.0         S352:       16.31       9.29       0       0.0       0.0       0.0         S351:       -NR-       14.75       0.0       0.0       0.0       0.0       0.0         L8 Canal PT       14.56       9       0       -NRNRNRNRNRNR-         S351:       9.84       16.41       0       -NRNRNRNRNR-         S352:       9.29       16.31       0       -NRNRNRNRNR-         S352:       9.29       16.31       0       -NRNR-NR-NR-NR-         S351:       9.84       16.41       0       -NR-NR-NR-NR-NR-NR-         S352:       9.29       16.31       0.9       1.4         S47D:       10.52       10.49       101       6.0         S77:       Spillway and Sector Flow:       15.74       10.84       7300       6.0       6.0       6.0         S78:       Spillway and Sector Flow:       -NR-       -NR-       NR-       -NR-       NR-       NR-         S79:       Spillway and Sector Flow:       -NR-       7845       -NR-       -NR-       -NR-       NR-         Flow Due to Lockages+:							0	0	(cfs)
S352:       16.31       9.29       0       0.0       0.0         C10A:       -NR-       14.75       0.0       0.0       3.0       0.0         S351       and S352       Temporary Pumps/S354 Spillway         S351:       9.84       16.41       0       -NRNRNRNRNRNR-S         S352:       9.29       16.31       0       -NRNRNRNRNR-S         S354:       10.64       16.49       0       -NRNR-NR-S         S354:       10.64       10.49       0       1.4         S47D:       10.52       10.49       10       6.0         S47D:       10.52       10.49       10       6.0         S77:       Spillway and Sector Flow:       15.74       10.84       7300       6.0       6.0       6.0         S78:       Spillway and Sector Flow:       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9       9       79:       Spillway and Sector Flow:       -NR-       -NR-       NR-								0	(010)
C10A: -NR- 14.75 0.0 0.0 3.0 0.0 0.0 L8 Canal PT 14.56 9 S351 and S352 Temporary Pumps/S354 Spillway S351: 9.84 16.41 0 -NRNRNRNRNR- S352: 9.29 16.31 0 -NRNRNRNR- S354: 10.64 16.49 0 -NRNRNRNR- S354: 10.64 16.49 0 -NRNRNR- S47B: 12.82 10.73 0.9 1.4 S47D: 10.52 10.49 101 6.0 S77: Spillway and Sector Flow: 15.74 10.84 7300 6.0 6.0 6.0 6.0 Flow Due to Lockages+: 7 S77 Below USGS Flow Gage 6154 S78: Spillway and Sector Flow: 10.31 3.13 7017 6.5 5.0 5.5 5.5 Flow Due to Lockages+: 9 S79: Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N C. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690									
L8 Canal PT 14.56 9 S351 and S352 Temporary Pumps/S354 Spillway S351: 9.84 16.41 0 -NRNRNRNRNR- S352: 9.29 16.31 0 -NRNRNRNRNR- S354: 10.64 16.49 0 -NRNRNRNR- aloosahatchee River (S77, S78, S79) S47B: 12.82 10.73 0.9 1.4 S47D: 10.52 10.49 101 6.0 S77: Spillway and Sector Flow: 15.74 10.84 7300 6.0 6.0 6.0 6.0 Flow Due to Lockages+: 7 S77 Below USGS Flow Gage 6154 S78: Spillway and Sector Flow: 10.31 3.13 7017 6.5 5.0 5.5 5.5 Flow Due to Lockages+: 9 S79: Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNR- Flow Due to Lockages+: -NR- Flow Due to Lockages+: -NR- Fercent of flow from S77 93% Chloride (ppm) -N C. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690							2 0	0 0	0 0
S351 and S352 Temporary Pumps/S354 Spillway           S351:         9.84         16.41         0         -NRNRNRNRNRNR-S352:         9.29         16.31         0         -NRNRNRNRNR-S354:         10.64         16.49         0         -NRNRNRNRNR-S354:         10.64         16.49         0         -NRNRNRNRNR-S354:         10.64         16.49         0         -NRNRNRNRNR-S354:         10.64         16.49         0         -NRNRNRNRNR-S354:         10.61         S774         10.52         10.49         101         6.0         S774         10.52         10.49         101         6.0           S77:         Spillway and Sector Flow:         15.74         10.84         7300         6.0         6.0         6.0         Flow Due to Lockages+:         7           S77         Below USGS Flow Gage         6154         S78:         Spillway and Sector Flow:         10.31         3.13         7017         6.5         5.0         5.5         5.5           Spillway and Sector Flow:         -NR-         -NR-					0.0	0.0	3.0	0.0	0.0
S351: 9.84 16.41 0 -NRNRNRNRNR- S352: 9.29 16.31 0 -NRNRNRNR- S354: 10.64 16.49 0 -NRNRNR- S354: 10.64 16.49 0 -NRNRNR- aloosahatchee River (S77, S78, S79) S47B: 12.82 10.73 0.9 1.4 S47D: 10.52 10.49 101 6.0 S77: Spillway and Sector Flow:	L8 Canal Pi	Ľ	14.56	9					
S352:       9.29       16.31       0       -NRNRNR-NR-ST         S344:       10.64       16.49       0       -NRNRNR-ST         S47B:       12.82       10.73       0.9       1.4         S47D:       10.52       10.49       101       6.0         S77:       Spillway and Sector Flow:       15.74       10.84       7300       6.0       6.0       6.0         Flow Due to Lockages+:       7       7       7       8       8       8       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9       9       9       9       9       9       9       9       9       9       9       9       10.31       3.13       7017       6.5       5.0       5.5       5.5       5		S351	and S3	52 Tempor	ary Pum	ps/S354	Spil	lway	
S354:       10.64       16.49       0       -NRNRNR-         aloosahatchee River (S77, S78, S79)       S47B:       12.82       10.73       0.9       1.4         s47D:       10.52       10.49       101       6.0         S77:       Spillway and Sector Flow:       15.74       10.84       7300       6.0       6.0       6.0         Flow Due to Lockages+:       7         S77       Below USGS Flow Gage       6154         S78:       Spillway and Sector Flow:       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9       9       9       9       9       9       9       8       9	S351:	9.84			-NRN	RNR	NRN	RNR-	
Alloosahatchee River (S77, S78, S79)           S47B:         12.82         10.73         0.9         1.4           S47D:         10.52         10.49         101         6.0           S77:         Spillway and Sector Flow:         15.74         10.84         7300         6.0         6.0         6.0           Flow Due to Lockages+:         7         7         577         Below USGS Flow Gage         6154           S78:         Spillway and Sector Flow:         10.31         3.13         7017         6.5         5.0         5.5         5.5           Flow Due to Lockages+:         9         9         579:         Spillway and Sector Flow:         -NR-         -NR-         -NR-         -NR-         -NR-         NR-         -NR-         -NR-         NR-         -NR-         NR-	S352:	9.29	16.31	0	-NRN	RNR	NR-		
S47B: 12.82 10.73 0.9 1.4 S47D: 10.52 10.49 101 6.0 S77: Spillway and Sector Flow: 15.74 10.84 7300 6.0 6.0 6.0 6.0 Flow Due to Lockages+: 7 S77 Below USGS Flow Gage 6154 S78: Spillway and Sector Flow: 10.31 3.13 7017 6.5 5.0 5.5 5.5 Flow Due to Lockages+: 9 S79: Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N C. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Steele Point Top Salinity (mg/ml) 3690	S354:	10.64	16.49	0	-NRN	RNR	NR-		
S47B: 12.82 10.73 0.9 1.4 S47D: 10.52 10.49 101 6.0 S77: Spillway and Sector Flow: 15.74 10.84 7300 6.0 6.0 6.0 6.0 Flow Due to Lockages+: 7 S77 Below USGS Flow Gage 6154 S78: Spillway and Sector Flow: 10.31 3.13 7017 6.5 5.0 5.5 5.5 Flow Due to Lockages+: 9 S79: Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N C. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Steele Point Top Salinity (mg/ml) 3690	aloosahatche	ee River (S	77. S78	<i>.</i> S79)					
S47D:       10.52       10.49       101       6.0         S77:       Spillway and Sector Flow:       15.74       10.84       7300       6.0       6.0       6.0         Flow Due to Lockages+:       7       7       7       7       7       7         S77 Below USGS Flow Gage       6154         S78:       Spillway and Sector Flow:       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9       9       9       5       7       9       7				•	0.9	1.4			
<pre>S77: Spillway and Sector Flow:</pre>				101					
15.74       10.84       7300       6.0       6.0       6.0         Flow Due to Lockages+:       7         S77 Below USGS Flow Gage       6154         S78:       Spillway and Sector Flow:       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9       9       9       579:       Spillway and Sector Flow:       -NR-       -NR-       -NR-       -NR-       NR-       -NR-       NR-       -NR-       NR-       S3				±0±	5.0				
Flow Due to Lockages+:       7         S77 Below USGS Flow Gage       6154         S78:       Spillway and Sector Flow:         10.31       3.13         Flow Due to Lockages+:       9         S79:       Spillway and Sector Flow:         -NR-       -NR-         Flow Due to Lockages+:       9         S79:       Spillway and Sector Flow:         -NR-       -NR-         Flow Due to Lockages+:       -NR-         Percent of flow from S77       93%         Chloride       (ppm)         -N       -NR-         Solos:       Spillway and Sector Flow:         15.99       14.90         2937       5.0       2.8       2.8         S308 Below USGS Flow Gage       2654         S153:       18.96       14.67       102       0.5       0.6         S0:       Spillway and Sector Flow:       13.77       2.04       3086       0.8       0.8       0.8       0.8       0.8         S1:1way and Sector Flow:       13.77       2.04       3086       0.8       0.8       0.8       0.8       0.8         Sillway and Sector Flow:       13.77       2.04       3086       0.8	Spillway								
S77 Below USGS Flow Gage       6154         S78:       Spillway and Sector Flow:         10.31       3.13         Flow Due to Lockages+:       9         S79:       Spillway and Sector Flow:         -NR-       -NR-         Flow Due to Lockages+:       9         S79:       Spillway and Sector Flow:         -NR-       -NR-         Flow Due to Lockages+:       -NR-         Percent of flow from S77       93%         Chloride       (ppm)         S308:       Spillway and Sector Flow:         15.99       14.90         2937       5.0       2.8       2.8         S308 Below USGS Flow Gage       2654         S153:       18.96       14.67       102       0.5       0.6         S80:       Spillway and Sector Flow:       13.77       2.04       3086       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8         S11lway and Sector Flow:       13.77       2.04       3086       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8       0.8				7300	6.0 6	.0 6.0	6.0		
S78: Spillway and Sector Flow: 10.31 3.13 7017 6.5 5.0 5.5 5.5 Flow Due to Lockages+: 9 S79: Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N E. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690	Flow Due	to Lockage	s+:	7					
Spillway and Sector Flow:       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9         S79:       Spillway and Sector Flow:       -NR-       -NR-       7845       -NR-       -NR-       -NR-       NR-       -NR-       NR-       -NR-       -NR-       NR-       -NR-       -NR-       NR-       NR-       -NR-       NR-       -NR-       NR-       -NR-       NR-       S       S       S	S77 Below (	JSGS Flow G	age	6154					
Spillway and Sector Flow:       10.31       3.13       7017       6.5       5.0       5.5       5.5         Flow Due to Lockages+:       9         S79:       Spillway and Sector Flow:       -NR-       -NR-       7845       -NR-       -NR-       -NR-       NR-       -NR-       NR-       -NR-       -NR-       NR-       -NR-       -NR-       NR-       NR-       -NR-       NR-       -NR-       NR-       -NR-       NR-       S       S       S	S78:								
10.31 3.13 7017 6.5 5.0 5.5 5.5 Flow Due to Lockages+: 9 S79: Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N E. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690		and Sector	Flow:						
<pre>Flow Due to Lockages+: 9 S79: Spillway and Sector Flow:</pre>	opilina,			7017	65	50 5	5 5	5	
Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690	Flow Due				0.0	5.5		•••	
Spillway and Sector Flow: -NRNR- 7845 -NRNRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690	970.								
-NRNR- 7845 -NRNRNRNRNRNRNR- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690		and Costor	Flow						
<pre>R- Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow:</pre>	Spiirway			7945			IDN	DND.	
<pre>Flow Due to Lockages+: -NR- Percent of flow from S77 93% Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow:</pre>	P_	-1117-	-111/-	7045	-111-	-1117 - 11	IKN	KMK	MK MK-
Percent of flow from S77 93% Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690		to Lockage	a+:	-NR-					
Chloride (ppm) -N t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow: 15.99 14.90 2937 5.0 2.8 2.8 2.8 Flow Due to Lockages+: 3 S308 Below USGS Flow Gage 2654 S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690		-							
<pre>t. Lucie Canal (S308, S80) S308: Spillway and Sector Flow:</pre>		JI IIOW IIO							
<pre>S308: Spillway and Sector Flow:</pre>	childride		(Ppm)	14					
Spillway and Sector Flow:       15.99       14.90       2937       5.0       2.8       2.8       2.8         Flow Due to Lockages+:       3         S308 Below USGS Flow Gage       2654         S153:       18.96       14.67       102       0.5       0.6         S80:       3       3       3       3       3         Spillway and Sector Flow:       13.77       2.04       3086       0.8 <td></td> <td>nal (S308,</td> <td>S80)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		nal (S308,	S80)						
15.99       14.90       2937       5.0       2.8       2.8       2.8         Flow Due to Lockages+:       3         S308 Below USGS Flow Gage       2654         \$153:       18.96       14.67       102       0.5       0.6         \$80:       3       3       3       3       3         Spillway and Sector Flow:       13.77       2.04       3086       0.8		and Carter	El arri						
Flow Due to Lockages+:       3         S308 Below USGS Flow Gage       2654         \$153:       18.96       14.67       102       0.5       0.6         \$80:	эртттмай			2027	50 0	8 2 9	2 2 2		
<pre>S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow:</pre>	Flow Due				J.0 Z	.0 2.0	2.0		
<pre>S153: 18.96 14.67 102 0.5 0.6 S80: Spillway and Sector Flow:</pre>	S308 Below	USGS Flow	Gage	2654					
<pre>S80: Spillway and Sector Flow: 13.77 2.04 3086 0.8 0.8 0.8 0.8 0.8 0.8 0.8 0.8 Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690</pre>			-		0.5	0.6			
Spillway and Sector Flow:       13.77       2.04       3086       0.8		_0.20	/	±02	0.0				
13.77       2.04       3086       0.8       <		and Sector	Flow:						
Flow Due to Lockages+: 21 Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690	- <u>-</u>			3086	0.8	0.8 (	.8 0	.8 0.1	8 0.8 0.8
Percent of flow from S308 95% Steele Point Top Salinity (mg/ml) 3690	Flow Due						0		
Steele Point Top Salinity (mg/ml) 3690		-							
	(			200					
	Steele Poir	nt Top Sali	nity	(mg/ml)	3690				

				W	ind
aily Precipitation Totals peed	1-Day	3-Day	7-Day	Directi	on
	(inches)	(inches)	(inches)	(Degø)	
mph)					
S133 Pump Station:	-NR-	0.00	0.00		
S193:	-NR-	0.00	0.00	-NR-	-NR
Okeechobee Field Station:	-NR-	0.00	0.00		
S135 Pump Station:	-NR-	0.00	0.00		
S127 Pump Station:	-NR-	0.00	0.00		
S129 Pump Station:	-NR-	0.00	0.00		
S131 Pump Station:	-NR-	0.00	0.00		
S77:	0.00	0.00	1.01	49	
S78:	0.00	0.00	1.37	5	
S79:	-NR-	0.00	0.00	-NR-	-NR
S4 Pump Station:	-NR-	0.00	0.00		
Clewiston Field Station:	-NR-	0.00	0.00		
S3 Pump Station:	-NR-	0.00	0.00		
S2 Pump Station:	-NR-	0.00	0.00		
S308:	0.00	0.00	1.70	67	
S80:	0.01	0.02	2.52	12	
Okeechobee Average		0.00	0.21		
(Sites S78, S79 and					
Oke Nexrad Basin Avg			2.69		

+ Flow Due to lockages is computed utilizing average daily headwater and

Speedy Point Top Salinity (mg/ml) 838 Speedy Point Bottom Salinity (mg/ml) 545

_ Okeechobee Lake Elevations 090CT16	09 OCT 2016	16.04 Difference from	
090CT16 -1 Day =	08 OCT 2016	16.09 0.05	
090CT16 -2 Days =	07 OCT 2016	16.16 0.12	
090CT16 -3 Days =	06 OCT 2016	15.93 -0.11	
090CT16 -4 Days =	05 OCT 2016	15.90 -0.14	
090CT16 -5 Days =	04 OCT 2016	15.86 -0.18	
090CT16 -6 Days =	03 OCT 2016	15.78 -0.26	
090CT16 -7 Days =	02 OCT 2016	15.75 -0.29	
090CT16 -30 Days =	09 SEP 2016	15.17 -0.87	
090CT16 -1 Year =	09 OCT 2015	14.75 -1.29	
090CT16 -2 Year =	09 OCT 2014	15.69 -0.35	

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = -NR-

\_

	Lake Okeechobee Net Inflow (LONIN)							
	1	Average	Flov	v ove	er the	previous	14 days	Avg-Daily Flow
090CT16	Today	=	09	OCT	2016	12813	MON	-2527
090CT16	-1 Day	=	08	OCT	2016	13528	SUN	-8181
090CT16	-2 Days	=	07	OCT	2016	14964	SAT	56118
090CT16	-3 Days	=	06	OCT	2016	11754	FRI	10695
090CT16	-4 Days	=	05	OCT	2016	11740	THU	10725
090CT16	-5 Days	=	04	OCT	2016	11734	WED	20321
090CT16	-6 Days	=	03	OCT	2016	11608	TUE	14838
090CT16	-7 Days	=	02	OCT	2016	11639	MON	6340
090CT16	-8 Days	=	01	OCT	2016	11700	SUN	10397
090CT16	-9 Days	=	30	SEP	2016	11349	SAT	14828
090CT16	-10 Days	=	29	SEP	2016	10783	FRI	11300
090CT16	-11 Days	=	28	SEP	2016	10506	THU	12947
090CT16	-12 Days	=	27	SEP	2016	10527	WED	8785
090CT16	-13 Days	=	26	SEP	2016	10571	TUE	12793

\_

											_
_											
						Se	55E				
					Average	Flov	v over	previous	14 days	Avg-Daily Flow	
	090CT16		Today	Y=	09	OCT	2016	4608	MON	4112	
	090CT16	-1	Day	=	08	OCT	2016	4719	SUN	4036	
	090CT16	-2	Days	=	07	OCT	2016	4863	SAT	3848	
	090CT16	-3	Days	=	06	OCT	2016	5026	FRI	4045	
	090CT16	-4	Days	=	05	OCT	2016	5173	THU	3956	
	090CT16	-5	Days	=	04	OCT	2016	5346	WED	4066	
	090CT16	-б	Days	=	03	OCT	2016	5482	TUE	4313	
	090CT16	-7	Days	=	02	OCT	2016	5576	MON	4267	
	090CT16	-8	Days	=	01	OCT	2016	5648	SUN	4743	
	090CT16	-9	Days	=	30	SEP	2016	5694	SAT	5317	
	090CT16	-10	Days	=	29	SEP	2016	5723	FRI	5334	
	090CT16	-11	Days	=	28	SEP	2016	5729	THU	5454	
	090CT16	-12	Days	=	27	SEP	2016	5745	WED	5494	
	090CT16	-13	Days	=	26	SEP	2016	5730	TUE	5533	


_					
Lake	Okeechobee	Outlets	Last	14	Days

			S-77	Below S-77	S-78	S-79
			Discharge	Discharge	Discharge	Discharge
			(ALL DAY)	(ALL-DAY)	(ALL DAY)	(ALL DAY)
	DATE	C	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)
09	OCT	2016	14490	12203	13933	-NR-
08	OCT	2016	14341	11109	15004	-NR-
07	OCT	2016	9344	7801	11476	-NR-
06	OCT	2016	6788	8272	10437	-NR-
05	OCT	2016	2707	3928	8043	-NR-
04	OCT	2016	2789	4610	6392	-NR-
03	OCT	2016	7813	12257	12330	-NR-
02	OCT	2016	7620	12274	12544	-NR-
01	OCT	2016	7692	12228	12816	-NR-
30	SEP	2016	6617	11468	13725	-NR-
29	SEP	2016	6156	12111	11867	-NR-
28	SEP	2016	7081	10739	9633	-NR-
27	SEP	2016	7589	10784	8891	-NR-

26	SEP	2010	5 6963	9228	7411	-NR-		
			S-310	S-351	S-352	S-354	L8 Canal Pt	
			Discharge	Discharge	Discharge	Discharge		
			(ALL DAY)	(ALL DAY)	(ALL DAY)	(ALL DAY)	(ALL DAY)	
	DATE	2	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)	
09	OCT			0	0	0	17	
	OCT			0	0	0	-34	
	OCT			0	0	0	-18	
	OCT			0	0	0	2	
	OCT			0	0	0	21	
	OCT			0	0	0	80	
	OCT			0	93	0	237	
	OCT			0	420	0	250	
	OCT			0	0	0	248	
	SEP			0	0	0	234	
	SEP			0	12	0	249	
	SEP			0	103	0	264	
	SEP			0	250	0	261	
26	SEP	2016	5 14	0	16	0	249	
			S-308	Below S-308				
			Discharge	Discharge	Discharg	e		
			(ALL DAY)	(ALL-DAY)	(ALL-DAY	)		
	DATE		(AC-FT)	(AC-FT)	(AC-FT)			
	OCT			5262	5215			
	OCT			4161	6210			
	OCT			1405	-NR-			
	OCT			37	850			
	OCT			124	1396			
	OCT			1214	3348			
	OCT			3938	2936			
	OCT			3927	2844			
	OCT			3842	2815			
	SEP			4804	3218			
	SEP			5737	4226			
	SEP			5970	4650			
	SEP			6125	4748			
26	SEP	2016	5 3197	2978	3250			
***	κ	· תיתי	Diach			tod uging (	billworr Cog	tom Coto
	- 110	)TE:	DISCUS	arge (and day	., is compu	icea using S	Spillway, Sec	LUI GALE
and	1		Lockag	ges Discharge	es from 001	5 hrs to 24	00 hrs.	
_								
(I)	) — E	rlows	s preceeded	d by "I" sigr	nify an ins	tantaneous		
	f	low	computed f	from the sing	gle value r	eported for	the day	

\* On 11 May 1999, Lake Okeechobee Elevation was switched from Instantaneous 2400 value to an average-daily lake average. On 14 Mar 2001, due to the isolation of various gages within the standard
10 stations, the average of the interior 4 station gages was used as the Lake Okeechobee Elevation. On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage mix of interior and edge gages to obtain a more reliable representation of the lake level. On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage mix of interior and edge gages to obtain a more reliable representation of the lake level due to isolation of S135 from low lake levels. Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations ++ For more information see the Jacksonville District Navigation website at http://www.saj.usace.army.mil/ \$ For information regarding Lake Okeechobee Service Area water restrictions please refer to www.sfwmd.gov

Report Generated 100CT2016 @ 09:45 \*\* Preliminary Data - Subject to Revision \*\*

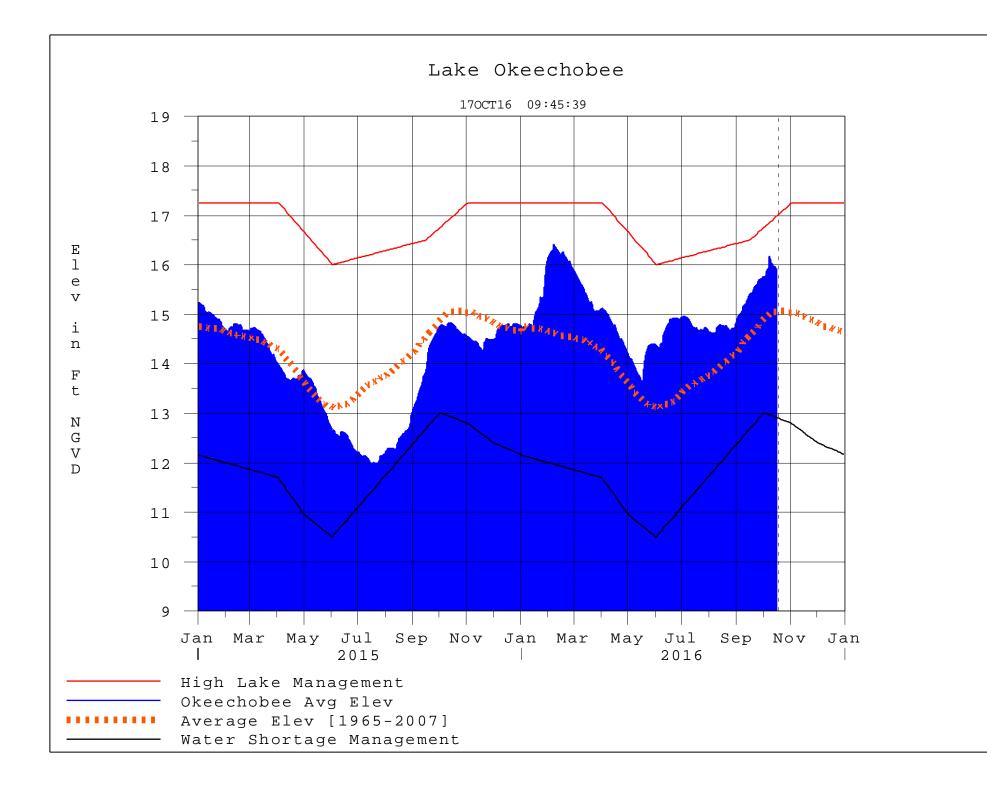

# **Classification Tables**

Supplemental Tables used in conjunction with the LORS2008 Release

Guidance Flow Charts

• Class Limits for Tributary Hydrologic Conditions

Table K-2 in the Lake Okeechobee Water Control Plan

• <u>6-15 Day Precipitation Outlook Categories</u>

Table ?? in the Lake Okeechobee Water Control Plan

<u>Classification of Lake Okeechobee Net Inflow for Seasonal</u>

<u>Outlook</u>

 Table K-3 in the Lake Okeechobee Water Control Plan

• Classification of Lake Okeechobee Net Inflow for Multi-

Seasonal Outlook

 Table K-4 in the Lake Okeechobee Water Control Plan

### Back to Lake Okeechobee Operations Main Page

### Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage

Tributary Hydrologic Classification*	Palmer Index Class Limits	2-wk Mean L.O. Net Inflow Class Limits
Very Wet	3.0 or greater	Greater >= 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

\* use the wettest of the two indicators

### **Classification of Lake Okeechobee Net Inflow Seasonal Outlook**\*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
	[]	Seasonal Outlook
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

\*\*Volume-depth conversion based on average lake surface area of 467,000 acres

### Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook\*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
[	[]	Multi-Seasonal Outlook
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

\*\*Volume-depth conversion based on average lake surface area of 467,000 acres

# 6-15 Day Precipitation Outlook Categories\*

6-15 Day Precipitation Outlook Categories	WSE Decision Tree Categories
Above Normal	Wet to Very Wet
Normal	Normal
Below Normal	Dry

\* Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan

Under Construction