Application of the Lake Okeechobee Regulation Schedule (LORS2008) on 10/24/2016 (ENSO Neutral Condition)

Lake Okeechobee Net Inflow Outlook:

The Lake Okeechobee Net Inflow Outlook has been computed using 4 methods: Croley's method¹, the SFWMD empirical method², a sub-sampling of Neutral years³ and a sub-sampling of warm years of the Atlantic Multi-decadal Oscillation (AMO) in combination with Neutral ENSO years⁴. The results for Croley's method and the SFWMD empirical method are based on the CPC Outlook.

Table of the Lake Okeechobee Net Inflow Outlooks in feet of equivalent depth. All methods are updated on a weekly basis with observed net inflow for the current month.

Season	Croley's Method ^{1*}		SFWMD Empirical Method ²		Sub-sampling of Neutral ENSO Years ³		Sub-sampling of AMO Warm + Neutral ENSO Years ⁴	
	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition	Value (ft)	Condition
Current (Oct- Mar)	N/A	N/A	1.42	Normal	1.79	Wet	2.10	Very Wet
Multi Seasonal (Nov- Oct)	N/A	N/A	2.58	Wet	3.38	Wet	4.57	Very Wet

^{*}Croley's Method Not Produced For This Report

See <u>Seasonal</u> and <u>Multi-Seasonal</u> tables for the classification of Lake Okeechobee Outlooks.

The recommended methods and values for estimating the Lake Okeechobee Net Inflow Outlook are shaded and should be used in the LORS2008 Release Guidance Flow Charts.

Tributary Hydrologic Conditions Graph:

1414 cfs 14-day running average for Lake Okeechobee Net Inflow through 10/23/2016. According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

0.10 for Palmer Index on 10/22/2016.

According to the classification in <u>Tributary Hydrologic Conditions</u> table, this condition is Normal.

The wetter of the two conditions above is **Normal**.

LORS2008 Classification Tables:

Lake Okeechobee Stage on 10/24/2016

Lake Okeechobee Stage: 15.74 feet

USACE Report for Lake Okeechobee

Lake Okeechobee Stage Hydrograph

Lake Okeechob	ee Management	Bottom Elevation	Current
Zone	/Band	(feet, NGVD)	Lake Stage
Lligh Loke Manag	oment Dand	1711	
High Lake Manage	ement Band	17.11	
	High sub-band	16.74	
Operational Band	Intermediate sub-band	16.15	
	Low sub-band	14.50	← 15.74
Base Flow sub-ba	nd	12.90	
Beneficial Use sub	o-band	12.85	
Water Shortage M	lanagement Band		

Part C of LORS2008: Discharge to WCA's

Release Guidance Flow Chart Outcome: Up to maximum practicable releases to the WCAs if desirable or with minimum everglades impacts; otherwise no releases.

Part D of LORS2008: Discharge to Tidewater

Release Guidance Flow Chart Outcome: S-79 up to 3000 cfs and S-80 up to 1170 cfs

Technical Input Summaries from:

- Lake Okeechobee Division
- Coastal Ecosystems
- Everglades Ecosystems Division
- Water Supply Department
- Water Resource Management Release Recommendation
- Kissimmee Watershed Environmental Conditions
- Operations Department

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers LORSS Homepage

LORS2008 Implementation on 10/24/2016 (ENSO Neutral Condition):

Status for week ending 10/24/2016:

District wide, Raindar rainfall was 0.98 inches for the week. Lake stage on 10/24/2016 was 15.74 ft, down 0.17 ft from last week.

The updated October 2016 SFWMM Dynamic Position Analysis <u>percentile graph</u> for Lake Okeechobee show that the current lake stage is in the Low Operational Sub-Band.

The LORS2008 tributary <u>indices</u> are classified as **Normal**. The PDSI indicates normal condition and the LONIN is Normal. The classification is based on the wetter of the two.


Water Supply Risk Evaluation

TTULO	Supply Kisk Evaluation		
Area	Indicator	Value	Color Coded Scoring Scheme
	Projected LOK Stage for the next two months	Low Sub-Band	L
	Palmer Index for LOK Tributary Conditions	0.10 (Normal)	L
	CPC Precipitation Outlook	1 month: Below Normal	М
LOK	CFC Frecipitation Outlook	3 months: Below Normal	M
	LOK Seasonal Net Inflow Outlook ENSO Neutral Years	1.79 ft (Normal to Extremely Wet)	L
	LOK Multi-Seasonal Net Inflow Outlook	3.38 ft (Wet)	L
	ENSO Neutral Years		
	WCA 1: Site 1-7, Site 1-8T, & Site 1-9 Average	Above Line 1 (16.96 ft)	L
WCAs	WCA 2A: Site 2-17 HW	Above Line1 (13.41 ft)	L
	WCA-3A: 3 Station Average (Site 63, 64 and 65)	Above Line 1 (10.66 ft)	L
	Service Area 1	Year-Round Irrigation Rule in effect	L
LEC	Service Area 2	Year-Round Irrigation Rule in effect	L
	Service Area 3	Year-Round Irrigation Rule in effect	L

Note: The water supply risk classification based on the Palmer index, as well as the LOK seasonal and multi-seasonal net inflow outlooks use slightly different classification intervals than those used by the 2008-LORS.


Back to Lake Okeechobee Operations Main Page
Back to U.S. Army Corps of Engineers LORSS Homepage

Lake Okeechobee SFWMM October 2016 Position Analysis

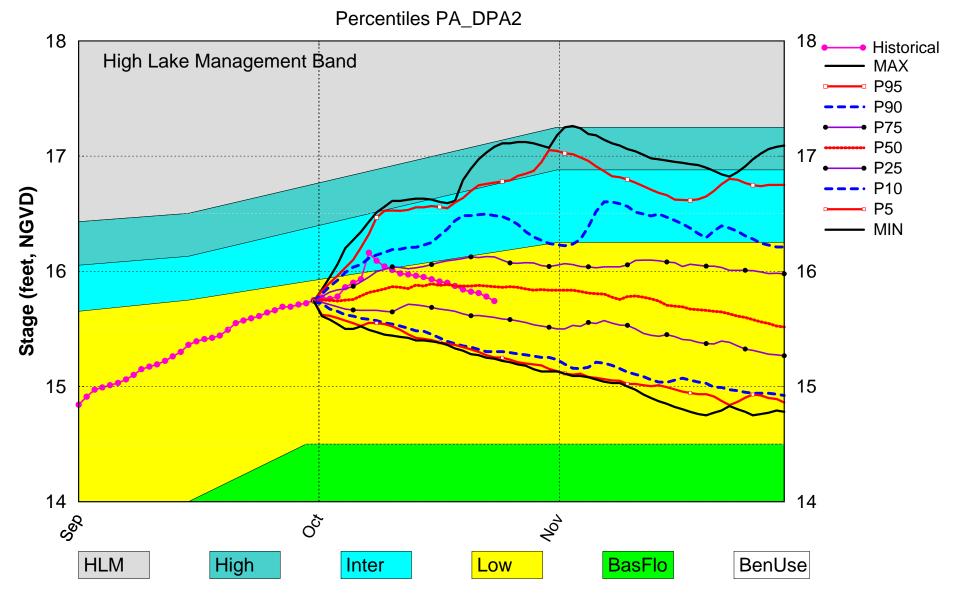

(See assumptions on the Position Analysis Results website)

Tributary Basin Condition Indicators as of October 24 2016

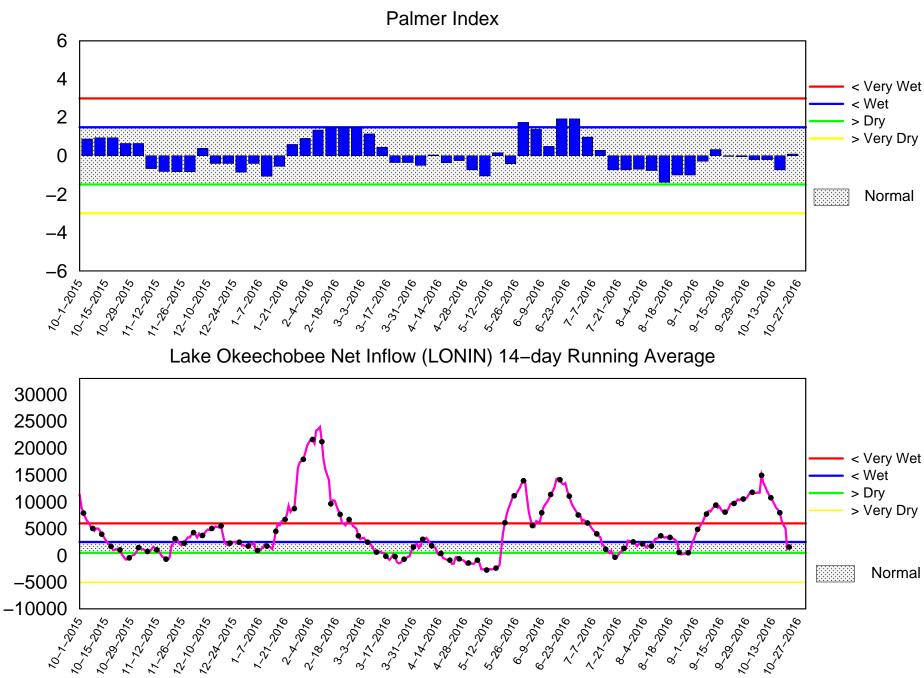


Mon Oct 24 15:45:13 EDT 2016

-low (cfs)


2008 LORS


Part C: Establish Allowable Lake Okeechobee Releases to the Water Conservation Areas

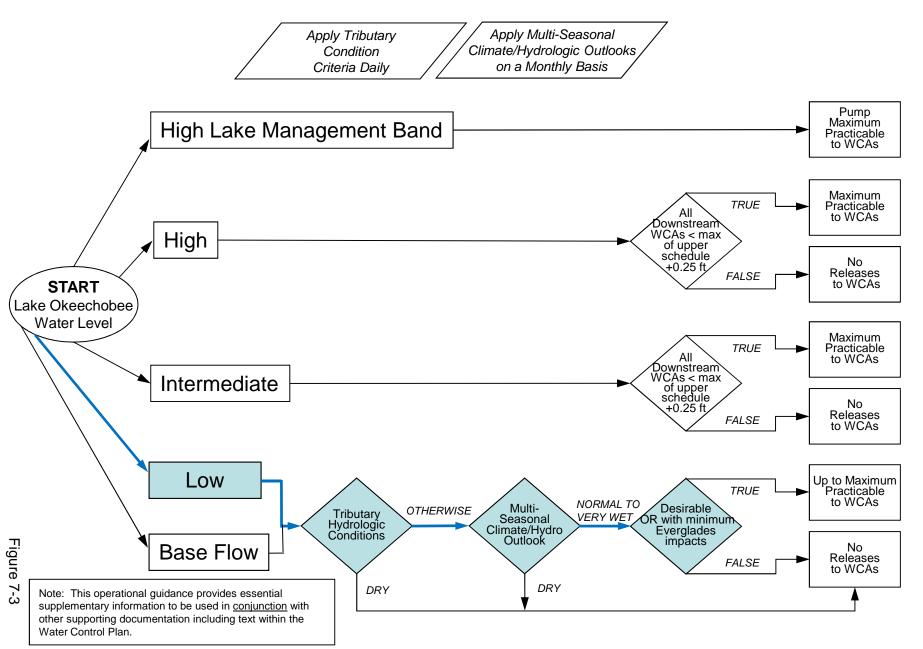

2008 LORS

Part D: Establish Allowable Lake Okeechobee Releases to Tide (Estuaries)

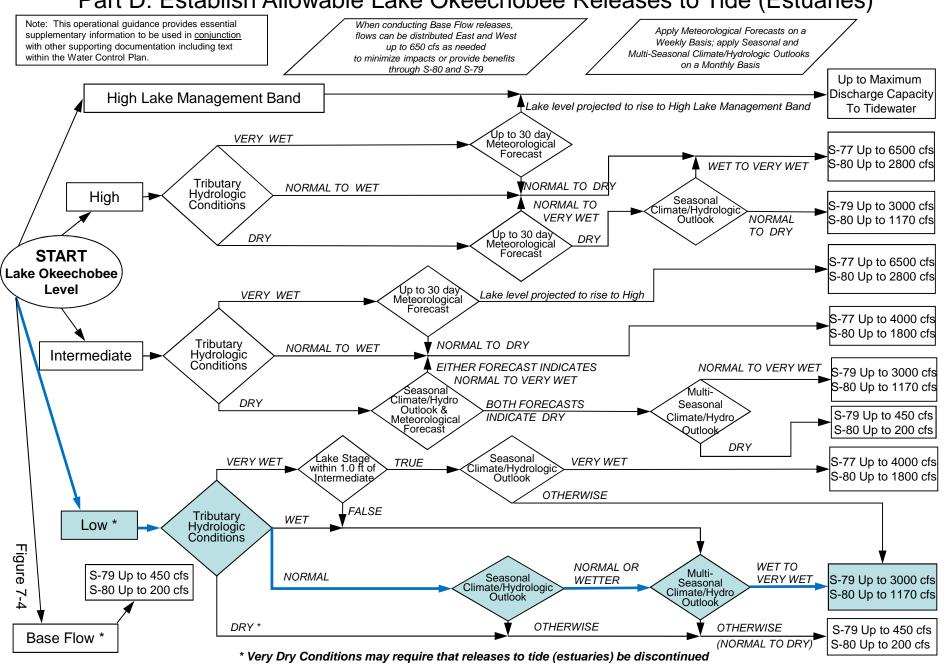

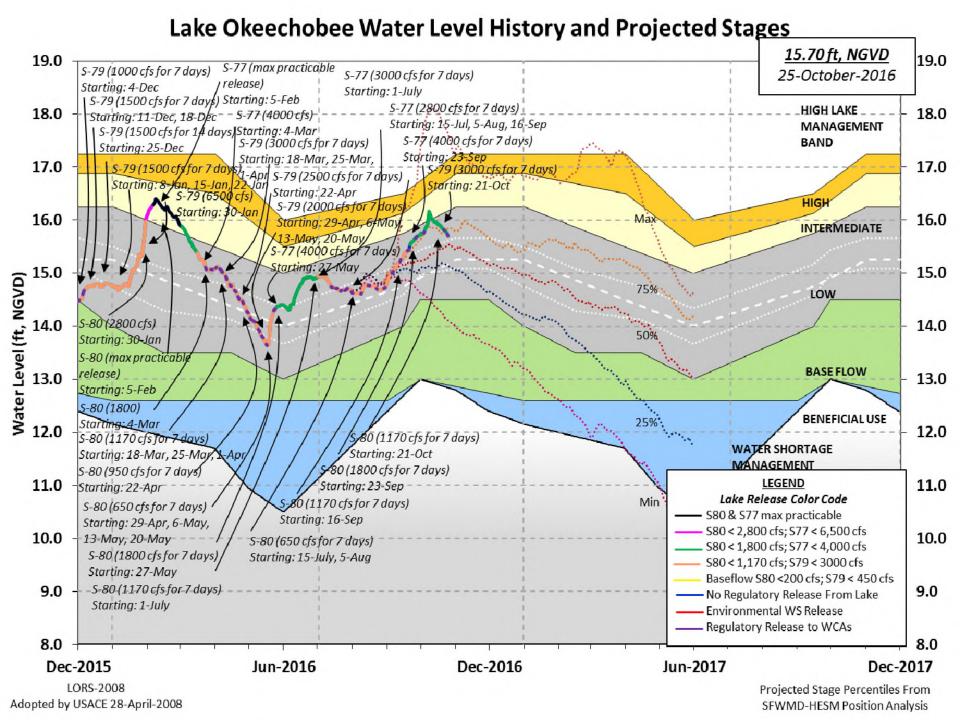

Data Ending 2400 hours 23 OCT 2016

	levation Last Et-NGVD) (ft-1	Year 2YRS Ago NGVD) (ft-NGVD)	
*Okeechobee Lake Elevation Bottom of High Lake Mngmt= 17.11 Currently in Operational Manager	15.74 1. l Top of Water	4.66 15.99 (Off	icial Elv) 55
Simulated Average LORS2008 [1969 Difference from Average LORS2008			
230CT (1965-2007) Period of Reco		15.07 0.67	
Today Lake Okeechobee elevation stations	is determined :	from the 4 Int & 4	Edge
++Navigation Depth (Based on 200)7 Channel Cond	ition Survey) Rout	e 1 ÷
9.68'	,, 0110111101 001101		.5
++Navigation Depth (Based on 200)8 Channel Cond	ition Survey) Rout	e 2 ÷
7.88'			
Bridge Clearance = 49.62'			
_			
4 Interior and 4 Edge Okeechobee I	Lake Average (A	vg-Daily values):	
L001 L005 L006 LZ40 S4	g2F2 g200	g122	
L001 L005 L006 LZ40 S4 15.49 15.79 15.81 15.75 15.9	S352 S308 90 15.92 15.0		
13.13 13.73 13.01 13.73 13.3	,0 13.72 13.	09 13.32	
*Combination Okeechobee Avg-Dail	ly Lake Average		
		(*See Note)	
- Okeechobee Inflows (cfs):			
S65E 1836 C5	-116	Fisheating Cr	179
S65E 1836 C5 S154 17 S191	61	S135 Pumps	0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt	61 umps 0	S135 Pumps S2 Pumps	0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt	61 umps 0 umps 0	S135 Pumps S2 Pumps S3 Pumps	0 0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt S71 0 S129 Pt	61 umps 0 umps 0	S135 Pumps S2 Pumps	0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt	61 umps 0 umps 0	S135 Pumps S2 Pumps S3 Pumps	0 0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt S71 0 S129 Pt S72 0 S131 Pt Total Inflows: 2314	61 umps 0 umps 0	S135 Pumps S2 Pumps S3 Pumps	0 0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt S71 0 S129 Pt S72 0 S131 Pt Total Inflows: 2314 Okeechobee Outflows (cfs):	dimps 0 cmps 0 cmps 0 cmps 0	S135 Pumps S2 Pumps S3 Pumps S4 Pumps	0 0 0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt S71 0 S129 Pt S72 0 S131 Pt Total Inflows: 2314 Okeechobee Outflows (cfs): S135 Culverts 0 S354	61 umps 0 umps 0 umps 0 umps 0	S135 Pumps S2 Pumps S3 Pumps S4 Pumps	0 0 0 0
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt S71 0 S129 Pt S72 0 S131 Pt Total Inflows: 2314 Okeechobee Outflows (cfs): S135 Culverts 0 S354 S127 Culverts 0 S351	61 umps 0 umps 0 umps 0 umps 0	S135 Pumps S2 Pumps S3 Pumps S4 Pumps S77 S77Below	0 0 0 0 -NR- 3219
S65E 1836 C5 S154 17 S191 S84 0 S133 Pt S84X 337 S127 Pt S71 0 S129 Pt S72 0 S131 Pt Total Inflows: 2314 Okeechobee Outflows (cfs): S135 Culverts 0 S354 S127 Culverts 0 S351 S129 Culverts 0 S352	61 umps 0 umps 0 umps 0 umps 0	S135 Pumps S2 Pumps S3 Pumps S4 Pumps	0 0 0 0

****S77 Structure outflow is being used to compute Total Outflow.

****S308 Structure outflow is being used to compute Total Outflow.

Okeechobee Pan Evaporation (inches):

S77 0.18 S308 0.29

Average Pan Evap x 0.75 Pan Coefficient = 0.18" = 0.01'

Lake Average Precipitation using NEXRAD: = 0.00" = 0.00'

Evaporation - Precipitation: = 0.18" = 0.01'

Evaporation - Precipitation using Lake Area of 730 square miles is equal to 3460 cfs out of the lake.

Lake Okeechobee (Change in Storage) Flow is -8672 cfs or -17200 AC-FT

_

_

Note: Headwater, tailwater, and stage values below are instantaneous values unless otherwise specified.

	Headwater	Tailwater				Gat	ce Pos	sition	ns	
#0	Elevation	Elevation	Disch	#1	#2	#3	#4	#5	#6	#7
#8	(ft-msl)	(ft-msl)	(cfs)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
(ft)		(т) see r	note at	· hott	- Om				
North East S	hore	(1) See I	iote at	, DOC	20111				
S133 Pumps S193:		15.51	0	0	0	0	0	0	(cfs)
S191:	19.32	15.54	61	0.0	0.0	0.0				
S135 Pumps	: 13.43	15.60	0	0	0	0	0		(cfs)
S135 Culve	rts:		0	0.0	0.0					
North West S	hore									
S65E:	20.92	15.35	1836	1.0	1.0	0.6	0.6	0.6	0.6	
S127 Pumps		15.60	0	-NR-	0	0	0	0	(cfs)
S127 Culve:	rt:		0	0.0						
S129 Pumps	: 13.05	15.75	0	0	0	0			(cfs)
S129 Culve:	rt:		0	0.0						
	10.00	4							, ,	
S131 Pumps		15.77	0	0	0				(cfs)
S131 Culve	rt:		0							
Fisheating	Creek									
nr Palmd		31.11	179							
nr Lakep	ort									
C5:	15.74	15.78 -	116	5.3 5	5.3 5	5.3				
South Shore										
S4 Pumps:	10.93	15.96	0	0	0	0			(cfs)
S169:	14.77	10.91	56	0.0					(СТВ	/
	•									

```
    S310:
    15.84
    59

    S3 Pumps:
    10.80
    15.98
    0
    0
    0
    0

    S354:
    15.98
    10.80
    50
    0.0
    0.0

    S2 Pumps:
    10.74
    15.98
    0
    0
    0
    0

    S351:
    15.98
    10.74
    390
    0.0
    0.2
    0.0

    15.98
    10.78
    91
    0.1
    0.2

                                            0 0 0
                                                                      (cfs)
                                           0 0 0 0
                                                                     (cfs)
              15.89
                        10.78
                                    91 0.1 0.2
  C10A:
               -NR-
                        13.73
                                           0.0 0.0 2.0 0.0 0.0
  L8 Canal PT
                          13.54
                                    74
                   S351 and S352 Temporary Pumps/S354 Spillway
                         15.98 390 -NR--NR--NR--NR--NR-
15.89 91 -NR--NR--NR-
  S351:
               10.74
  S352:
               10.78
                                    50 -NR--NR--NR--NR-
  S354:
               10.80
                          15.98
Caloosahatchee River (S77, S78, S79)
S47B: 12.66 10.68 0.0 0.0
  S47D:
               10.77
                        10.77 39 6.0
  S77:
   Spillway and Sector Flow:
              15.63 10.88
                                    2518 3.0 3.0 3.0 0.0
    Flow Due to Lockages+:
                                   -NR-
  S77 Below USGS Flow Gage
                                 3219
  S78:
    Spillway and Sector Flow:
               10.79 2.85 2240 3.0 0.0 4.0 0.0
    Flow Due to Lockages+:
                                  15
  S79:
    Spillway and Sector Flow:
               2.91 1.39 3066 1.0 2.0 2.0 2.0 1.0 1.0 1.0
1.0
    Flow Due to Lockages+:
                                      6
    Percent of flow from S77
                                    82%
                       (ppm)
    Chloride
                                   48
St. Lucie Canal (S308, S80)
  S308:
    Spillway and Sector Flow:
               15.68 13.88 285 0.0 0.0 0.0 0.0
    Flow Due to Lockages+:
                                     5
  S308 Below USGS Flow Gage 221
         19.10 13.65
                                    0 0.0 0.0
  S153:
  S80:
    Spillway and Sector Flow:
                -NR- -NR-
                                   -NR- -NR- -NR- -NR- -NR- -NR- -NR-
                                 -NR-
    Flow Due to Lockages+:
    Percent of flow from S308 -NR-%
  Steele Point Top Salinity (mg/ml) ****
  Steele Point Bottom Salinity (mg/ml) ****
```

```
Speedy Point Top Salinity (mg/ml) ****
Speedy Point Bottom Salinity (mg/ml) ****
```

+ Flow Due to lockages is computed utilizing average daily headwater and tailwater along with total number of lockages for the day to calculate a volume which is then converted to an average discharge in cfs.

_				Wi	nd
- Daily Precipitation Totals	1-Day	3-Day	7-Day	Directio	n
Speed	-	-	-		
-	(inches)	(inches)	(inches)	(Degø)	
(mph)				_	
S133 Pump Station:	-NR-	0.00	0.00		
S193:	-NR-	0.00	0.00	-NR-	-NR-
Okeechobee Field Station:	-NR-	0.00	0.00		
S135 Pump Station:	-NR-	0.00	0.00		
S127 Pump Station:	-NR-	0.00	0.00		
S129 Pump Station:	-NR-	0.00	0.00		
S131 Pump Station:	-NR-	0.00	0.00		
S77:	0.00	0.00	0.01	-NR-	-NR-
S78:	0.00	0.00	0.02	9	3
S79:	0.00	0.00	0.00	164	3
S4 Pump Station:	-NR-	0.00	0.00		
Clewiston Field Station:	-NR-	0.00	0.00		
S3 Pump Station:	-NR-	0.00	0.00		
S2 Pump Station:	-NR-	0.00	0.00		
S308:	0.00	0.00	0.08	270	0
S80:	-NR-	0.00	0.14	-NR-	-NR-
Okeechobee Average	0.00	0.00	0.01		
(Sites S78, S79 and	S80 not inc	cluded)			
Oke Nexrad Basin Avg	0.00	0.00	0.03		

- Okeechobee Lake Elevations	23 OCT 2016	15.74 Differ	rence from
230CT16			
230CT16 -1 Day =	22 OCT 2016	15.78	0.04
230CT16 -2 Days =	21 OCT 2016	15.81	0.07
230CT16 -3 Days =	20 OCT 2016	15.82	0.08
230CT16 - 4 Days =	19 OCT 2016	15.84	0.10
230CT16 -5 Days =	18 OCT 2016	15.87	0.13
230CT16 -6 Days =	17 OCT 2016	15.90	0.16
230CT16 - 7 Days =	16 OCT 2016	15.91	0.17
230CT16 - 30 Days =	23 SEP 2016	15.61	-0.13
230CT16 -1 Year =	23 OCT 2015	14.66	-1.08
230CT16 - 2 Year =	23 OCT 2014	15.99	0.25

Long Term Mean 30day Avearge ET for Lake Alfred (Inches) = -NR-

_

Lake Okeechobee Net Inflow (LONIN)

	Average	Flow over the	previous 14 days	Avg-Daily Flow
230CT16	Today =	23 OCT 2016	837 MON	-4631
230CT16	-1 Day =	22 OCT 2016	836 SUN	-2902
230CT16	-2 Days =	21 OCT 2016	604 SAT	2314
230CT16	-3 Days =	20 OCT 2016	5088 FRI	2231
230CT16	-4 Days =	19 OCT 2016	5793 THU	-957
230CT16	-5 Days =	18 OCT 2016	6766 WED	-10
230CT16	-6 Days =	17 OCT 2016	8461 TUE	4571
230CT16	-7 Days =	16 OCT 2016	9316 MON	1476
230CT16	-8 Days =	15 OCT 2016	9722 SUN	3924
230CT16	-9 Days =	14 OCT 2016	10261 SAT	2592
230CT16	-10 Days =	13 OCT 2016	11281 FRI	-NR-
230CT16	-11 Days =	12 OCT 2016	11282 THU	-NR-
230CT16	-12 Days =	11 OCT 2016	11401 WED	-285
230CT16	-13 Days =	10 OCT 2016	12049 TUE	1719

_

_ S65E

		SOOF			
	Average F	low over	previous	14 days	Avg-Daily Flow
230CT16 Today=	23 00	CT 2016	3097	MON	2020
230CT16 - 1 Day =	22 00	CT 2016	3245	SUN	2292
230CT16 -2 Days =	21 00	CT 2016	3368	SAT	2329
230CT16 -3 Days =	20 00	CT 2016	3476	FRI	2446
230CT16 -4 Days =	19 00	CT 2016	3590	THU	2581
230CT16 -5 Days =	18 00	CT 2016	3688	WED	2722
230CT16 -6 Days =	17 00	CT 2016	3784	TUE	2602
230CT16 -7 Days =	16 00	CT 2016	3906	MON	3090
230CT16 -8 Days =	15 00	CT 2016	3990	SUN	3165
230CT16 -9 Days =	14 00	CT 2016	4103	SAT	3486
230CT16 -10 Days =	13 00	CT 2016	4234	FRI	3828
230CT16 -11 Days =	12 00	CT 2016	4342	THU	4184
230CT16 -12 Days =	11 00	CT 2016	4432	WED	4251
230CT16 -13 Days =	10 00	CT 2016	4521	TUE	4362

Lake Okeechobee Outlets Last 14 Days

				_		
			S-77	Below S-77	S-78	S-79
			Discharge	Discharge	Discharge	Discharge
			(ALL DAY)	(ALL-DAY)	(ALL DAY)	(ALL DAY)
	DATE	3	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)
23	OCT	2016	-NR-	6384	4471	6092
22	OCT	2016	4452	5724	4491	6105
21	OCT	2016	5 5513	6644	5102	6466
20	OCT	2016	7764	9592	6478	8982
19	OCT	2016	7577	8132	7795	7236
18	OCT	2016	8181	10219	7877	10169
17	OCT	2016	8394	11001	8430	10217
16	OCT	2016	8307	10795	8720	10921
15	OCT	2016	8365	11470	9203	10987
14	OCT	2016	10099	12043	9313	10280
13	OCT	2016	12825	-NR-	11537	12355
12	OCT	2016	13048	12501	12001	12223
11	OCT	2016	13026	9953	12783	13507

			S-310	S-351	S-352	S-354	L8 Canal Pt
			Discharge	Discharge	Discharge	Discharge	Discharge
			(ALL DAY)				
	DATE	C	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)	(AC-FT)
23	OCT	2016	116	773	180	89	147
22	OCT	2016	211	704	145	0	148
21	OCT	2016	103	541	145	0	147
20	OCT	2016	106	1037	182	254	140
19	OCT	2016	15	833	123	159	144
18	OCT	2016	-8	0	337	686	141
17	OCT	2016	-18	0	0	0	133
16	OCT	2016	-16	0	0	0	128
15	OCT	2016	-3	0	0	0	124
14	OCT	2016	3	0	0	0	130
13	OCT	2016	5 9	0	0	0	88
12	OCT	2016	-3	0	0	0	2
11	OCT	2016	-13	0	0	0	6
10	OCT	2016	4	0	0	0	3

10 OCT 2016 13465 12527 13584 15462

			S-308	Below S-308	S-80
			Discharge	Discharge	Discharge
			(ALL DAY)	(ALL-DAY)	(ALL-DAY)
	DATE	C	(AC-FT)	(AC-FT)	(AC-FT)
23	OCT	2016	576	438	-NR-
22	OCT	2016	608	422	-NR-
21	OCT	2016	1742	1411	-NR-
20	OCT	2016	1896	1817	2370
19	OCT	2016	1812	1609	1089
18	OCT	2016	1708	1494	923
17	OCT	2016	2545	2229	1278
16	OCT	2016	583	601	559
15	OCT	2016	416	486	1176
14	OCT	2016	4517	1564	-NR-
13	OCT	2016	4228	1218	-NR-
12	OCT	2016	1866	-NR-	1309
11	OCT	2016	2985	2573	2214
10	OCT	2016	4679	4374	3427

*** NOTE: Discharge (ALL DAY) is computed using Spillway, Sector Gate and

Lockages Discharges from 0015 hrs to 2400 hrs.

(I) - Flows preceded by "I" signify an instantaneous flow computed from the single value reported for the day

from computed from the single value reported for the day

^{*} On 11 May 1999, Lake Okeechobee Elevation was switched from Instantaneous 2400 value to an average-daily lake average.

On 14 Mar 2001, due to the isolation of various gages within the standard

¹⁰ stations, the average of the interior 4 station gages was used as the Lake Okeechobee Elevation.

On 05 November 2010, Lake Okeechobee Elevation was switched to a 9 gage

mix of interior and edge gages to obtain a more reliable representation of the lake level.


On 09 May 2011, Lake Okeechobee Elevation was switched to a 8 gage mix of interior and edge gages to obtain a more reliable representation of the lake level due to isolation of S135 from low lake levels.

Today Lake Okechobee elevation is determined from the 4 Int & 4 Edge stations

- ++ For more information see the Jacksonville District Navigation website at http://www.saj.usace.army.mil/
- \$ For information regarding Lake Okeechobee Service Area water restrictions

please refer to www.sfwmd.gov

Report Generated 24OCT2016 @ 14:40 ** Preliminary Data - Subject to Revision **

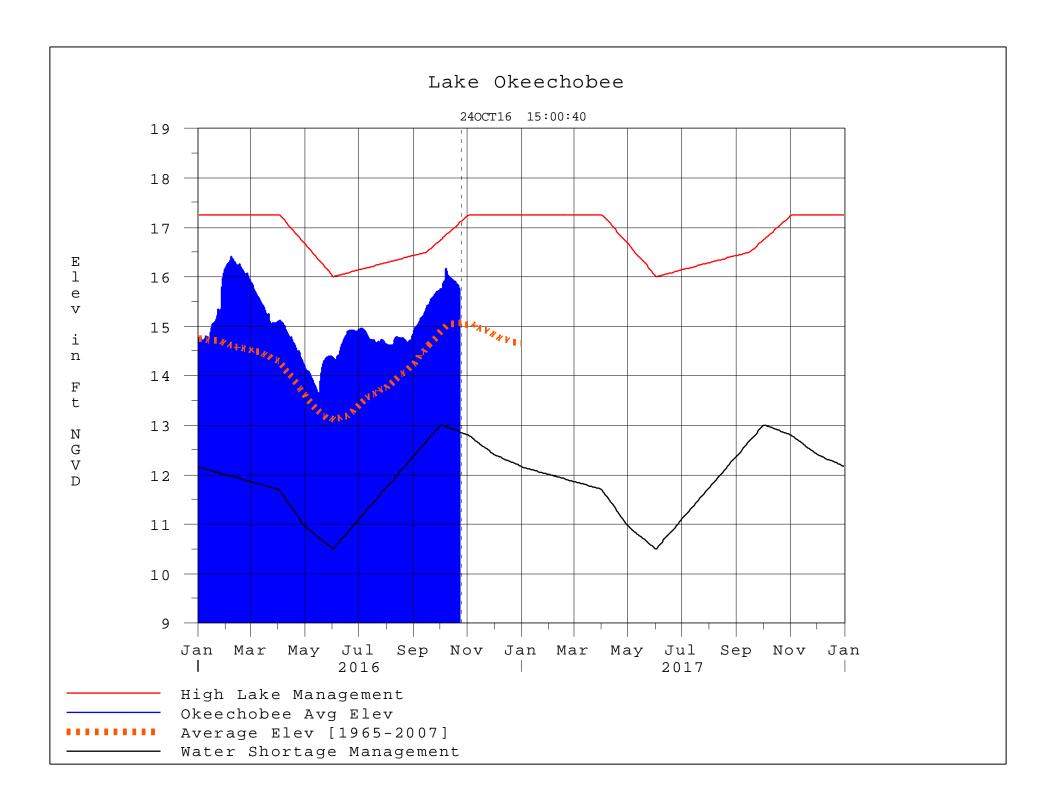

Classification Tables

Supplemental Tables used in conjunction with the LORS2008

Release

Guidance Flow Charts

• Class Limits for Tributary Hydrologic Conditions

Table K-2 in the Lake Okeechobee Water Control Plan

• 6-15 Day Precipitation Outlook Categories

Table ?? in the Lake Okeechobee Water Control Plan

• Classification of Lake Okeechobee Net Inflow for Seasonal

Outlook

Table K-3 in the Lake Okeechobee Water Control Plan

Classification of Lake Okeechobee Net Inflow for Multi-

Seasonal Outlook

Table K-4 in the Lake Okeechobee Water Control Plan

Back to Lake Okeechobee Operations Main Page

Back to U.S. Army Corps of Engineers Lake Okeechobee Operations Homepage

Tributary Hydrologic	Palmer Index	2-wk Mean L.O. Net
Classification*	Class Limits	Inflow Class Limits
Very Wet	3.0 or greater	Greater >= 6000 cfs
Wet	1.5 to 2.99	2500 - 5999 cfs
Near Normal	-1.49 to 1.49	500 - 2499 cfs
Dry	-2.99 to -1.5	-5000 – 500 cfs
Very Dry	-3.0 or less	Less than -5000 cfs

^{*} use the wettest of the two indicators

Classification of Lake Okeechobee Net Inflow Seasonal Outlook*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
[[1000]	Seasonal Outlook
> 0.93	> 2.0	Very Wet
0.71 to 0.93	1.51 to 2.0	Wet
0.35 to 0.70	0.75 to 1.5	Normal
< 0.35	< 0.75	Dry

^{**}Volume-depth conversion based on average lake surface area of 467,000 acres

Classification of Lake Okeechobee Net Inflow Multi-Seasonal Outlook*

Lake Net Inflow Prediction	Equivalent Depth**	Lake Okeechobee
[million acre-feet]	[feet]	Net Inflow
		Multi-Seasonal Outlook
> 2.0	> 4.3	Very Wet
1.18 to 2.0	2.51 to 4.3	Wet
0.5 to 1.17	1.1 to 2.5	Normal
< 0.5	< 1.1	Dry

^{**}Volume-depth conversion based on average lake surface area of 467,000 acres

6-15 Day Precipitation Outlook Categories*

6-15 Day Precipitation Outlook Categories	WSE Decision Tree Categories
Above Normal	Wet to Very Wet
Normal	Normal
Below Normal	Dry

^{*} Corresponds to Table 7-6 in the Lake Okeechobee Water Control Plan

Under Construction