Settlement Agreement Report

First Quarter January - March 2017

Prepared for the Technical Oversight Committee

July 10, 2017



Shark River Slough compliance results are published annually in this report when the final approved flow data for a federal water year (WY) are available. The WY 2017 (October 1, 2016 – September 30, 2017) results will be published at that time.

Prepared by:

Cheol Mo, Violeta Ciuca, and Jonathan P. Madden

Compliance Assessment and Reporting Section Water Quality Bureau South Florida Water Management District 3301 Gun Club Road West Palm Beach, FL 33406

PURPOSE

The South Florida Water Management District has prepared this report to provide a quarterly update to the Everglades Technical Oversight Committee on the compliance status with total phosphorus levels or limits defined in the 1991 Settlement Agreement, entered as a Consent Decree in 1992, and modified in 1995. The areas of interest in this report include the interior marsh stations in the Arthur R. Marshall Loxahatchee National Wildlife Refuge and two discharges to Everglades National Park: inflows to Shark River Slough and inflows to Taylor Slough and Coastal Basins.

CONTENTS

Executive Summary	1
Arthur R. Marshall Loxahatchee National Wildlife Refuge	
Background	
Reporting Period Update	
Everglades National Park	7
Shark River Slough	
Background	
Reporting Period Update	
Taylor Slough and Coastal Basins	10
Background	10
Reporting Period Update	

APPENDICES

Appendix A	Monthly Total Phosphorus Concentration Data for the Arthur R. Marshall	
	Loxahatchee National Wildlife Refuge	A-1
Appendix B	Weekly Grab Total Phosphorus Concentration Data for Shark River Slough.	B - 1
Appendix C	Weekly Grab Total Phosphorus Concentration Data for Taylor Slough and	
	Coastal Basins	C-1
Appendix D	Calculation Methods	D - 1
Appendix E	Document Revisions	E-1

TABLES

Table 1.	First quarter 2017 TP compliance for the Refuge and Taylor Slough and Coastal	L
	Basins and provisional first quarter 2017 calculation results for Shark River	
	Slough.	1
Table 2.	Refuge TP compliance tracking	6
	Taylor Slough and Coastal Basins TP compliance tracking	

FIGURES

Figure 1.	Areas of interest	.2
Figure 2.	Refuge water quality sampling and stage measurement stations.	.4
Figure 3.	(A) Monthly TP geometric mean concentrations for the Refuge compared to	
	calculated long-term levels. (B) Deviation of monthly geometric mean TP	
	concentrations from calculated long-term levels	.5
Figure 4.	ENP flow structures	.9

Figure 5.	The 12-month flow-weighted mean TP concentrations in inflows to ENP through
	Taylor Slough and Coastal Basins at the end of each water year compared to the
	11 ppb long-term TP limit12
Figure 6.	The 12-month flow-weighted mean TP concentrations in inflows to ENP through
	Taylor Slough and Coastal Basins at the end of each month and the
	flow-weighted mean TP concentration for each sampling event12
Figure 7.	Daily flows into ENP as a stacked sum of Taylor Slough (structure S332D) and
	Coastal Basins (structure S18C)
Figure 8.	Daily flows at individual Coastal Basins (S18C) and Taylor Slough (S332D)
	structures into ENP14
Figure 9.	Flow from Taylor Slough and Coastal Basins structures (S332D and S18C) on the
	day of sampling, and the corresponding flow-weighted mean TP concentrations
	for individual sampling events16

ACRONYMS AND ABBREVIATIONS

cfs	cubic feet per second
ENP	Everglades National Park
feet NGVD29	feet relative to the National Geodetic Vertical Datum of 1929
kac-ft	thousand acre-feet
ppb	parts per billion
Refuge	Arthur R. Marshall Loxahatchee National Wildlife Refuge
TOC	Everglades Technical Oversight Committee
TP	total phosphorus
µg/L	micrograms per liter
WCA	Water Conservation Area

EXECUTIVE SUMMARY

This report fulfills the South Florida Water Management District's reporting requirements under the 1991 Settlement Agreement, entered as a Consent Decree in 1992 and modified in 1995, for the first quarter of 2017 (January - March 2017). Total phosphorus (TP) compliance highlights for this period are summarized below for the Arthur R. Marshall Loxahatchee National Wildlife Refuge (Refuge) and inflows to Everglades National Park (ENP) (**Table 1** and **Figure 1**):

- **Refuge:** The geometric mean TP concentrations were below the long-term levels for January, February, and March 2017.
- Shark River Slough: The provisional results of two calculation methods based upon provisional data are presented. The final Water Year (WY) 2017 (October 1, 2016 September 30, 2017) 12-month TP flow-weighted mean concentrations (FWMCs) will be published at a later date when the final approved flow data are available for the current federal water year.
- **Taylor Slough and Coastal Basins:** The TP 12-month FWMCs were below the 12-month long-term limit during the first quarter of 2017.

Mont	Month Geometric Mean TP Concentration (ppb)		Long-term Level (ppb)		Mean Stage (feet NGVD 29)		Number of Samples			
Arthur R. Marshall Loxahatchee National Wildlife Refuge										
Jan 20	17		7.1		9.3	-	16.57		13	
Feb 20	17		4.4		9.6	:	16.52		13	
Mar 20	17		5.7		10.8		16.28		12	
12-Month	12-Month Period Ending (kac-ft)		FW/MTD		Long-term	Limit		of Sampling Events ter than 10 ppb		
					(ppb))	Guideline	e	Observed	
Everglade	s Nation	al Park – S	Shark River Slo	ugh — <i>PR</i> a	OVISIONAL D	ATA and I	RESULTS			
Jan 2017	1231.0	(1234.8)	6.9 (6.9	9)	7.6 (7.6)		40.1 (40.1)		11.5 (11.5)	
Feb 2017	1040.5	(1044.3)	7.3 (7.3	3)	7.7 (7.7)		40.6 (40.5)		11.5 (11.5)	
Mar 2017	824.2	(828.0)	7.7 (7.3	7)	8.8 (8.8)		45.7 (45.6)		12.0 (11.5)	
Everglade	s Nationa	al Park – 1	aylor Slough a	nd Coasta	l Basins					
Jan 2017	38	34.1	5.0		11.0		53.1		0.0	
Feb 2017	37	0.2	5.1		11.0		53.1		0.0	
Mar 2017	34	19.2	5.1		11.0		53.1		0.0	

Table 1. First quarter 2017 TP compliance for the Refuge and Taylor Slough and Coastal Basins and provisional first quarter 2017 calculation results for Shark River Slough.

Notes:

- ppb = parts per billion. Values are actually in µg/L (micrograms per liter), which, for the purposes of this report, are equivalent to ppb.
- feet NGVD29 = elevation in feet relative to the National Geodetic Vertical Datum of 1929.
- kac-ft = thousand acre-feet.
- Compliance for inflows to ENP (Shark River Slough, and Taylor Slough and Coastal Basins) is evaluated annually based on the 12month flow-weighted mean TP concentration for the federal water year ending on September 30.
- Shark River Slough provisional results: Method 1 (left values) computed as S12s+(S333+S355A+S355B-S334) and Method 2 (values in parentheses) computed as S12s+(S333+S355A+S355B+S356-S334) using all flow and TP grabs on biweekly compliance sampling dates. Neither method excludes S334 flow from the total flow for long-term limit calculations.

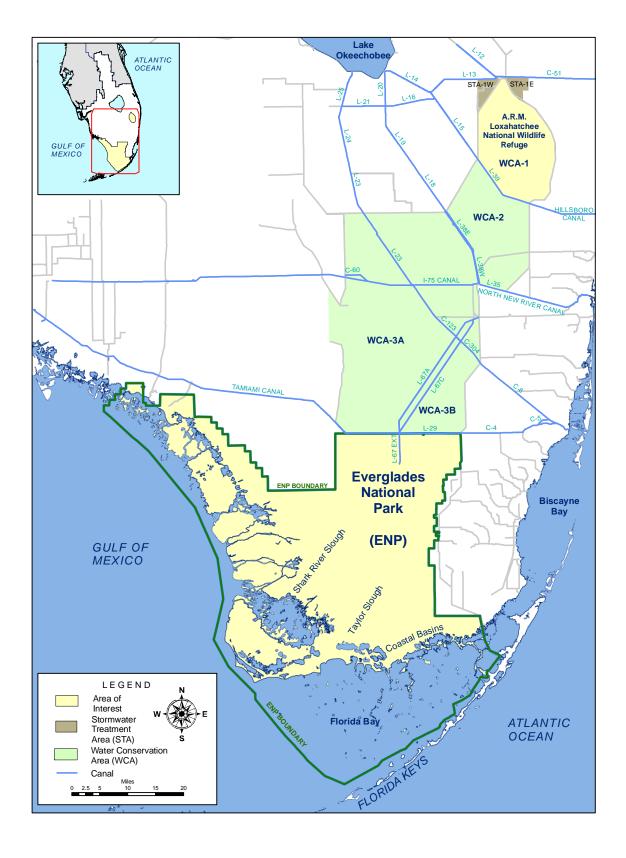


Figure 1. Areas of interest.

ARTHUR R. MARSHALL LOXAHATCHEE NATIONAL WILDLIFE REFUGE

Background

The 1991 Settlement Agreement ended the Everglades lawsuit and was entered into by the federal government, the State of Florida, and the South Florida Water Management District. The subsequent Consent Decree, as modified in 1995, specified that interim and long-term TP concentration levels for the Refuge must be met by February 1, 1999, and December 31, 2006, respectively. Both the interim and long-term concentration levels vary monthly because they are calculated as a function of water stage measured at gaging stations 1-7, 1-8C, and 1-9 within the Refuge. The stage range within which the interim and long-term concentration levels are applicable is 15.42 to 17.14 feet relative to the National Geodetic Vertical Datum of 1929 (NGVD29). The monthly TP concentrations are determined from water samples collected at 14 interior marsh stations, LOX3 through LOX16 (**Figure 2**). As required in the Consent Decree, the concentration level. Monthly TP data for each station for the past 36 months are provided in **Appendix A**. The calculation methods specified in the Consent Decree are provided in **Appendix D**.

Reporting Period Update

The number of stations sampled during the reporting period was: 13 stations in January and February, and 12 stations in March 2017. TP samples were not collected at LOX5 in January and February, and at LOX 3 and LOX 5 in March because the water depth was less than 0.1 meters at those stations. Sampling day average stages in the Refuge were 16.57, 16.52, and 16.28 feet NGVD29 in January, February, and March 2017, respectively (**Figure 3** and **Table 2**). The geometric means calculated from TP concentrations measured in water samples collected in January, February, and March 2017 were 7.1, 4.4, and 5.7 parts per billion (ppb), respectively. The geometric mean TP concentrations were below the long-term level for January, February, and March 2017.

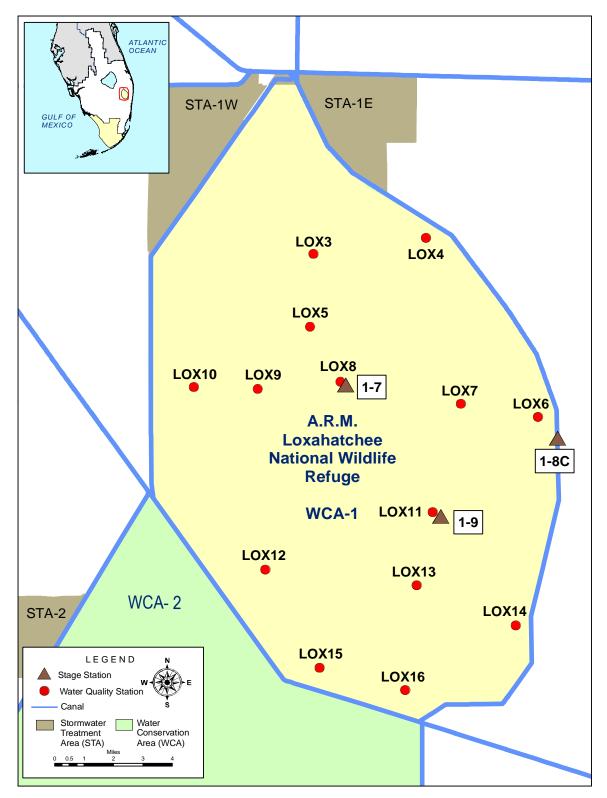


Figure 2. Refuge water quality sampling and stage measurement stations.

4

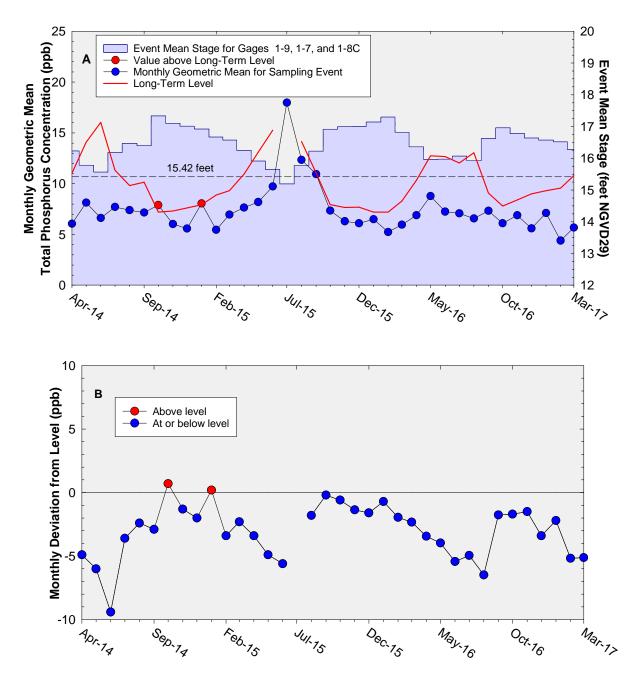


Figure 3. (A) Monthly TP geometric mean concentrations for the Refuge compared to calculated long-term levels, which are adjusted for fluctuations in stage. The geometric mean TP concentrations were above the long-term level in October 2014 and January 2015. The long-term level was not applicable for July 2015 because the sampling event average stage was less than 15.42 feet NGVD29. (**B**) Deviation of monthly geometric mean TP concentrations from calculated long-term levels. Negative values indicate that the geometric mean was lower than the long-term level.

The Everglades Technical Oversight Committee reached a consensus at the October 27, 2015, quarterly meeting on a recommendation that no additional remedies are needed at this time to address the two Refuge excursions that occurred in October 2014 and January 2015.

Table 2. Refuge TP compliance tracking.

Month	Geometric Mean TP Concentration (ppb)			Number of Samples
Apr-2014	6.1	11.0	16.23	12
May-2014	8.1	14.1	15.79	9
Jun-2014	6.6	16.0	15.56	6
Jul-2014	7.7	11.3	16.18	12
Aug-2014	7.4	9.8	16.47	14
Sep-2014	7.2	10.1	16.40	14
Oct-2014	7.9	7.2	17.34	14
Nov-2014	6.0	7.3	17.10	14
Dec-2014	5.6	7.6	17.01	14
Jan-2015	8.1	7.9	16.92	14
Feb-2015	5.5	8.9	16.67	14
Mar-2015	7.0	9.3	16.57	14
Apr-2015	7.6	11.0	16.25	12
May-2015	8.2	13.1	15.91	10
Jun-2015	9.7	15.3	15.65	5
Jul-2015	18.0	NA	15.19	2
Aug-2015	12.3	14.1	15.78	8
Sep-2015	10.9	11.1	16.23	14
Oct-2015	7.4	7.9	16.92	14
Nov-2015	6.3	7.7	17.00	14
Dec-2015 ^b	6.1 (5.9)	7.7 (7.6)	17.00 (17.02)	12 (14)
Jan-2016	6.5	7.2	17.15	14
Feb-2016	5.3	7.2	17.30	14
Mar-2016	6.0	8.3	16.82	14
Apr-2016	6.9	10.3	16.36	14
May-2016	8.8	12.7	15.96	9
Jun-2016	7.2	12.7	15.97	9
Jul-2016	7.1	12.0	16.07	13
Aug-2016	6.6	13.1	15.92	6
Sep-2016	7.3	9.1	16.62	14
Oct-2016	6.1	7.8	16.96	14
Nov-2016	6.9	8.4	16.78	14
Dec-2016	5.6	9.0	16.64	14
Jan-2017	7.1	9.3	16.57	13
Feb-2017	4.4	9.6	16.52	13
Mar-2017	5.7	10.8	16.28	12

Notes:

• ppb = parts per billion. Values are actually in μ g/L (micrograms per liter), which, for the purposes of this report,

is equivalent to ppb.

feet NGVD29 = elevation in feet relative to the National Geodetic Vertical Datum of 1929.
Highlighted rows with bold, italicized text indicate when an excursion over the long-term level occurred.

a. Average stage is calculated using stage elevations at stations 1-7, 1-8C, and 1-9 for a given sampling date.

b. December 2015 values for Refuge including resampled data (at LOX14 and LOX15) are presented in parentheses.

EVERGLADES NATIONAL PARK

Shark River Slough

Background

The Settlement Agreement/Consent Decree (1995) specified that interim and long-term TP concentration limits for discharges into ENP (**Figure 4**) through Shark River Slough be met by October 1, 2003, and December 31, 2006, respectively. It was specified that the TP concentrations be presented as 12-month flow-weighted means. Only the TP concentrations for the water year ending September 30 are evaluated for compliance with the Consent Decree limits (**Appendix D**). The long-term TP concentration limit for inflows to Shark River Slough is represented by concentrations delivered through S12A, S12B, S12C, and S12D during the Outstanding Florida Waters baseline period of March 1, 1978, to March 1, 1979, and is adjusted for variations in flow. Inflow concentrations of TP through S12A, S12B, S12C, S12D, S333, S355A, and S355B are compared to the interim and long-term limits at the end of each water year (October 1 through September 30). The long-term limit went into effect in WY 2007.

The Everglades Technical Oversight Committee (TOC) has recognized that the S356 seepage return pump, which initiated operation under the United States Army Corps of Engineers field test in fall 2015, has the ability to inflow water that originated from the Water Conservation Areas (WCAs) to Shark River Slough. The Appendix A Subteam has been tasked with recommending an appropriate method for incorporating S356 to the compliance calculation. Since adoption of a single appropriate method has not yet been made by the TOC, this report contains results based upon two calculation methods. Method 1 is TP flow-weighted mean concentration (FWMC) computed as S12s + (S333 + S355A + S355B - S334). Method 2 is FWMC computed as S12s + (S333 + S355A + S355B - S334). Method 2 is FWMC compliance sampling dates. Neither method excludes S334 flow from the total flow for long-term limit calculations.

Both results of the alternative methods for the 12-month FWMCs were 7.2 ppb and lower than the long-term limits (both Method 1 and Method 2 were 7.6 ppb) for the 12-month period ending on September 30, 2016. Therefore, inflows to Shark River Slough met the TP limit for WY 2016 (October 1, 2015 – September 30, 2016).

Reporting Period Update

Pursuant to agreement among all TOC members at the May 14, 2013, TOC meeting, the following three changes were made to the quarterly Settlement Agreement Report: 1) publishing of the quarterly 12-month flow-weighted mean TP concentrations for Shark River Slough is discontinued, 2) provisional quarterly 12-month flow-weighted mean TP concentrations are posted separately to the TOC website, <u>https://www.sfwmd.gov/our-work/toc</u>, and 3) the annual 12-month flow-weighted mean TP concentration for the water year ending on September 30 will be published once the final approved flow data for the S12A, S12B, S12C, and S12D structures becomes available. These changes have been implemented beginning with the January – March 2013 first quarter report. Based on a vote by the TOC on July 19, 2016, provisional

12-month results are now included in the Executive Summary of this report. The requested charts and details have not been incorporated into this section.

It is anticipated that the final approved flow data for WY 2017 will be available in April 2018, and the annual 12-month flow-weighted mean TP concentration to determine compliance with the long-term limit will be published as a revision to the July – September 2017 third quarter report.

In addition to the provisional quarterly 12-month FWMCs that are posted separately to the TOC website, the water quality data for Shark River Slough are available in **Appendix B** of this report.

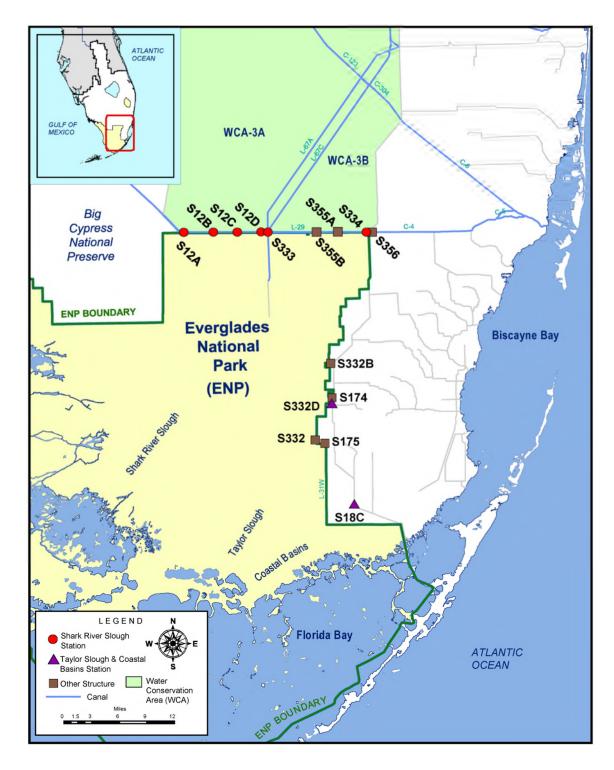


Figure 4. ENP flow structures.

Taylor Slough and Coastal Basins

Background

Under the Consent Decree, a single TP long-term limit of 11 ppb, to be met by December 31, 2006, was set for the two points of inflow to Taylor Slough (S332 and S175) and the inflow point to Coastal Basins (S18C) (see **Appendix C**). The 12-month FWMCs have consistently been lower than the long-term limit of 11 ppb.

Inflow TP concentrations to ENP through Taylor Slough and Coastal Basins are compared to the 11 ppb limit at the end of each water year using data from both the old (S175, S332, and S18C) and new (S174, S332D, and S18C) combinations of structures (**Figure 5**). The narrow bars in **Figure 5** represent the 12-month TP FWMCs from S332, S175, and S18C for WY 1991 through WY 2002. The wider bars for WY 1999 through WY 2016 represent the new combination of structures.

TP and flow data from both sets of structures presented in prior editions of this report through December 2001 (April 2002 report) showed that, beginning in October 2000, the 12-month moving total flow for S332D, S174, and S18C was consistently greater than flow at S332, S175, and S18C. There was also a shift in TP FWMC data whereby S332D, S174, and S18C concentrations became equal to, and then consistently lower than, the concentrations at S332, S175, and S18C. These changes reflected the switch from S332 to S332D for water delivery to Taylor Slough between July 3 and July 5, 2000. Furthermore, the S174 site was plugged in September 2007, preventing any additional flow. Consequently, for WY 2002 through WY 2007, compliance tracking was represented by S332D, S174, and S18C. Since WY 2008, S332D and S18C have represented the compliance tracking structures.

The 12-month TP FWMC (5.3 ppb) was lower than the long-term limit (11.0 ppb) for the 12-month period ending on September 30, 2016. Therefore, inflows to Taylor Slough and Coastal Basins met the TP limit for WY 2016 (October 1, 2015 – September 30, 2016).

Reporting Period Update

Figure 6 presents the 12-month and individual sampling event TP FWMCs at the S332D and S18C structures. All TP grab sample concentrations taken on positive flow days reported for surface water monitoring at the sites were used for the compliance calculations.

The daily flows into ENP through S332D and S18C are presented in **Figures 7** and **8**. For the combined flow through S332D and S18C, the 12-month TP FWMCs for the periods ending January, February, and March 2017, were 5.0, 5.1, and 5.1 ppb, respectively (**Table 3**).

The Consent Decree stipulates that the percent of TP FWMCs greater than 10 ppb from each sampling event in any 12-month period must not exceed the fixed guideline of 53.1 percent. For the 12-month periods ending January, February, and March 2017, there were no sampling event TP concentrations greater than 10 ppb.

Figure 9 shows the relationship between the daily inflows and the corresponding TP FWMCs for each sampling event. The sampling event TP FWMCs generally remained very low. The average of the sampling event TP FWMC was 5.4 ppb in the first quarter.

The United States Army Corps of Engineers authorized the C-111 Spreader Canal project in 1995 to restore more natural hydrologic conditions in Taylor Slough and to maintain flood protection to the east of the L-31N and C-111 canals. The original project facilities consisted of pump stations (S332B, S332C, and S332D), detention cells (Cell 1 through Cell 5), a connector cell between Cell 2 and Cell 3, a flow-way cell originating at Berm B3 of Cell 5, and four diversion structures (DS1 through DS4). Upon completion of a United States Army Corps of Engineers construction project in 2009, an interconnected detention system now exists starting at the S332B west discharge and continuing to the S332D high head cell.

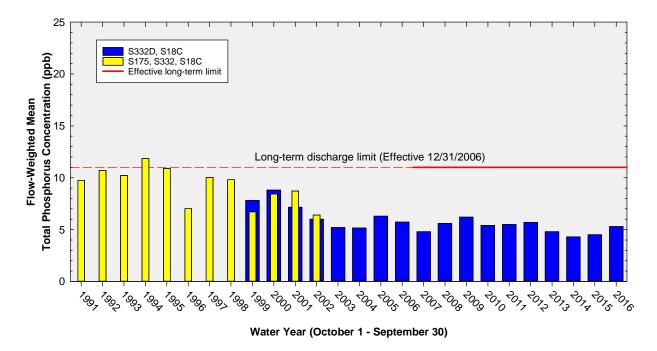


Figure 5. The 12-month flow-weighted mean TP concentrations in inflows to ENP through Taylor Slough and Coastal Basins at the end of each water year compared to the 11 ppb long-term TP limit. Blue bars show S332D, S174, and S18C for WY 1999 through WY 2007, and S332D and S18C from WY 2008 to WY 2016.

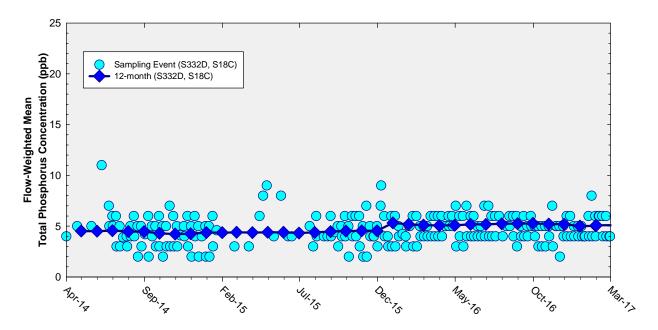


Figure 6. The 12-month flow-weighted mean TP concentrations in inflows to ENP through Taylor Slough and Coastal Basins at the end of each month and the flow-weighted mean TP concentration for each sampling event.

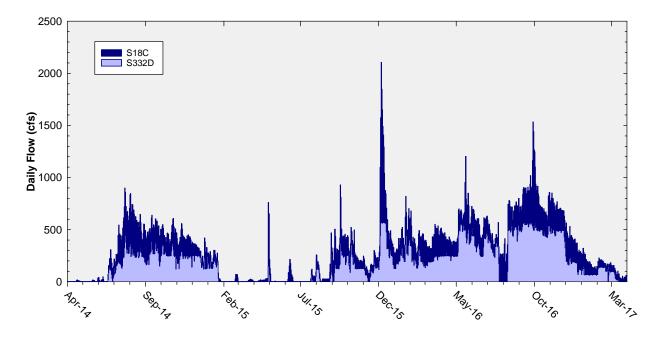


Figure 7. Daily flows into ENP as a stacked sum of Taylor Slough (structure S332D) and Coastal Basins (structure S18C).

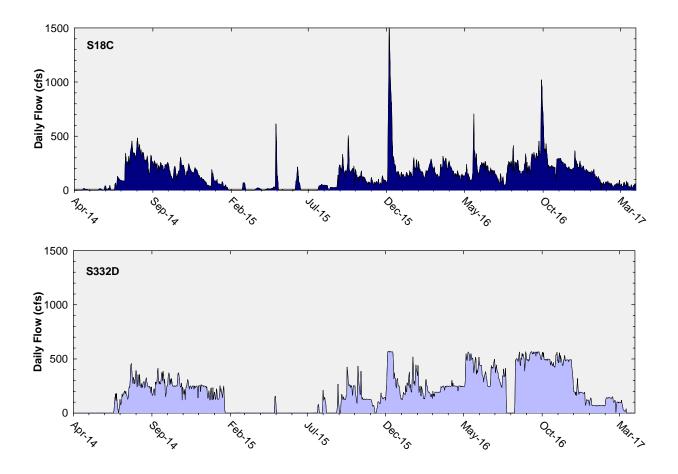


Figure 8. Daily flows at individual Coastal Basins (S18C) and Taylor Slough (S332D) structures into ENP.

12-Month	Total How	Flow-Weighted Mean TP	Long-Term Limit (ppb)	Percent of Sampling Events Greater than 10 ppb			
Period	(kac-ft)	Concentration (ppb)	<i>Effective 12/31/2006</i>	Guideline	Observed		
May 2013 - Apr 2014	246.6	4.5	11.0	53.1	0.0		
Jun 2013 - May 2014	239.9	4.5	11.0	53.1	0.0		
July 2013 - Jun 2014	215.9	4.6	11.0	53.1	1.3		
Aug 2013 - Jul 2014	203.2	4.5	11.0	53.1	1.3		
Sep 2013 - Aug 2014	203.8	4.5	11.0	53.1	1.3		
Oct 2013 - Sep 2014	196.5	4.3	11.0	53.1	1.3		
Nov 2013 - Oct 2014	200.6	4.2	11.0	53.1	1.3		
Dec 2013 - Nov 2014	204.9	4.3	11.0	53.1	1.3		
Jan 2014 - Dec 2014	198.6	4.4	11.0	53.1	1.4		
Feb 2014 - Jan 2015	194.8	4.4	11.0	53.1	1.5		
Mar 2014 - Feb 2015	183.0	4.4	11.0	53.1	1.6		
Apr 2014 - Mar 2015	181.4	4.4	11.0	53.1	1.6		
May 2014 - Apr 2015	184.6	4.4	11.0	53.1	1.6		
Jun 2014 - May 2015	185.2	4.4	11.0	53.1	1.5		
Jul 2014 - Jun 2015	182.9	4.3	11.0	53.1	0.0		
Aug 2014 - Jul 2015	154.4	4.4	11.0	53.1	0.0		
Sep 2014 - Aug 2015	124.1	4.5	11.0	53.1	0.0		
Oct 2014 - Sep 2015	117.8	4.5	11.0	53.1	0.0		
Nov 2014 - Oct 2015	107.3	4.5	11.0	53.1	0.0		
Dec 2014 - Nov 2015	93.1	4.5	11.0	53.1	0.0		
Jan 2014 - Dec 2015	122.4	5.3	11.0	53.1	0.0		
Feb 2015 - Jan 2016	139.4	5.2	11.0	53.1	0.0		
Mar 2015 - Feb 2016	162.2	5.1	11.0	53.1	0.0		
Apr 2015 - Mar 2016	187.2	5.1	11.0	53.1	0.0		
May 2015 - Apr 2016	207.9	5.1	11.0	53.1	0.0		
Jun 2015 - May 2016	247.2	5.2	11.0	53.1	0.0		
Jul 2015 - Jun 2016	278.4	5.2	11.0	53.1	0.0		
Aug 2015 - Jul 2016	300.7	5.2	11.0	53.1	0.0		
Sep 2015 - Aug 2016	330.9	5.2	11.0	53.1	0.0		
Oct 2015 - Sep 2016	361.3	5.3	11.0	53.1	0.0		
Nov 2015 - Oct 2016	391.0	5.2	11.0	53.1	0.0		
Dec 2015 - Nov 2016	423.0	5.2	11.0	53.1	0.0		
Jan 2016 - Dec 2016	399.5	5.0	11.0	53.1	0.0		
Feb 2016 - Jan 2017	384.1	5.0	11.0	53.1	0.0		
Mar 2016 - Feb 2017	370.2	5.1	11.0	53.1	0.0		
Apr 2016 - Mar 2017	349.2	5.1	11.0	53.1	0.0		

Table 3. Taylor Slough and Coastal Basins TP compliance tracking.

Notes:

• kac-ft = thousand acre-feet.

• ppb = parts per billion. Values are actually in μ g/L (micrograms per liter), which, for the purposes of this report, is equivalent to ppb.

• Compliance is evaluated annually based on the 12-month flow-weighted mean TP concentration for the federal water year ending on September 30. The compliance periods are shown as highlighted rows with bold, italicized text.

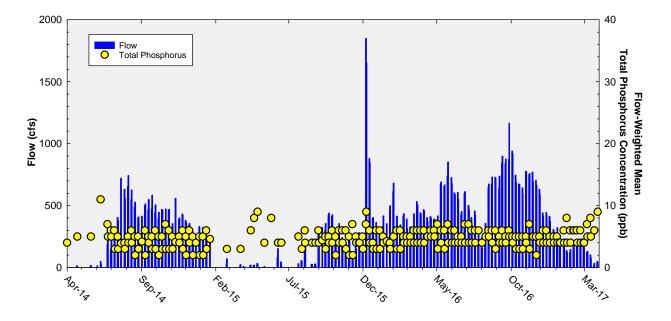


Figure 9. Flow from Taylor Slough and Coastal Basins structures (S332D and S18C) on the days of sampling, and the corresponding flow-weighted mean TP concentrations for individual sampling events.

APPENDIX A

MONTHLY TOTAL PHOSPHORUS CONCENTRATION DATA FOR THE ARTHUR R. MARSHALL LOXAHATCHEE NATIONAL WILDLIFE REFUGE

TP concentration data used in this report can be directly retrieved from the South Florida Water Management District's DBHYDRO database by copying and pasting the following link into the address field of a web browser:

http://my.sfwmd.gov/dbhydroplsql/water_quality_data.report_full?v_where_clause=where+ station_id+like+('LOX%25')+and+station_id+not+like+('LOXA%25')+and+test_number+=+25+a nd+date_collected+>=+'01-JAN-2017'+and+date_collected+<+'01-APR-2017'+and+sample_type_new+=+'SAMP'&v_target_code=file_csv

The link above only generates data that have not been qualified. Qualified water quality data must be retrieved interactively via the DBHYDRO browser.

Stage data for stations 1-7, 1-8C, and 1-9 from the reporting quarter can be retrieved by copying and pasting the following link into the address field of a web browser:

http://my.sfwmd.gov/dbhydroplsql/web_io.report_process?v_period=uspec&v_start_date= 20170101&v_end_date=20170331&v_report_type=format7&v_target_code=file_csv&v_run_mo de=onLine&v_js_flag=Y&v_dbkey=FE775/FE776/FE777

Month-Year	LOX3	LOX4	LOX5	LOX6	LOX7	LOX8	LOX9	LOX10	LOX11	LOX12	LOX13	LOX14	LOX15	LOX16
Apr-2014		6	6	3	7	9	7		7	5	7	6	5	7
May-2014				8	9	10			9	8	8	7	6	9
Jun-2014									7	8	7	6	6	6
Jul-2014		11	11	7	8	13	7		7	7	7	6	5	7
Aug-2014	8	14	8	7	7	8	7	6	6	7	7	7	6	8
Sep-2014	6	11	6	6	6	9	7	7	8	8	8	6	6	8
Oct-2014	8	12	7	6	13	11	8	6	7	8	6	7	7	8
Nov-2014	6	7	7	5	7	8	8	6	5	4	5	6	6	6
Dec-2014	6	7	6	4	7	7	8	6	4	5	6	5	4	5
Jan-2015	9	9	10	6	9	9	9	7	9	8	7	7	7	8
Feb-2015	10	6	9	4	6	9	6	4	5	5	4	5	3	5
Mar-2015	11	9	10	6	7	7	9	4	6	7	6	6	5	8
Apr-2015		7	12	6	8	12	10		6	7	7	8	5	7
May-2015		10		11	7	12			7	7	9	7	6	8
Jun-2015										11	9	14	7	9
Jul-2015	++	++	++		++		++	++		19		17		
Aug-2015		18			9	14			15	12		15	8	11
Sep-2015	13	23	9	16	9	10	10	15	9	12	10	9	7	9
Oct-2015	9	8	12	8	7	7	7	8	6	6	6	5	6	11
Nov-2015	6	6	6	5	7	6	7	7	7	6	7	5	6	8
Dec-2015	5	5	6	5	15	6	5	6	6	6	5	(4)	(6)	7
Jan-2016	8	8	8	6	7	7	6	7	6	7	6	5	5	6
Feb-2016	5	8	6	4	5	7	5	5	5	5	6	4	4	6
Mar-2016	5	6	6	8	7	8	6	7	5	5	4	6	5	7
Apr-2016	8	7	8	7	7	8	8	8	5	8	7	5	5	7
May-2016		0		9	14	10			10	8	8	8	6	8
Jun-2016		15		7	8				7	7	7	8	4	6
Jul-2016	8	12	10	6	6	8	8	7	7	6	7	5	5	
Aug-2016									5	6	7	6	8	8
Sep-2016	10	11	8	5	6	6	9	10	7	8	6	5	6	9
Oct-2016	6	8	4	6	6	5	7	9	5	10	5	6	4	7
Nov-2016	7	12	11	5	8	7	7	14	5	6	5	5	5	6
Dec-2016	7	7	5	4	5	7	5	6	5	5	5	6	5	8
Jan-2017	8	9		5	7	10	7	7	6	7	8	6	6	8
Feb-2017	5	4		4	5	5	5	4	4	5	3	4	4	6
Mar-2017		8		5	7	7	10	8	4	5	5	3	4	6

Notes:

--- indicates sample was not collected due to insufficient water depth.

++ indicates the sampling trip was suspended due to low stage, following the guidance for suspending marsh sampling. (See page 3 for details.)

() LOX14 and LOX15 water quality samples taken on December 2, 2015, were discarded due to processing errors and resampled on December 3, 2015.

APPENDIX B

WEEKLY GRAB TOTAL PHOSPHORUS CONCENTRATION DATA FOR SHARK RIVER SLOUGH

TP concentration data used in this report can be directly retrieved from the South Florida Water Management District's DBHYDRO database by copying and pasting the following link into the address field of a web browser:

http://my.sfwmd.gov/dbhydroplsql/water_quality_data.report_full?v_where_clause=where+ station_id+in+('S12A','S12B','S12C','S12D','S333','S355A','S355B','S356-334')+and+test_number+=+25+and+collect_method+=+'G'+and+date_collected+>=+'01-MAR-2017'+and+date_collected+<+'01-APR-2017'+and+sample_type_new+=+'SAMP'&v_target_code=file_csv

The link only generates data that have not been qualified. Qualified water quality data must be retrieved interactively via the DBHYDRO browser.

The provisional daily mean flow data for stations S12A, S12B, S12C, S12D, S355A, S355B, S355B Temporary Pumps, and S356 and the "Preferred DBKEY" daily mean flow data for stations S333 and S334, during the reporting quarter can be retrieved by copying and pasting the following link into the address field of a web browser:

http://my.sfwmd.gov/dbhydroplsql/web_io.report_process?v_period=uspec&v_start_date=2 0170101&v_end_date=20170331&v_report_type=format7&v_target_code=file_csv&v_run_mod e=onLine&v_js_flag=Y&v_dbkey= 03620/03626/03632/03638/MQ895/MQ896/AM173/64136/15042/FB752

The "Preferred DBKEY" daily mean flow data for S12A, S12B, S12C, and S12D structures will be available for retrieval upon completion of the final approved flow data (expected April 2018).

Date	S12A	S12B	S12C	S12D	S333	S355A	S355B	S356	Remarks
01/04/2016	11		6	8	8			5	N/A
01/05/2016						8	8		N/A
01/11/2016	8		6	6	6			5	Compliance date
01/19/2016	8		4	7	6			6	N/A
01/25/2016	7		5	6	6			7	Compliance date
02/01/2016	5		5	8	7			7	N/A
02/04/2016						7	7		N/A
02/08/2016	6		5	7	6			10	Compliance date
02/15/2016	<u>6</u> 7		4	6	5			6	N/A Compliance date
02/22/2016	6		4	4	6			8	Compliance date
02/29/2016 03/03/2016						6	6		N/A N/A
03/07/2016	7		5	4	5			8	Compliance date
03/14/2016	8		7	8	8			6	N/A
03/17/2016							6		N/A
03/21/2016	11		7	6	8			7	Compliance date
03/28/2016	8		6	6	7		6	8	N/A
04/04/2016	8		6	4	10			8	Compliance date
04/12/2016	8		6	5	8			8	N/A
04/13/2016						6	8		N/A
04/18/2016	9		5	7	8			8	Compliance date
04/25/2016	10		6	7	6			6	N/A
04/26/2016							16		N/A
05/02/2016	8		6	6	10			6	Compliance date
05/09/2016	8		7	6	10	6	11	8	N/A
05/16/2016	12		7	12	10			10	Compliance date
05/23/2016	11		8	12	15	7	14	12	N/A
05/31/2016	15		9	9	11			10	Compliance date
06/06/2016	14		10	14	14	8	11	11	N/A
06/13/2016	14		11	12	15			12	Compliance date
06/20/2016	13		10	12	13			12	N/A
06/27/2016	12		8	9	15			22	Compliance date
07/05/2016	11		6	10	15			13	N/A
07/11/2016	10		7	7	24	8	13	16	Compliance date
07/18/2016	11			12	13			13	N/A
07/25/2016	9		5	7	19			14	Compliance date
08/01/2016	10		7	6	15			17	N/A
08/08/2016	10		7	10	9			10	Compliance date
08/15/2016	7	6	8	10	10			11	N/A
08/22/2016	6	7	8	<u>8</u> 12	<u>10</u> 9	9	<u> </u>	7	Compliance date
08/29/2016 09/06/2016	6 7	6 6	8	12	9	6	9	15	N/A Compliance date
09/12/2016	6	8	9	10	8			15	N/A
09/19/2016	5	5	6	8	7			14	Compliance date
09/26/2016	6	6	7	8	8			11	N/A
10/03/2016	6	5	5	8	7	5	6	9	Compliance date
10/10/2016	5	5	5	7	7			10	N/A
10/17/2016	5	6	6	, 7	7			9	Compliance date
10/24/2016	4	3	4	5	6			9	N/A
10/31/2016	4	4	4	7	7			8	Compliance date
11/07/2016	10	7	6	8	7			14	N/A
11/14/2016	9	6	6	7	7	5	6	9	Compliance date
11/21/2016	8	5	2	7	6			8	N/A
11/28/2016	8		6	7	7			7	Compliance date
12/05/2016	8				7			9	N/A
12/12/2016	13				9	8	8	8	Compliance date
12/19/2016	14				11			7	N/A
12/27/2016	9				10			8	Compliance date
01/03/2017	7				6			6	N/A
01/09/2017	6				10	7	5	6	Compliance date
01/17/2017	7			5	7			6	N/A
01/23/2017	12			7	6			8	Compliance date
01/30/2017	10			9	9			8	N/A
02/01/2017					8				Compliance date
02/06/2017	10				8	8	6	9	N/A
02/13/2017	18			6	7			10	Compliance date
02/20/2017	14				8			9	N/A
02/28/2017	11				7			8	Compliance date
03/06/2017	13				8			11	N/A
03/13/2017	18				8			10	Compliance date
03/20/2017	18				9	26	34	8	N/A
03/27/2017	17				8			10	Compliance date

Table B-1. We	eekly grab TP	data (in	parts pe	er billion)	for Shark River Slough.

Notes:

--- indicates water sample was not collected. "Compliance date" indicates biweekly sampling date for Consent Decree calculation. "N/A" indicates sampling data presented for informational purposes only.

APPENDIX C

WEEKLY GRAB TOTAL PHOSPHORUS CONCENTRATION DATA FOR TAYLOR SLOUGH AND COASTAL BASINS

TP concentration data used in this report can be directly retrieved from the South Florida Water Management District's DBHYDRO database by copying and pasting the following link into the address field of a web browser:

http://my.sfwmd.gov/dbhydroplsql/water_quality_data.report_full?v_where_clause=where+ station_id+in+('S332DX','S18C')+and+test_number+=+25+and+collect_method+=+'G'+and+dat e_collected+>=+'01-MAR-2017'+and+date_collected+<+'01-APR-2017'+and+sample_type_new+=+'SAMP'&v_target_code=file_csv

The link only generates data that have not been qualified. Qualified water quality data must be retrieved interactively via the DBHYDRO browser.

The "Preferred DBKEY" daily mean flow data for stations at Taylor Slough (S332D) and the Coastal Basins (S18C) during the reporting quarter can be retrieved by copying and pasting the following link into the address field of a web browser:

http://my.sfwmd.gov/dbhydroplsql/web_io.report_process?v_period=uspec&v_start_date=2 0170101&v_end_date=20170331&v_report_type=format7&v_target_code=file_csv&v_run_mod e=onLine&v_js_flag=Y&v_dbkey=15760/TA413

Date	S332DX	S18C
04/04/2016	6	
04/05/2016		4
04/11/2016	5	
04/12/2016		5
04/18/2016	6	
04/19/2016		5
04/25/2016	6	
04/26/2016		5
05/02/2016	7	
		3
05/03/2016	6	5
05/09/2016		 4
05/10/2016		
05/16/2016	6	
05/17/2016		3
05/23/2016	7	
05/24/2016		4
05/31/2016	6	
06/01/2016		4
06/06/2016	6	
06/07/2016		4
06/13/2016	5	
06/14/2016		4
06/20/2016	5	
06/21/2016		4
06/27/2016	7	
06/28/2016		4
07/05/2016	7	
07/06/2016		4
07/11/2016	6	
07/12/2016		4
07/18/2016	6	
07/19/2016		4
07/25/2016	8	т
		6
07/26/2016	7	0
08/01/2016		4
08/02/2016		
08/08/2016	6	
08/09/2016		5
08/15/2016	6	
08/16/2016		5
08/22/2016	6	
08/23/2016		4
08/29/2016	6	
08/30/2016		3
09/06/2016	5	
09/07/2016		4
09/12/2016	6	
09/13/2016		4
09/19/2016	5	
09/20/2016		4
09/26/2016	6	
09/27/2016		5
03/2//2010		5

Table C-1. Weekly grab TP data (in parts per billion) for Taylor Slough and Coastal Basins.

Date	S332DX	S18C
10/03/2016	5	
10/04/2016		4
10/10/2016	5	
	5	3
10/11/2016		
10/17/2016	5	
10/18/2016		3
10/24/2016	5	
10/25/2016		3
10/31/2016	5	
11/01/2016		4
11/07/2016	7	
11/08/2016		3
11/14/2016	5	
11/15/2016		5
11/21/2016	5	
11/22/2016		2
11/28/2016	5	
11/29/2016		4
12/05/2016	6	
12/06/2016		4
12/12/2016	6	
12/13/2016		4
12/19/2016	5	
12/20/2016		4
12/27/2016	5	
12/28/2016		4
01/03/2017	5	
01/04/2017		4
01/09/2017	4	
01/10/2017		4
01/17/2017	6	
01/18/2017		4
01/23/2017	8	
		4
01/24/2017		
01/30/2017	6	4
01/31/2017		
02/06/2017	6	
02/07/2017		6
02/13/2017	6	
02/14/2017		4
02/20/2017	6	
02/21/2017	T	4
02/27/2017	4	
02/28/2017	1	4
03/06/2017	7	
03/07/2017		5
03/13/2017	8	
03/14/2017		5
03/20/2017	6	
03/21/2017		6
03/27/2017	6	
03/28/2017		9

Notes:

-- indicates water sample was not collected.

APPENDIX D

CALCULATION METHODS

Long Term Marsh Concentration Levels for Loxahatchee National Wildlife Refuge

Long Term Marsh Concentration Levels:

 $C = 10.7172 - 0.541156S + 1.372\sqrt{7.5819} - 0.9310S + 0.02902216S^{2}$

Terms:

C = the natural log of the geometric mean total phosphorus concentration across 14 marsh stations.

S = average stage measured at gauges CA1-9, CA1-7, and CA1-8C on sampling date (feet).

This equation is applicable over a stage range of 15.42 to 17.14 feet. If the stage on any sampling date exceeds 17.14 feet, a stage of 17.14 feet should be used in calculating the long term concentration levels. The equation shall not apply to dates when the average stage is less than 15.42 feet.

(1991 Settlement Agreement entered as a Consent Decree in 1992 and modified in 1995, Exhibit B, Appendix B, Attachment II, page B-7)

Discharge Limits and OFW Standards for Shark River Slough

Interim Discharge Limit:

 $C = 11.16 - 0.00465Q + 1.397\sqrt{6.377 - 0.00591Q + 0.00000436Q^2}$

Long-Term Discharge Limit & OFW Standard:

$$C = 11.38 - 0.00538Q + 1.397\sqrt{2.493 - 0.00231Q + 0.00000170Q^2}$$

Frequency Exceedance:

 $F = 48.411 - 0.02896Q + 1.397\sqrt{330.1 - 0.3071Q + 0.0002254Q^2}$

Terms:

Water Year = October through September

Q = total inflow to Shark River Slough for water year, S-12s + S-333 + any additional inflow from the WCAs established in the future, thousand acre-ft/yr (Kac-ft/yr).

C = limit on maximum flow-weighted-mean inflow concentration for any Water Year, composite of all inflows to Shark Slough (ppb).

F = exceedance for maximum frequency (percent) of inflow concentrations exceeding 10 ppb, computed from the time series of concentrations composited across all inflow structures on each sampling date with positive flow in a given Water Year.

The range of flow (Q) used in deriving the limits is 117 to 1061 Kac-ft/yr. If the total flow for any water year exceeds 1061 Kac-ft/yr, a flow of 1061 Kac-ft/yr should be used in calculating the discharge limits.

(1991 Settlement Agreement entered as a Consent Decree in 1992 and modified in 1995, Exhibit B, Appendix A, Attachment I, page A-5)

Discharge Limits and OFW Standards for Taylor Slough and Coastal Basins

Long-Term Flow-Weighted Discharge Limit & OFW Standard = 11.0 ppb

Frequency Exceedance:

Frequency of values > 10 ppb must be less than 53.1%.

Terms:

Limits are defined on a Water Year basis, October through September.

Basin flow is the total flow through structures S-332, S-175, S-18C, plus any new release points from this basin established in the future, thousand acre-ft/yr (Kac-ft/yr).

Limits apply to the flow-weighted-mean concentration for any Water Year, composite of all inflows to Taylor Slough (S-332) and Coastal Basin (S-18C).

Frequency exceedance is the exceedance for maximum frequency (percent) of inflow concentrations exceeding 10 ppb, computed from the time series of concentrations composited across all inflow structures on each sampling date with positive flow in a given Water Year.

(1991 Settlement Agreement entered as a Consent Decree in 1992 and modified in 1995, Exhibit B, Appendix A, Attachment II, page A-6)

APPENDIX E

DOCUMENT REVISIONS

Page/Date	Original	Revision