

# Settlement Agreement Report

Second Quarter  
April - June 2016

Prepared for the  
Technical Oversight Committee

October 14, 2016



Shark River Slough compliance results are published annually in this report when the final approved flow data for a federal water year (WY) are available. The WY2016 (October 1, 2015 – September 30, 2016) results will be published at that time.

Prepared by:

Cheol Mo, Violeta Ciuca, and Jonathan P. Madden

Compliance Assessment and Reporting Section  
Water Quality Bureau  
South Florida Water Management District  
3301 Gun Club Road  
West Palm Beach, FL 33406

## **PURPOSE**

The South Florida Water Management District has prepared this report to provide a quarterly update to the Everglades Technical Oversight Committee on the compliance status with total phosphorus levels or limits defined in the 1991 Settlement Agreement, entered as a Consent Decree in 1992, and modified in 1995. The areas of interest in this report include the interior marsh stations in the Arthur R. Marshall Loxahatchee National Wildlife Refuge and two discharges to Everglades National Park: inflows to Shark River Slough and inflows to Taylor Slough and Coastal Basins.

## CONTENTS

Executive Summary .....	1
Arthur R. Marshall Loxahatchee National Wildlife Refuge.....	3
Background.....	3
Reporting Period Update.....	3
Everglades National Park .....	7
Shark River Slough.....	7
Background .....	7
Reporting Period Update .....	7
Taylor Slough and Coastal Basins .....	9
Background .....	9
Reporting Period Update .....	9

## APPENDICES

Appendix A	Monthly Total Phosphorus Concentration Data for the Arthur R. Marshall Loxahatchee National Wildlife Refuge .....	A-1
Appendix B	Weekly Grab Total Phosphorus Concentration Data for Shark River Slough ....	B-1
Appendix C	Weekly Grab Total Phosphorus Concentration Data for Taylor Slough and Coastal Basins .....	C-1
Appendix D	Calculation Methods .....	D-1
Appendix E	Document Revisions.....	E-1

## TABLES

Table 1.	TP compliance, second quarter 2016 .....	1
Table 2.	Refuge TP compliance tracking .....	6
Table 3.	Taylor Slough and Coastal Basins TP compliance tracking.....	13

## FIGURES

Figure 1.	Areas of interest .....	2
Figure 2.	Refuge water quality sampling and stage measurement stations. ....	4
Figure 3.	(A) Monthly TP geometric mean concentrations for the Refuge compared to calculated long-term levels. (B) Deviation of monthly geometric mean TP concentrations from calculated long-term levels.....	5
Figure 4.	ENP flow structures.....	8

Figure 5. The 12-month flow-weighted mean TP concentrations in inflows to ENP through Taylor Slough and Coastal Basins at the end of each water year compared to the 11 ppb long-term TP limit ..... 11

Figure 6. The 12-month flow-weighted mean TP concentrations in inflows to ENP through Taylor Slough and Coastal Basins at the end of each month and the flow-weighted mean TP concentration for each sampling event..... 11

Figure 7. Daily flows in cubic feet per second (cfs) into ENP as a stacked sum of Taylor Slough (structure S332D) and Coastal Basins (structure S18C)..... 12

Figure 8. Daily flows at individual Coastal Basins (S18C) and Taylor Slough (S332D) structures into ENP..... 12

Figure 9. Flow from Taylor Slough and Coastal Basins structures (S332D and S18C) on the day of sampling, and the corresponding flow-weighted mean TP concentrations for individual sampling events. .... 14

### ACRONYMS AND ABBREVIATIONS

cfs	cubic feet per second
ENP	Everglades National Park
feet NGVD 29	feet relative to the National Geodetic Vertical Datum of 1929
kac-ft	thousand acre-feet
ppb	parts per billion
Refuge	Arthur R. Marshall Loxahatchee National Wildlife Refuge
TOC	Everglades Technical Oversight Committee
TP	total phosphorus
µg/L	micrograms per liter
WCA	Water Conservation Area

## EXECUTIVE SUMMARY

This report fulfills the South Florida Water Management District's reporting requirements under the 1991 Settlement Agreement, entered as a Consent Decree in 1992 and modified in 1995, for the second quarter of 2016 (April - June 2016). Total phosphorus (TP) compliance highlights for this period are summarized below for the Arthur R. Marshall Loxahatchee National Wildlife Refuge (Refuge) and inflows to Everglades National Park (ENP) (**Table 1** and **Figure 1**):

- **Refuge:** The geometric mean TP concentrations were below the long-term levels for April, May, and June 2016.
- **Shark River Slough:** The 12-month flow-weighted mean TP concentration (annual compliance result) will be published at a later date when the final approved flow data are available for the current federal water year (WY) 2016 (October 1, 2015 - September 30, 2016).
- **Taylor Slough and Coastal Basins:** The 12-month flow-weighted mean TP concentrations were below the 12-month long-term limit during the second quarter of 2016.

**Table 1.** TP compliance, second quarter 2016.

Month	Geometric Mean TP Concentration (ppb)	Long-term Level (ppb)	Mean Stage (feet NGVD 29)	Number of Samples	
<b>Arthur R. Marshall Loxahatchee National Wildlife Refuge</b>					
Apr 2016	6.9	10.3	16.36	14	
May 2016	8.8	12.7	15.96	9	
Jun 2016	7.2	12.7	15.97	9	
12-Month Period Ending	Total Flow (kac-ft)	12-Month Flow-weighted Mean TP Concentration (ppb)	Long-term Limit (ppb)	Percent of Sampling Events Greater than 10 ppb	
				Guideline	Observed
<b>Everglades National Park – Shark River Slough</b>					
Apr 2016	The quarterly flow and TP data for this table are posted separately on the TOC website. The annual compliance result for the 12-month flow-weighted mean TP concentration for the federal water year ending on September 30 will be published in this report when the final approved flow data are available.				
May 2016					
Jun 2016					
<b>Everglades National Park – Taylor Slough and Coastal Basins</b>					
Apr 2016	207.9	5.1	11.0	53.1	0.0
May 2016	247.2	5.2	11.0	53.1	0.0
Jun 2016	278.4	5.2	11.0	53.1	0.0

**Notes:**

- ppb = parts per billion. Values are actually in µg/L (micrograms per liter), which, for the purposes of this report, is equivalent to ppb.
- feet NGVD 29 = elevation in feet relative to the National Geodetic Vertical Datum of 1929.
- kac-ft = thousand acre-feet.
- Compliance for inflows to Everglades National Park (Shark River Slough, and Taylor Slough and Coastal Basins) is evaluated annually based on the 12-month flow-weighted mean TP concentration for the federal water year ending on September 30.

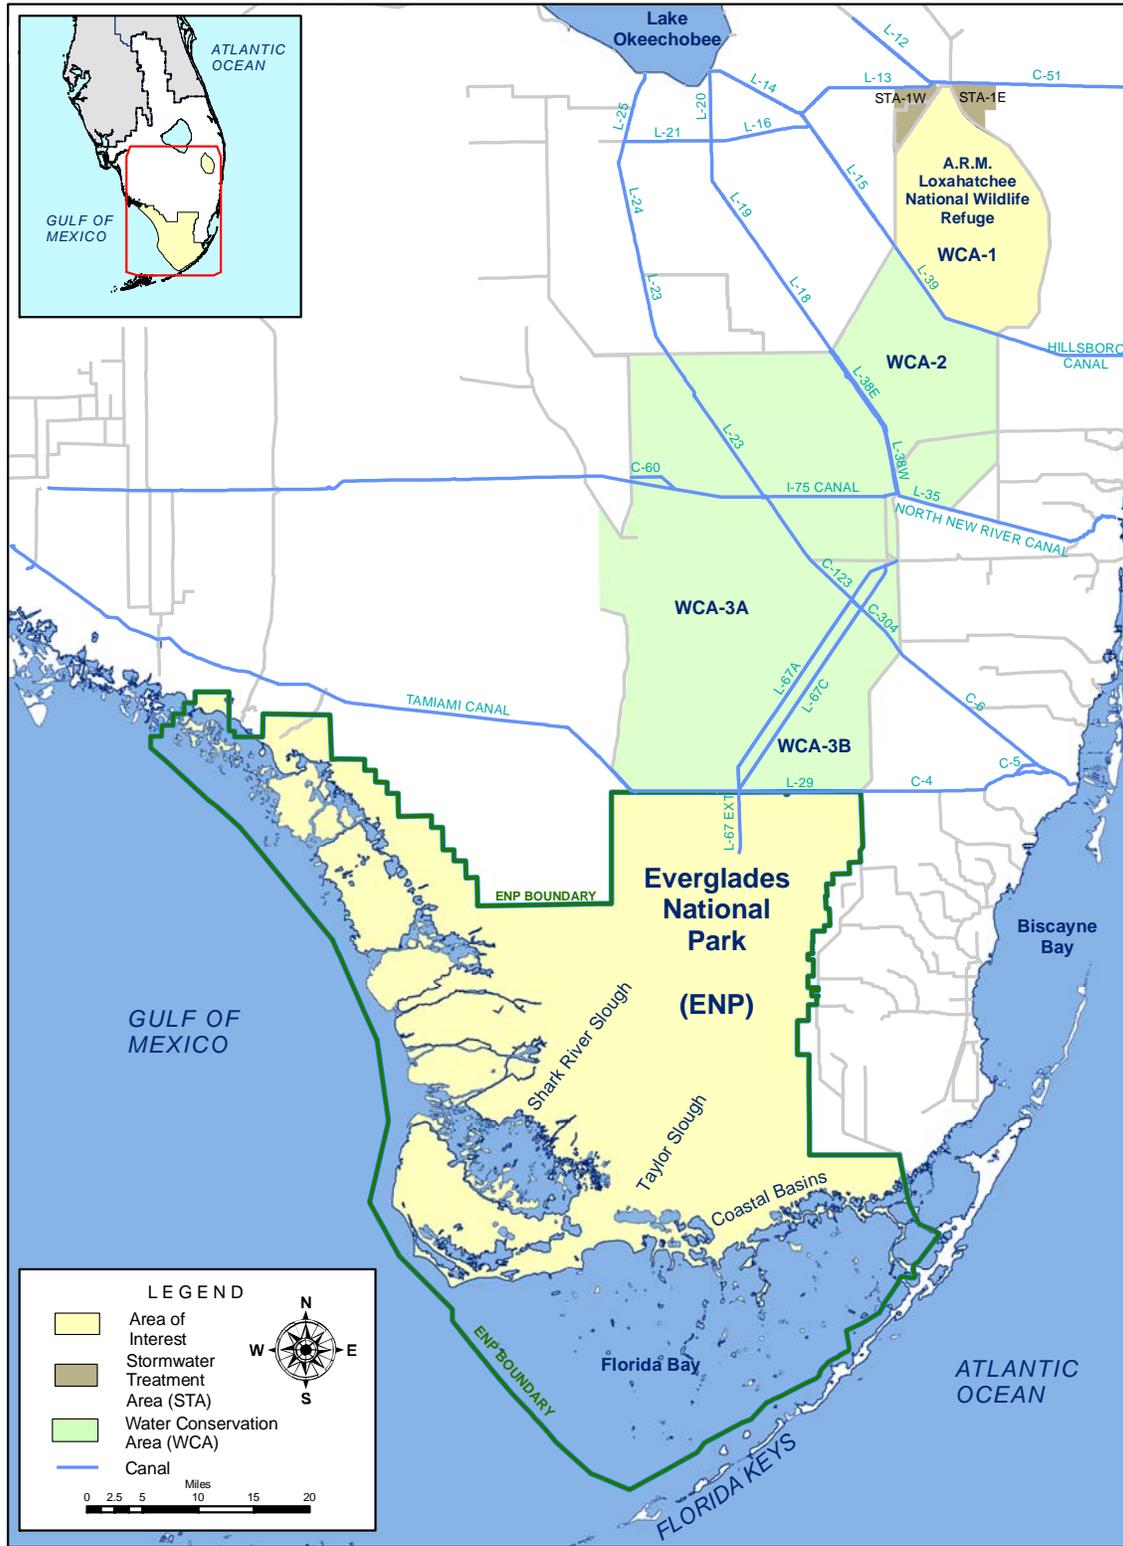


Figure 1. Areas of interest.

## ARTHUR R. MARSHALL LOXAHATCHEE NATIONAL WILDLIFE REFUGE

### Background

The 1991 Settlement Agreement ended the Everglades lawsuit and was entered into by the federal government, the State of Florida, and the South Florida Water Management District. The subsequent Consent Decree, as modified in 1995, specified that interim and long-term TP concentration levels for the Refuge must be met by February 1, 1999, and December 31, 2006, respectively. Both the interim and long-term concentration levels vary monthly because they are calculated as a function of water stage measured at gauging stations 1-7, 1-8C, and 1-9 within the Refuge. The stage range within which the interim and long-term concentration levels are applicable is 15.42 to 17.14 feet relative to the National Geodetic Vertical Datum of 1929 (NGVD 29). The monthly TP concentrations are determined from water samples collected at 14 interior marsh stations, LOX3 through LOX16 (**Figure 2**). As required in the Consent Decree, the concentrations are converted to a geometric mean, which is compared to the long-term concentration level. Monthly TP data for each station for the past 36 months are provided in **Appendix A**. The calculation methods specified in the Consent Decree are provided in **Appendix D**.

### Reporting Period Update

All 14 stations were sampled in April 2016. TP samples were not collected at LOX3, LOX4, LOX5, LOX9, and LOX10 stations in May 2016 and at LOX3, LOX5, LOX8, LOX9, and LOX10 stations in June 2016 because the water depth was less than 0.1 meters at those stations.

Sampling day average stages in the Refuge were 16.36, 15.96, and 15.97 feet NGVD 29 in April, May, and June 2016, respectively (**Figure 3** and **Table 2**). The geometric means, calculated from TP concentrations measured in water samples collected in April, May, and June 2016, were 6.9, 8.8, and 7.2 parts per billion (ppb), respectively. The geometric mean TP concentrations were below the long-term level for April, May, and June 2016.


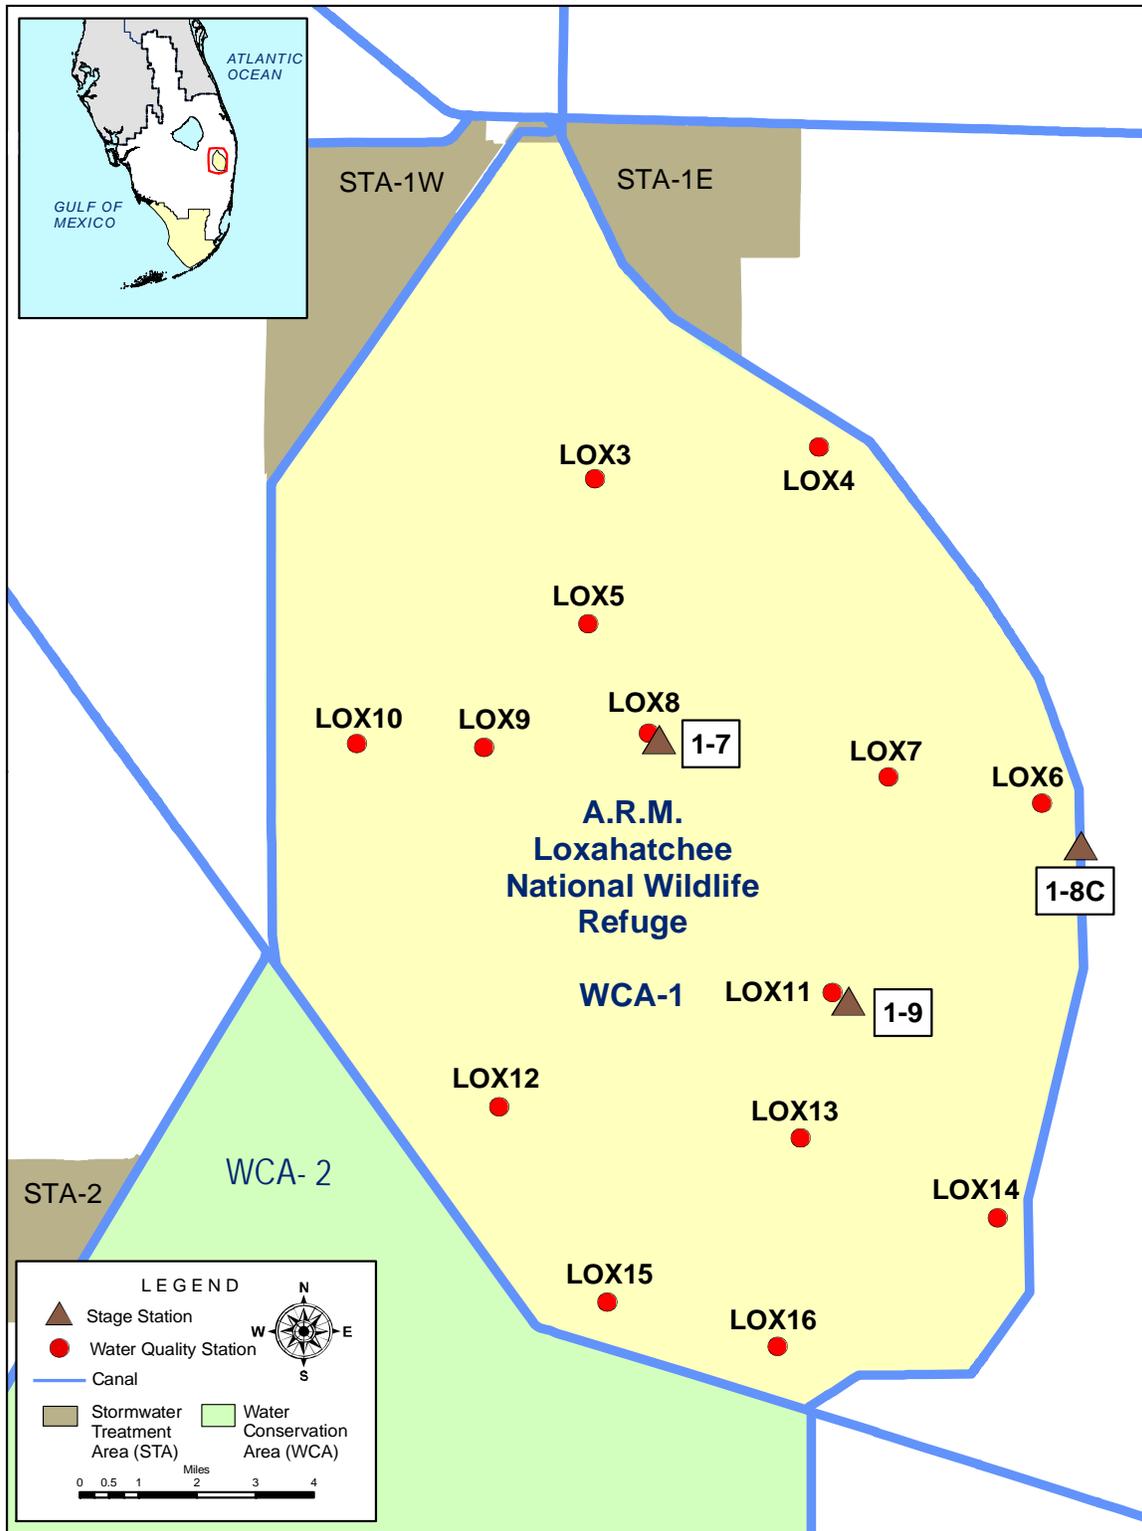


Figure 2. Refuge water quality sampling and stage measurement stations.

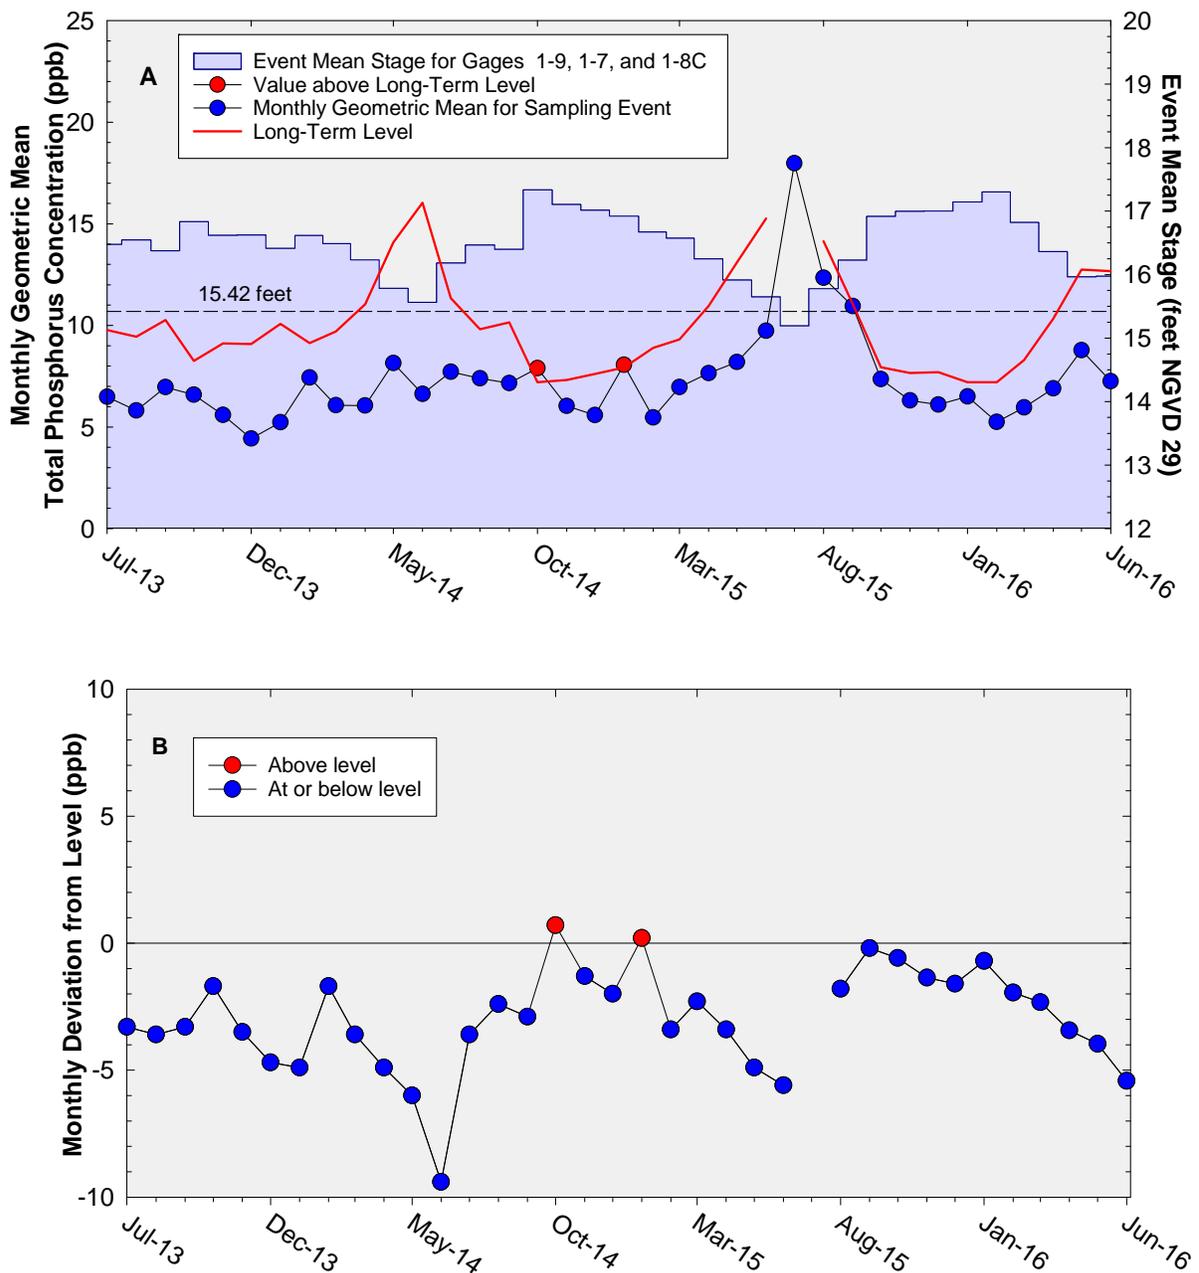

**Figure 3. (A)** Monthly TP geometric mean concentrations for the Refuge compared to calculated long-term levels, which are adjusted for fluctuations in stage. The geometric mean TP concentrations were above the long-term level in October 2014 and January 2015. The long-term level was not applicable for July 2015 because the sampling event average stage was less than 15.42 feet. **(B)** Deviation of monthly geometric mean TP concentrations from calculated long-term levels. Negative values indicate that the geometric mean was lower than the long-term level. The Everglades Technical Oversight Committee reached a consensus at the October 27, 2015, quarterly meeting on a recommendation that no additional remedies are needed at this time to address the two Refuge excursions that occurred in October 2014 and January 2015.

**Table 2.** Refuge TP compliance tracking.

Month	Geometric Mean TP Concentration (ppb)	Long-Term Level (ppb) Effective 12/31/2006	Average Stage <sup>a</sup> (feet NGVD 29)	Number of Samples
Jul-2013	6.5	9.8	16.48	14
Aug-2013	5.8	9.4	16.55	14
Sep-2013	7.0	10.3	16.38	14
Oct-2013	6.6	8.3 <sup>b</sup>	16.83 <sup>b</sup>	14
Nov-2013	5.6	9.1	16.61	14
Dec-2013	4.4	9.1	16.62	13
Jan-2014	5.2	10.1	16.41	12
Feb-2014	7.4	9.1	16.61	14
Mar-2014	6.1	9.7	16.49	14
Apr-2014	6.1	11.0	16.23	12
May-2014	8.1	14.1	15.79	9
Jun-2014	6.6	16.0	15.56	6
Jul-2014	7.7	11.3	16.18	12
Aug-2014	7.4	9.8	16.47	14
Sep-2014	7.2	10.1	16.40	14
<b><i>Oct-2014</i></b>	<b><i>7.9</i></b>	<b><i>7.2</i></b>	<b><i>17.34</i></b>	<b><i>14</i></b>
Nov-2014	6.0	7.3	17.10	14
Dec-2014	5.6	7.6	17.01	14
<b><i>Jan-2015</i></b>	<b><i>8.1</i></b>	<b><i>7.9</i></b>	<b><i>16.92</i></b>	<b><i>14</i></b>
Feb-2015	5.5	8.9	16.67	14
Mar-2015	7.0	9.3	16.57	14
Apr-2015	7.6	11.0	16.25	12
May-2015	8.2	13.1	15.91	10
Jun-2015	9.7	15.3	15.65	5
Jul-2015	18.0	NA	15.19	2
Aug-2015	12.3	14.1	15.78	8
Sep-2015	10.9	11.1	16.23	14
Oct-2015	7.4	7.9	16.92	14
Nov-2015	6.3	7.7	17.00	14
Dec-2015 <sup>c</sup>	6.1 (5.9)	7.7 (7.6)	17.00 (17.02)	12 (14)
Jan-2016	6.5	7.2	17.15	14
Feb-2016	5.3	7.2	17.30	14
Mar-2016	6.0	8.3	16.82	14
Apr-2016	6.9	10.3	16.36	14
May-2016	8.8	12.7	15.96	9
Jun-2016	7.2	12.7	15.97	9

## Notes:

- ppb = parts per billion. Values are actually in µg/L (micrograms per liter), which, for the purposes of this report, is equivalent to ppb.
- feet NGVD 29 = elevation in feet relative to the National Geodetic Vertical Datum of 1929.
- Highlighted rows with bold, italicized text indicate when an excursion over the long-term level occurred.
- a. Average stage is calculated using stage elevations at stations 1-7, 1-8C, and 1-9 for a given sampling date.
- b. 1-9 gage stage datum for October 22, 2013, sampling event was missing and the October 23, 2013, stage datum at 1-9 was used for the daily stage for both October 22 and 23, 2013, to calculate the sampling event mean stage in previous reports. The datum became available on October 20, 2014, and was subsequently evaluated. The inclusion of this datum did not result in any change to the previously reported average stage calculation.
- c. December 2015 values for Refuge including resampled data (at LOX14 and LOX15) are presented in parentheses.

## EVERGLADES NATIONAL PARK

### Shark River Slough

#### Background

The Settlement Agreement/Consent Decree (1995) specified that interim and long-term TP concentration limits for discharges into ENP (**Figure 4**) through Shark River Slough be met by October 1, 2003, and December 31, 2006, respectively. It was specified that the TP concentrations be presented as 12-month flow-weighted means. Only the TP concentrations for the water year ending September 30 are evaluated for compliance with the Consent Decree limits (**Appendix D**). The long-term TP concentration limit for inflows to Shark River Slough is represented by concentrations delivered through S12A, S12B, S12C, and S12D during the Outstanding Florida Waters baseline period of March 1, 1978, to March 1, 1979, and is adjusted for variations in flow. Inflow concentrations of TP through S12A, S12B, S12C, S12D, and S333 are compared to the interim and long-term limits at the end of each water year (October 1 through September 30). The long-term limit went into effect in WY 2007.

The 12-month flow-weighted mean TP concentration (7.7 ppb) was lower than the long-term limit (11.9 ppb) for the 12-month period ending on September 30, 2015. Therefore, inflows to Shark River Slough met the TP limit for WY 2015 (October 1, 2014 - September 30, 2015).

#### Reporting Period Update

Pursuant to agreement among all Everglades Technical Oversight Committee (TOC) members at the May 14, 2013, TOC meeting, the following three changes were made to the quarterly Settlement Agreement Report: 1) publishing of the quarterly 12-month flow-weighted mean TP concentrations for Shark River Slough is discontinued, 2) provisional quarterly 12-month flow-weighted mean TP concentrations are posted separately to the TOC website, <http://www.sfwmd.gov/toc>, and 3) the annual 12-month flow-weighted mean TP concentration for the current water year ending on September 30 will be published once the final approved flow data for the S12A, S12B, S12C, and S12D structures becomes available. These changes have been implemented beginning with the January - March 2013 first quarter report.

The current water year began on October 1, 2015, and will end on September 30, 2016. It is anticipated that the final approved flow data for the water year will be available in April 2017, and the annual 12-month flow-weighted mean TP concentration to determine compliance with the long-term limit will be published as a revision to the July - September 2016 third quarter report.

In addition to the provisional quarterly 12-month flow-weighted mean TP concentrations that are posted separately to the TOC website, the water quality data for Shark River Slough are available in **Appendix B** of this report.

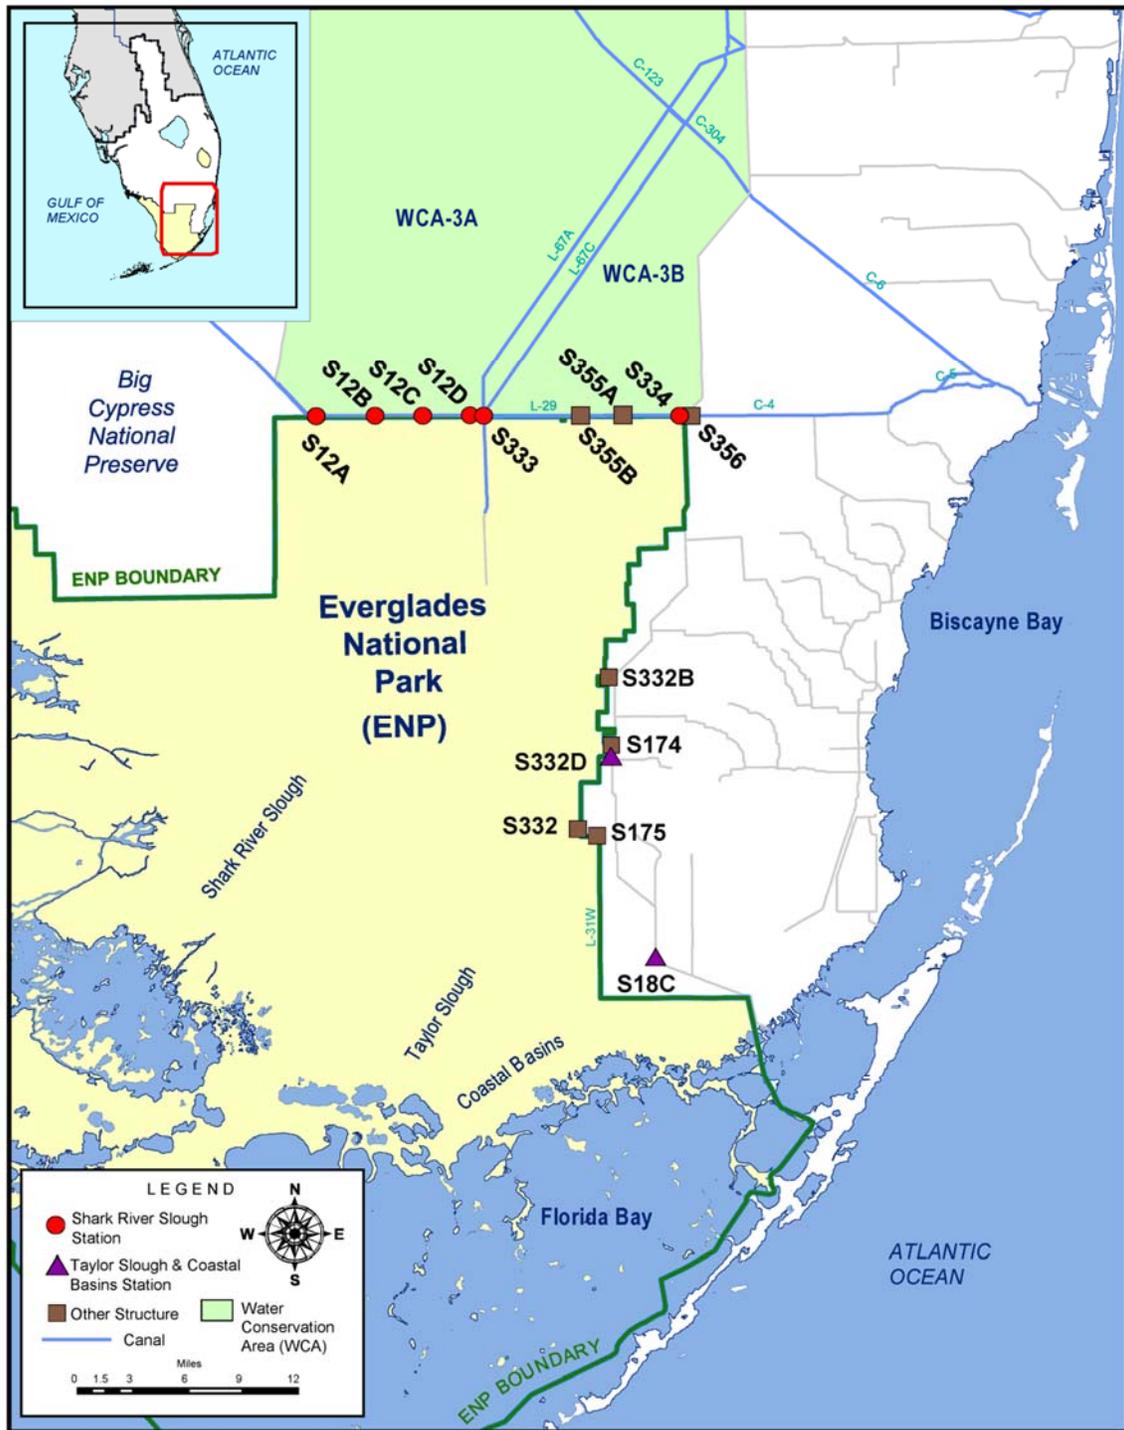


Figure 4. ENP flow structures.

## Taylor Slough and Coastal Basins

### Background

Under the Consent Decree, a single TP long-term limit of 11 ppb, to be met by December 31, 2006, was set for the two points of inflow to Taylor Slough (S332 and S175) and the inflow point to Coastal Basins (S18C) (see **Appendix C**). The 12-month flow-weighted mean concentrations have consistently been lower than the long-term limit of 11 ppb.

Inflow TP concentrations to ENP through Taylor Slough and Coastal Basins are compared to the 11 ppb limit at the end of each water year using data from both the old (S175, S332, and S18C) and new (S174, S332D, and S18C) combinations of structures (**Figure 5**). The narrow bars in **Figure 5** represent the 12-month flow-weighted mean TP concentrations from S332, S175, and S18C for WY 1991 through WY 2002. The wider bars for WY 1999 through WY 2015 represent the new combination of structures.

TP and flow data from both sets of structures presented in prior editions of this report through December 2001 (April 2002 report) showed that, beginning in October 2000, the 12-month moving total flow for S332D, S174, and S18C was consistently greater than flow at S332, S175, and S18C. There was also a shift in flow-weighted mean TP concentration data whereby S332D, S174, and S18C concentrations became equal to, and then consistently lower than, the concentrations at S332, S175, and S18C. These changes reflected the switch from S332 to S332D for water delivery to Taylor Slough between July 3 and July 5, 2000. Furthermore, the S174 site was plugged in September 2007, preventing any additional flow. Consequently, for WY 2002 through WY 2007, compliance tracking was represented by S332D, S174, and S18C. Since WY 2008, S332D and S18C have represented the compliance tracking structures.

The 12-month flow-weighted mean TP concentration (4.5 ppb) was lower than the long-term limit (11.0 ppb) for the 12-month period ending on September 30, 2015. Therefore, inflows to Taylor Slough and Coastal Basins met the TP limit for WY 2015 (October 1, 2014 - September 30, 2015).

### Reporting Period Update

**Figure 6** presents the 12-month and individual sampling event flow-weighted mean TP concentrations at the S332D and S18C structures. All TP grab sample concentrations taken on positive flow days reported for surface water monitoring at the sites were used for the compliance calculations.

The daily flows into ENP through S332D and S18C are presented in **Figures 7 and 8**.


For the combined flow through S332D and S18C, the 12-month flow-weighted mean TP concentrations for the periods ending April, May, and June 2016, were 5.1, 5.2, and 5.2 ppb, respectively (**Table 3**).

The Consent Decree stipulates that the percent of flow-weighted mean TP concentrations greater than 10 ppb from each sampling event in any 12-month period must not exceed a fixed guideline


of 53.1 percent. For the 12-month periods ending April, May, and June 2016, there was no sampling event TP concentration greater than 10 ppb.

**Figure 9** shows the relationship between the daily inflows and the corresponding flow-weighted mean TP concentrations for each sampling event. The sampling event flow-weighted mean concentrations generally remained very low. The average of the sampling event flow-weighted mean TP concentrations was 5.0 ppb in the second quarter.


The United States Army Corps of Engineers authorized the C-111 Spreader Canal project in 1995 to restore more natural hydrologic conditions in Taylor Slough and to maintain flood protection to the east of the L-31N and C-111 canals. The original project facilities consisted of pump stations (S332B, S332C, and S332D), detention cells (Cell 1 through Cell 5), a connector cell between Cell 2 and Cell 3, a flow-way cell originating at Berm 3 of Cell 5, and four diversion structures (DS1 through DS4). Upon completion of a United States Army Corps of Engineers construction project in 2009, an interconnected detention system now exists, starting at the S332B west discharge and continuing to the S332D high head cell.

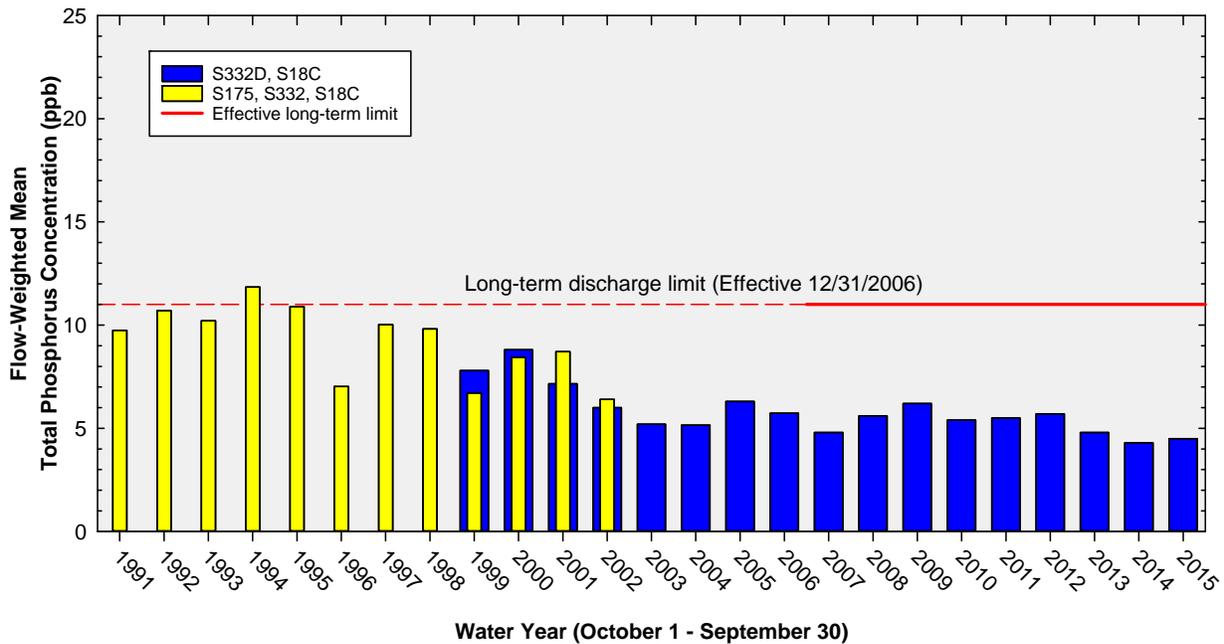


**Figure 5.** The 12-month flow-weighted mean TP concentrations in inflows to ENP through Taylor Slough and Coastal Basins at the end of each water year compared to the 11 ppb long-term TP limit. Blue bars show S332D, S174, and S18C for WY 1999 through WY 2007, and S332D and S18C from WY 2008 to WY2015.

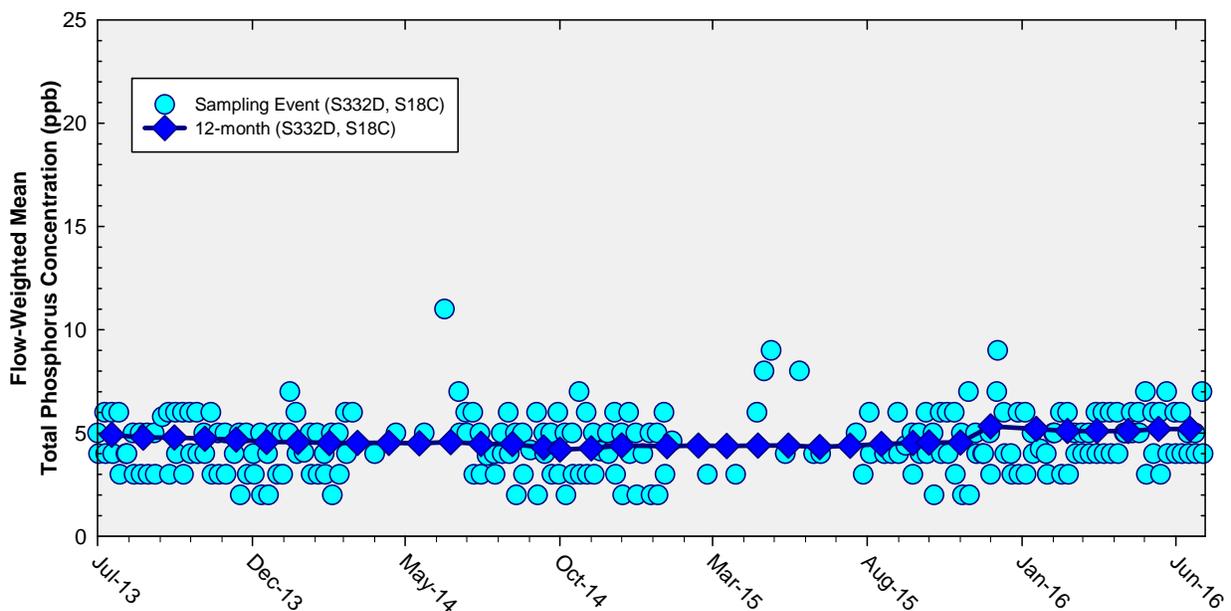

**Figure 6.** The 12-month flow-weighted mean TP concentrations in inflows to ENP through Taylor Slough and Coastal Basins at the end of each month and the flow-weighted mean TP concentration for each sampling event.

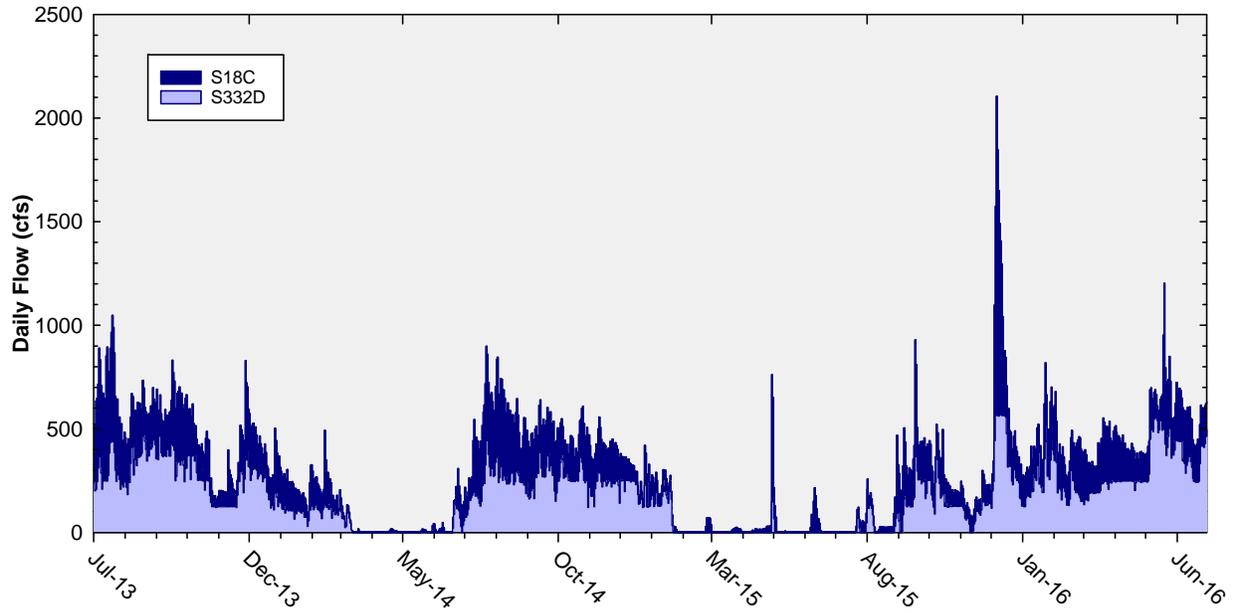

**Figure 7.** Daily flows measured in cubic feet per second (cfs) into ENP as a stacked sum of Taylor Slough (structure S332D) and Coastal Basins (structure S18C).

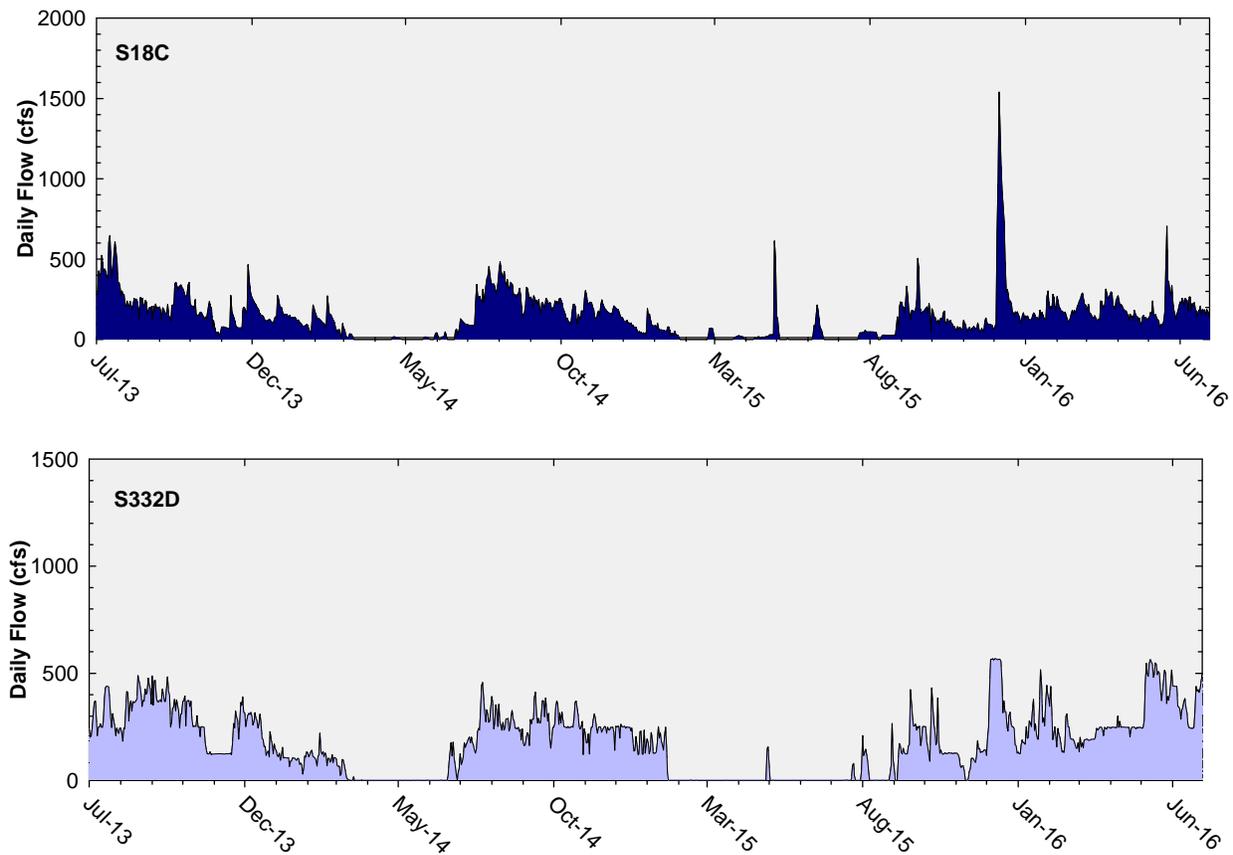


**Figure 8.** Daily flows at individual Coastal Basins (S18C) and Taylor Slough (S332D) structures into ENP.

**Table 3.** Taylor Slough and Coastal Basins TP compliance tracking.

12-Month Period	Total Flow (kac-ft)	Flow-Weighted Mean TP Concentration (ppb)	Long-Term Limit (ppb) <i>Effective 12/31/2006</i>	Percent of Sampling Events Greater than 10 ppb	
				Guideline	Observed
Aug 2012 - Jul 2013	264.0	4.9	11.0	53.1	1.4
Sep 2012 - Aug 2013	255.8	4.8	11.0	53.1	1.4
<b><i>Oct 2012 - Sep 2013</i></b>	<b><i>248.0</i></b>	<b><i>4.8</i></b>	<b><i>11.0</i></b>	<b><i>53.1</i></b>	<b><i>1.3</i></b>
Nov 2012 - Oct 2013	228.9	4.7	11.0	53.1	1.3
Dec 2012 - Nov 2013	221.7	4.7	11.0	53.1	1.3
Jan 2013 - Dec 2013	227.5	4.6	11.0	53.1	1.3
Feb 2013 - Jan 2014	233.2	4.6	11.0	53.1	1.3
Mar 2013 - Feb 2014	245.1	4.5	11.0	53.1	0.0
Apr 2013 - Mar 2014	246.7	4.5	11.0	53.1	0.0
May 2013 - Apr 2014	246.6	4.5	11.0	53.1	0.0
Jun 2013 - May 2014	239.9	4.5	11.0	53.1	0.0
July 2013 - Jun 2014	215.9	4.6	11.0	53.1	1.3
Aug 2013 - Jul 2014	203.2	4.5	11.0	53.1	1.3
Sep 2013 - Aug 2014	203.8	4.5	11.0	53.1	1.3
<b><i>Oct 2013 - Sep 2014</i></b>	<b><i>196.5</i></b>	<b><i>4.3</i></b>	<b><i>11.0</i></b>	<b><i>53.1</i></b>	<b><i>1.3</i></b>
Nov 2013 - Oct 2014	200.6	4.2	11.0	53.1	1.3
Dec 2013 - Nov 2014	204.9	4.3	11.0	53.1	1.3
Jan 2014 - Dec 2014	198.6	4.4	11.0	53.1	1.4
Feb 2014 - Jan 2015	194.8	4.4	11.0	53.1	1.5
Mar 2014 - Feb 2015	183.0	4.4	11.0	53.1	1.6
Apr 2014 - Mar 2015	181.4	4.4	11.0	53.1	1.6
May 2014 - Apr 2015	184.6	4.4	11.0	53.1	1.6
Jun 2014 - May 2015	185.2	4.4	11.0	53.1	1.5
Jul 2014 - Jun 2015	182.9	4.3	11.0	53.1	0.0
Aug 2014 - Jul 2015	154.4	4.4	11.0	53.1	0.0
Sep 2014 - Aug 2015	124.1	4.5	11.0	53.1	0.0
<b><i>Oct 2014 - Sep 2015</i></b>	<b><i>117.8</i></b>	<b><i>4.5</i></b>	<b><i>11.0</i></b>	<b><i>53.1</i></b>	<b><i>0.0</i></b>
Nov 2014 - Oct 2015	107.3	4.5	11.0	53.1	0.0
Dec 2014 - Nov 2015	93.1	4.5	11.0	53.1	0.0
Jan 2014 - Dec 2015	122.4	5.3	11.0	53.1	0.0
Feb 2015 - Jan 2016	139.4	5.2	11.0	53.1	0.0
Mar 2015 - Feb 2016	162.2	5.1	11.0	53.1	0.0
Apr 2015 - Mar 2016	187.2	5.1	11.0	53.1	0.0
May 2015 - Apr 2016	207.9	5.1	11.0	53.1	0.0
Jun 2015 - May 2016	247.2	5.2	11.0	53.1	0.0
Jul 2015 - Jun 2016	278.4	5.2	11.0	53.1	0.0

## Notes:

- kac-ft = thousand acre-feet.
- ppb = parts per billion. Values are actually in µg/L (micrograms per liter), which, for the purposes of this report, is equivalent to ppb.
- Compliance is evaluated annually based on the 12-month flow-weighted mean TP concentration for the federal water year ending on September 30. The compliance periods are shown as highlighted rows with bold, italicized text.

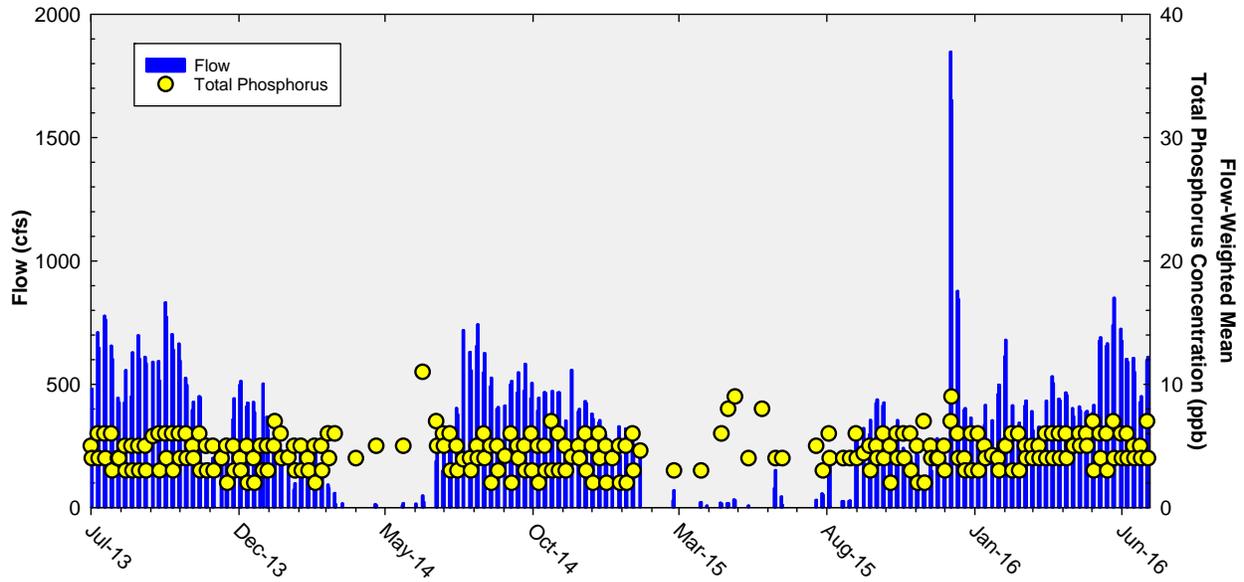

**Figure 9.** Flow from Taylor Slough and Coastal Basins structures (S332D and S18C) on the days of sampling, and the corresponding flow-weighted mean TP concentrations for individual sampling events.

## APPENDIX A

### MONTHLY TOTAL PHOSPHORUS CONCENTRATION DATA FOR THE ARTHUR R. MARSHALL LOXAHATCHEE NATIONAL WILDLIFE REFUGE

Total phosphorus concentration data used in this report can be directly retrieved from the South Florida Water Management District DBHYDRO database by copying and pasting the following link into the address field of a web browser:

[http://www.sfwmd.gov/dbhydroplsql/water\\_quality\\_data.report\\_full?v\\_where\\_clause=where+station\\_id+like+\('LOX%25'\)+and+station\\_id+not+like+\('LOXA%25'\)+and+test\\_number+=+25+and+date\\_collected+>+'01-APR-2016'+and+date\\_collected+<+'01-JUL-2016%'+and+sample\\_type\\_new+=+'SAMP'&v\\_target\\_code=file\\_csv](http://www.sfwmd.gov/dbhydroplsql/water_quality_data.report_full?v_where_clause=where+station_id+like+('LOX%25')+and+station_id+not+like+('LOXA%25')+and+test_number+=+25+and+date_collected+>+'01-APR-2016'+and+date_collected+<+'01-JUL-2016%'+and+sample_type_new+=+'SAMP'&v_target_code=file_csv)

The link above only generates data that have not been qualified. Qualified water quality data must be retrieved interactively via the DBHYDRO browser.

Stage data for stations 1-7, 1-8C, and 1-9 from the reporting quarter can be retrieved by copying and pasting the following link into the address field of a web browser:

[http://www.sfwmd.gov/dbhydroplsql/web\\_io.report\\_process?v\\_period=uspec&v\\_start\\_date=20160401&v\\_end\\_date=20160630&v\\_report\\_type=format7&v\\_target\\_code=file\\_csv&v\\_run\\_mode=onLine&v\\_js\\_flag=Y&v\\_dbkey=FE775/FE776/FE777](http://www.sfwmd.gov/dbhydroplsql/web_io.report_process?v_period=uspec&v_start_date=20160401&v_end_date=20160630&v_report_type=format7&v_target_code=file_csv&v_run_mode=onLine&v_js_flag=Y&v_dbkey=FE775/FE776/FE777)

**Table A-1.** Arthur Marshall Loxahatchee National Wildlife Refuge monthly TP data (parts per billion).

Month-Year	LOX3	LOX4	LOX5	LOX6	LOX7	LOX8	LOX9	LOX10	LOX11	LOX12	LOX13	LOX14	LOX15	LOX16
Jul-2013	7	6	7	7	7	7	5	5	5	5	6	8	7	11
Aug-2013	7	5	5	5	5	8	5	6	6	6	7	3	7	9
Sep-2013	6	7	6	6	6	8	6	9	6	8	7	6	8	10
Oct-2013	5	10	4	6	5	8	7	6	6	7	8	9	6	8
Nov-2013	7	7	4	4	4	7	6	7	5	6	7	5	5	6
Dec-2013	---	5	4	3	5	4	3	7	4	5	5	5	4	5
Jan-2014	---	6	---	5	6	7	7	4	4	5	5	4	5	6
Feb-2014	11	12	9	4	6	9	9	7	6	8	8	6	6	7
Mar-2014	7	7	6	5	6	8	5	5	6	7	7	6	5	6
Apr-2014	---	6	6	3	7	9	7	---	7	5	7	6	5	7
May-2014	---	---	---	8	9	10	---	---	9	8	8	7	6	9
Jun-2014	---	---	---	---	---	---	---	---	7	8	7	6	6	6
Jul-2014	---	11	11	7	8	13	7	---	7	7	7	6	5	7
Aug-2014	8	14	8	7	7	8	7	6	6	7	7	7	6	8
Sep-2014	6	11	6	6	6	9	7	7	8	8	8	6	6	8
Oct-2014	8	12	7	6	13	11	8	6	7	8	6	7	7	8
Nov-2014	6	7	7	5	7	8	8	6	5	4	5	6	6	6
Dec-2014	6	7	6	4	7	7	8	6	4	5	6	5	4	5
Jan-2015	9	9	10	6	9	9	9	7	9	8	7	7	7	8
Feb-2015	10	6	9	4	6	9	6	4	5	5	4	5	3	5
Mar-2015	11	9	10	6	7	7	9	4	6	7	6	6	5	8
Apr-2015	---	7	12	6	8	12	10	---	6	7	7	8	5	7
May-2015	---	10	---	11	7	12	---	---	7	7	9	7	6	8
Jun-2015	---	---	---	---	---	---	---	---	---	11	9	14	7	9
Jul-2015	++	++	++	---	++	---	++	++	---	19	---	17	---	---
Aug-2015	---	18	---	---	9	14	---	---	15	12	---	15	8	11
Sep-2015	13	23	9	16	9	10	10	15	9	12	10	9	7	9
Oct-2015	9	8	12	8	7	7	7	8	6	6	6	5	6	11
Nov-2015	6	6	6	5	7	6	7	7	7	6	7	5	6	8
Dec-2015	5	5	6	5	15	6	5	6	6	6	5	(4)	(6)	7
Jan-2016	8	8	8	6	7	7	6	7	6	7	6	5	5	6
Feb-2016	5	8	6	4	5	7	5	5	5	5	6	4	4	6
Mar-2016	5	6	6	8	7	8	6	7	5	5	4	6	5	7
Apr-2016	8	7	8	7	7	8	8	8	5	8	7	5	5	7
May-2016	---	---	---	9	14	10	---	---	10	8	8	8	6	8
Jun-2016	---	15	---	7	8	---	---	---	7	7	7	8	4	6

## Notes:

--- indicates sample was not collected due to insufficient water depth.

++ indicates the sampling trip was suspended due to low stage, following the guidance for suspending marsh sampling. (See page 3 for detail.)

( ) LOX14 and LOX15 water quality samples taken on December 2, 2015, were discarded due to processing errors and resampled on December 3, 2015.

## APPENDIX B

### WEEKLY GRAB TOTAL PHOSPHORUS CONCENTRATION DATA FOR SHARK RIVER SLOUGH

Total phosphorus concentration data used in this report can be directly retrieved from the South Florida Water Management District DBHYDRO database by copying and pasting the following link into the address field of a web browser:

[http://www.sfwmd.gov/dbhydroplsql/water\\_quality\\_data.report\\_full?v\\_where\\_clause=where+station\\_id+in+\('S12A','S12B','S12C','S12D','S333'\)+and+test\\_number+=+25+and+collect\\_method+=+'G'+and+date\\_collected+>='01-APR-2016'+and+date\\_collected+<+'01-JUL-2016'+and+sample\\_type\\_new+=+'SAMP'&v\\_target\\_code=file\\_csv](http://www.sfwmd.gov/dbhydroplsql/water_quality_data.report_full?v_where_clause=where+station_id+in+('S12A','S12B','S12C','S12D','S333')+and+test_number+=+25+and+collect_method+=+'G'+and+date_collected+>='01-APR-2016'+and+date_collected+<+'01-JUL-2016'+and+sample_type_new+=+'SAMP'&v_target_code=file_csv)

The link only generates data that have not been qualified. Qualified water quality data must be retrieved interactively via the DBHYDRO browser.

The provisional daily mean flow data for stations S12A, S12B, S12C, and S12D, and the "Preferred DBKEY" daily mean flow data for stations S333 and S334, during the reporting quarter can be retrieved by copying and pasting the following link into the address field of a web browser:

[http://www.sfwmd.gov/dbhydroplsql/web\\_io.report\\_process?v\\_period=uspec&v\\_start\\_date=20160401&v\\_end\\_date=20160630&v\\_report\\_type=format7&v\\_target\\_code=file\\_csv&v\\_run\\_mode=onLine&v\\_js\\_flag=Y&v\\_dbkey=03620/03626/03632/03638/15042/FB752](http://www.sfwmd.gov/dbhydroplsql/web_io.report_process?v_period=uspec&v_start_date=20160401&v_end_date=20160630&v_report_type=format7&v_target_code=file_csv&v_run_mode=onLine&v_js_flag=Y&v_dbkey=03620/03626/03632/03638/15042/FB752)

The "Preferred DBKEY" daily mean flow data for S12A, S12B, S12C, and S12D structures will be available for retrieval upon completion of the final approved flow data (expected each April).

**Table B-1.** Weekly grab TP data (parts per billion) for Shark River Slough.

Date	S12A	S12B	S12C	S12D	S333	Remarks
07/06/2015	30	---	---	---	15	N/A
07/13/2015	36	---	---	---	15	Compliance data
07/20/2015	45	---	---	---	18	N/A
07/27/2015	36	---	---	---	15	Compliance data
08/03/2015	31	---	---	---	15	N/A
08/10/2015	21	---	---	---	15	Compliance data
08/17/2015	15	---	---	---	15	N/A
08/24/2015	17	---	---	---	15	Compliance data
08/31/2015	18	---	---	---	12	N/A
09/08/2015	17	---	---	---	13	Compliance data
09/14/2015	13	---	---	---	14	N/A
09/21/2015	11	---	---	---	13	Compliance data
09/28/2015	14	---	---	---	11	N/A
10/05/2015	12	---	9	8	14	Compliance data
10/12/2015	6	6	8	16	13	N/A
10/19/2015	6	6	8	13	9	Compliance data
10/26/2015	5	5	7	9	9	N/A
11/02/2015	11	9	7	8	8	Compliance data
11/09/2015	14	10	6	9	10	N/A
11/16/2015	13	---	---	9	9	Compliance data
11/23/2015	11	---	---	10	12	N/A
12/01/2015	8	---	---	8	7	Compliance data
12/07/2015	11	7	7	9	8	N/A
12/14/2015	10	6	5	7	8	Compliance data
12/21/2015	8	6	5	8	7	N/A
12/28/2015	9	6	4	8	7	Compliance data
01/04/2016	11	---	6	8	8	N/A
01/11/2016	8	---	6	6	6	Compliance data
01/19/2016	8	---	4	7	6	N/A
01/25/2016	7	---	5	6	6	Compliance data
02/01/2016	5	---	5	8	7	N/A
02/08/2016	6	---	5	7	6	Compliance data
02/15/2016	6	---	4	6	5	N/A
02/22/2016	7	---	4	4	6	Compliance data
02/29/2016	6	---	4	4	7	N/A
03/07/2016	7	---	5	4	5	Compliance data
03/14/2016	8	---	7	8	8	N/A
03/21/2016	11	---	7	6	8	Compliance data
03/28/2016	8	---	6	6	7	N/A
04/04/2016	8	---	6	4	10	Compliance data
04/12/2016	8	---	6	5	8	N/A
04/18/2016	9	---	5	7	8	Compliance data
04/25/2016	10	---	6	7	6	N/A
05/02/2016	8	---	6	6	10	Compliance data
05/09/2016	8	---	7	6	10	N/A
05/16/2016	12	---	7	12	10	Compliance data
05/23/2016	11	---	8	12	15	N/A
05/31/2016	15	---	9	9	11	Compliance data
06/06/2016	14	---	10	14	14	N/A
06/13/2016	14	---	11	12	15	Compliance data
06/20/2016	13	---	10	12	13	N/A
06/27/2016	12	---	8	9	15	Compliance data

## Notes:

--- indicates water sample was not collected because the spillway gates were closed at the time of the site visit.

"Compliance data" indicates biweekly sampling data used for Consent Decree calculation.

"N/A" indicates biweekly sampling data presented for informational purposes only and not used for consent decree calculation

## APPENDIX C

### WEEKLY GRAB TOTAL PHOSPHORUS CONCENTRATION DATA FOR TAYLOR SLOUGH AND COASTAL BASINS

Total phosphorus concentration data used in this report can be directly retrieved from the South Florida Water Management District DBHYDRO database by copying and pasting the following link into the address field of a web browser:

[http://www.sfwmd.gov/dbhydroplsql/water\\_quality\\_data.report\\_full?v\\_where\\_clause=where+station\\_id+in+\('S332DX','S18C'\)+and+test\\_number+=+25+and+collect\\_method+=+'G'+and+date\\_collected+>='01-APR-2016'+and+date\\_collected+<+'01-JUL-2016'+and+sample\\_type\\_new+=+'SAMP'&v\\_target\\_code=file\\_csv](http://www.sfwmd.gov/dbhydroplsql/water_quality_data.report_full?v_where_clause=where+station_id+in+('S332DX','S18C')+and+test_number+=+25+and+collect_method+=+'G'+and+date_collected+>='01-APR-2016'+and+date_collected+<+'01-JUL-2016'+and+sample_type_new+=+'SAMP'&v_target_code=file_csv)

The link only generates data that have not been qualified. Qualified water quality data must be retrieved interactively via the DBHYDRO browser.

The "Preferred DBKEY" daily mean flow data for stations at Taylor Slough (S332D) and the Coastal Basins (S18C) during the reporting quarter can be retrieved by copying and pasting the following link into the address field of a web browser:

[http://www.sfwmd.gov/dbhydroplsql/web\\_io.report\\_process?v\\_period=uspec&v\\_start\\_date=20160401&v\\_end\\_date=20160630&v\\_report\\_type=format7&v\\_target\\_code=file\\_csv&v\\_run\\_mode=onLine&v\\_js\\_flag=Y&v\\_dbkey=15760/TA413](http://www.sfwmd.gov/dbhydroplsql/web_io.report_process?v_period=uspec&v_start_date=20160401&v_end_date=20160630&v_report_type=format7&v_target_code=file_csv&v_run_mode=onLine&v_js_flag=Y&v_dbkey=15760/TA413)

**Table C-1.** Weekly grab TP data (parts per billion) for Taylor Slough and Coastal Basins.

Date	S332DX	S18C	Date	S332DX	S18C
07/06/2015	9	--	01/04/2016	6	--
07/07/2015	--	4	01/05/2016	--	3
07/13/2015	9	--	01/11/2016	5	--
07/14/2015	--	6	01/12/2016	--	4
07/20/2015	10	--	01/19/2016	5	3
07/21/2015	--	5	01/25/2016	4	--
07/27/2015	7	--	01/26/2016	--	3
07/28/2015	--	3	02/01/2016	5	--
08/03/2015	6	--	02/02/2016	--	5
08/04/2015	--	4	02/08/2016	6	--
08/10/2015	6	--	02/09/2016	--	3
08/11/2015	--	4	02/15/2016	6	--
08/17/2015	6	--	02/16/2016	--	3
08/18/2015	--	4	02/22/2016	5	--
08/24/2015	4	--	02/23/2016	--	4
08/25/2015	--	4	02/29/2016	5	--
08/31/2015	6	--	03/01/2016	--	4
09/01/2015	--	4	03/07/2016	5	--
09/08/2015	5	4	03/08/2016	--	4
09/14/2015	5	--	03/14/2016	6	--
09/15/2015	--	3	03/15/2016	--	4
09/21/2015	5	--	03/21/2016	6	--
09/22/2015	--	4	03/22/2016	--	4
09/28/2015	6	--	03/28/2016	6	--
09/29/2015	--	4	03/29/2016	--	4
10/05/2015	5	--	04/04/2016	6	--
10/06/2015	--	2	04/05/2016	--	4
10/12/2015	6	--	04/11/2016	5	--
10/13/2015	--	4	04/12/2016	--	5
10/19/2015	6	--	04/18/2016	6	--
10/20/2015	--	4	04/19/2016	--	5
10/26/2015	6	--	04/25/2016	6	--
10/27/2015	--	3	04/26/2016	--	5
11/02/2015	5	--	05/02/2016	7	--
11/03/2015	--	2	05/03/2016	--	3
11/09/2015	7	--	05/09/2016	6	--
11/10/2015	--	2	05/10/2016	--	4
11/16/2015	5	--	05/16/2016	6	--
11/17/2015	--	4	05/17/2016	--	3
11/23/2015	4	--	05/23/2016	7	--
11/24/2015	--	4	05/24/2016	--	4
11/30/2015	5	--	05/31/2016	6	--
12/01/2015	--	3	06/01/2016	--	4
12/07/2015	7	--	06/06/2016	6	--
12/08/2015	--	9	06/07/2016	--	4
12/14/2015	6	--	06/13/2016	5	--
12/15/2015	--	4	06/14/2016	--	4
12/21/2015	4	--	06/20/2016	5	--
12/22/2015	--	3	06/21/2016	--	4
12/28/2015	6	--	06/27/2016	7	--
12/29/2015	--	3	06/28/2016	--	4

## Notes:

-- indicates water sample was not collected.

**APPENDIX D**

**CALCULATION METHODS**

## Long Term Marsh Concentration Levels for Loxahatchee National Wildlife Refuge

### Long Term Marsh Concentration Levels:

$$C = 10.7172 - 0.541156S + 1.372\sqrt{7.5819 - 0.9310S + 0.02902216S^2}$$

### Terms:

C = the natural log of the geometric mean total phosphorus concentration across 14 marsh stations.

S = average stage measured at gauges CA1-9, CA1-7, and CA1-8C on sampling date (feet).

This equation is applicable over a stage range of 15.42 to 17.14 feet. If the stage on any sampling date exceeds 17.14 feet, a stage of 17.14 feet should be used in calculating the long term concentration levels. The equation shall not apply to dates when the average stage is less than 15.42 feet.

*(1991 Settlement Agreement entered as a Consent Decree in 1992 and modified in 1995, Exhibit B, Appendix B, Attachment II, page B-7)*

## Discharge Limits and OFW Standards for Shark River Slough

### Interim Discharge Limit:

$$C = 11.16 - 0.00465Q + 1.397\sqrt{6.377 - 0.00591Q + 0.00000436Q^2}$$

### Long-Term Discharge Limit & OFW Standard:

$$C = 11.38 - 0.00538Q + 1.397\sqrt{2.493 - 0.00231Q + 0.00000170Q^2}$$

### Frequency Exceedance:

$$F = 48.411 - 0.02896Q + 1.397\sqrt{330.1 - 0.3071Q + 0.0002254Q^2}$$

### Terms:

Water Year = October through September

Q = total inflow to Shark River Slough for water year, S-12s + S-333 + any additional inflow from the WCAs established in the future, thousand acre-ft/yr (Kac-ft/yr).

C = limit on maximum flow-weighted-mean inflow concentration for any Water Year, composite of all inflows to Shark Slough (ppb).

F = exceedance for maximum frequency (percent) of inflow concentrations exceeding 10 ppb, computed from the time series of concentrations composited across all inflow structures on each sampling date with positive flow in a given Water Year.

The range of flow (Q) used in deriving the limits is 117 to 1061 Kac-ft/yr. If the total flow for any water year exceeds 1061 Kac-ft/yr, a flow of 1061 Kac-ft/yr should be used in calculating the discharge limits.

*(1991 Settlement Agreement entered as a Consent Decree in 1992 and modified in 1995, Exhibit B, Appendix A, Attachment I, page A-5)*

Note: Technical Oversight Committee members agreed to the set of inflow structures used to determine the phosphorus limits for the inflows to Shark River Slough in March 16, 1999, and May 25, 1999, meetings. The combined flows and loads of the S-12s shall be added to the flows and loads of S-333, S355A and B, minus the flow and load discharged from S-334, to determine the Shark River Slough limits.

## Discharge Limits and OFW Standards for Taylor Slough and Coastal Basins

Long-Term Flow-Weighted Discharge Limit & OFW Standard = 11.0 ppb

### Frequency Exceedance:

Frequency of values > 10 ppb must be less than 53.1%.

### Terms:

Limits are defined on a Water Year basis, October through September.

Basin flow is the total flow through structures S-332, S-175, S-18C, plus any new release points from this basin established in the future, thousand acre-ft/yr (Kac-ft/yr).

Limits apply to the flow-weighted-mean concentration for any Water Year, composite of all inflows to Taylor Slough (S-332) and Coastal Basin (S-18C).

Frequency exceedance is the exceedance for maximum frequency (percent) of inflow concentrations exceeding 10 ppb, computed from the time series of concentrations composited across all inflow structures on each sampling date with positive flow in a given Water Year.

*(1991 Settlement Agreement entered as a Consent Decree in 1992 and modified in 1995, Exhibit B, Appendix A, Attachment II, page A-6)*

**APPENDIX E**

**DOCUMENT REVISIONS**

**Table E-1.** Revisions to this report since initial publication.

Page/Date	Original	Revision